

US011171941B2

(12) **United States Patent**  
**Cicchitto**

(10) **Patent No.:** **US 11,171,941 B2**  
(45) **Date of Patent:** **Nov. 9, 2021**

(54) **MOBILE DEVICE ENABLED DESKTOP TETHERED AND TETHERLESS AUTHENTICATION**

(58) **Field of Classification Search**  
CPC ..... H04L 63/083; H04L 63/0815; H04L 2463/082; H04W 12/068; H04W 12/069  
USPC ..... 726/6  
See application file for complete search history.

(71) Applicant: **Nelson A. Cicchitto**, San Ramon, CA (US)

(56) **References Cited**

(72) Inventor: **Nelson A. Cicchitto**, San Ramon, CA (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **Nelson A. Cicchitto**, San Ramon, CA (US)

7,058,817 B1 6/2006 Ellmore  
7,103,666 B2 9/2006 Royer et al.  
7,240,364 B1 \* 7/2007 Branscomb ..... H04L 29/12113 726/5

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

7,346,923 B2 3/2008 Atkins et al.  
(Continued)

(21) Appl. No.: **15/970,780**

FOREIGN PATENT DOCUMENTS

(22) Filed: **May 3, 2018**

EP 1089516 A3 8/2002

(65) **Prior Publication Data**

US 2018/0255045 A1 Sep. 6, 2018

OTHER PUBLICATIONS

Grassi, Paul A., et al., "Digital Identity Guidelines", NIST Special Publication 800-63 Revision 3, Jun. 2017, 1-53.

(Continued)

**Related U.S. Application Data**

(60) Continuation-in-part of application No. 15/626,997, filed on Jun. 19, 2017, now Pat. No. 9,979,715, which is a division of application No. 15/052,747, filed on Feb. 24, 2016, now Pat. No. 9,686,273.

*Primary Examiner* — Aravind K Moorthy

(74) *Attorney, Agent, or Firm* — Michael A. Glenn; Perkins Coie LLP

(60) Provisional application No. 62/120,153, filed on Feb. 24, 2015, provisional application No. 62/501,027, filed on May 3, 2017.


(57) **ABSTRACT**

A technique is provided that integrates authentication from a mobile device (e.g., using biometrics, social informational data, questions and answers, and more) to allow login to laptops and desktops while they are disconnected from the Internet using a USB cable connection, Bluetooth or local wifi or any other similar protocol and/or connected to Internet without USB. The technique provides a cloud clearinghouse that ties a person's or entity's mobile device(s) to an identity that's used to authenticate a person (could be the same person) on a laptop, desktop, or similar computer system.

(51) **Int. Cl.**  
**H04L 29/06** (2006.01)  
**H04W 12/06** (2021.01)  
**H04W 12/069** (2021.01)

(52) **U.S. Cl.**  
CPC ..... **H04L 63/0815** (2013.01); **H04L 63/083** (2013.01); **H04W 12/068** (2021.01); **H04W 12/069** (2021.01)

**19 Claims, 17 Drawing Sheets**

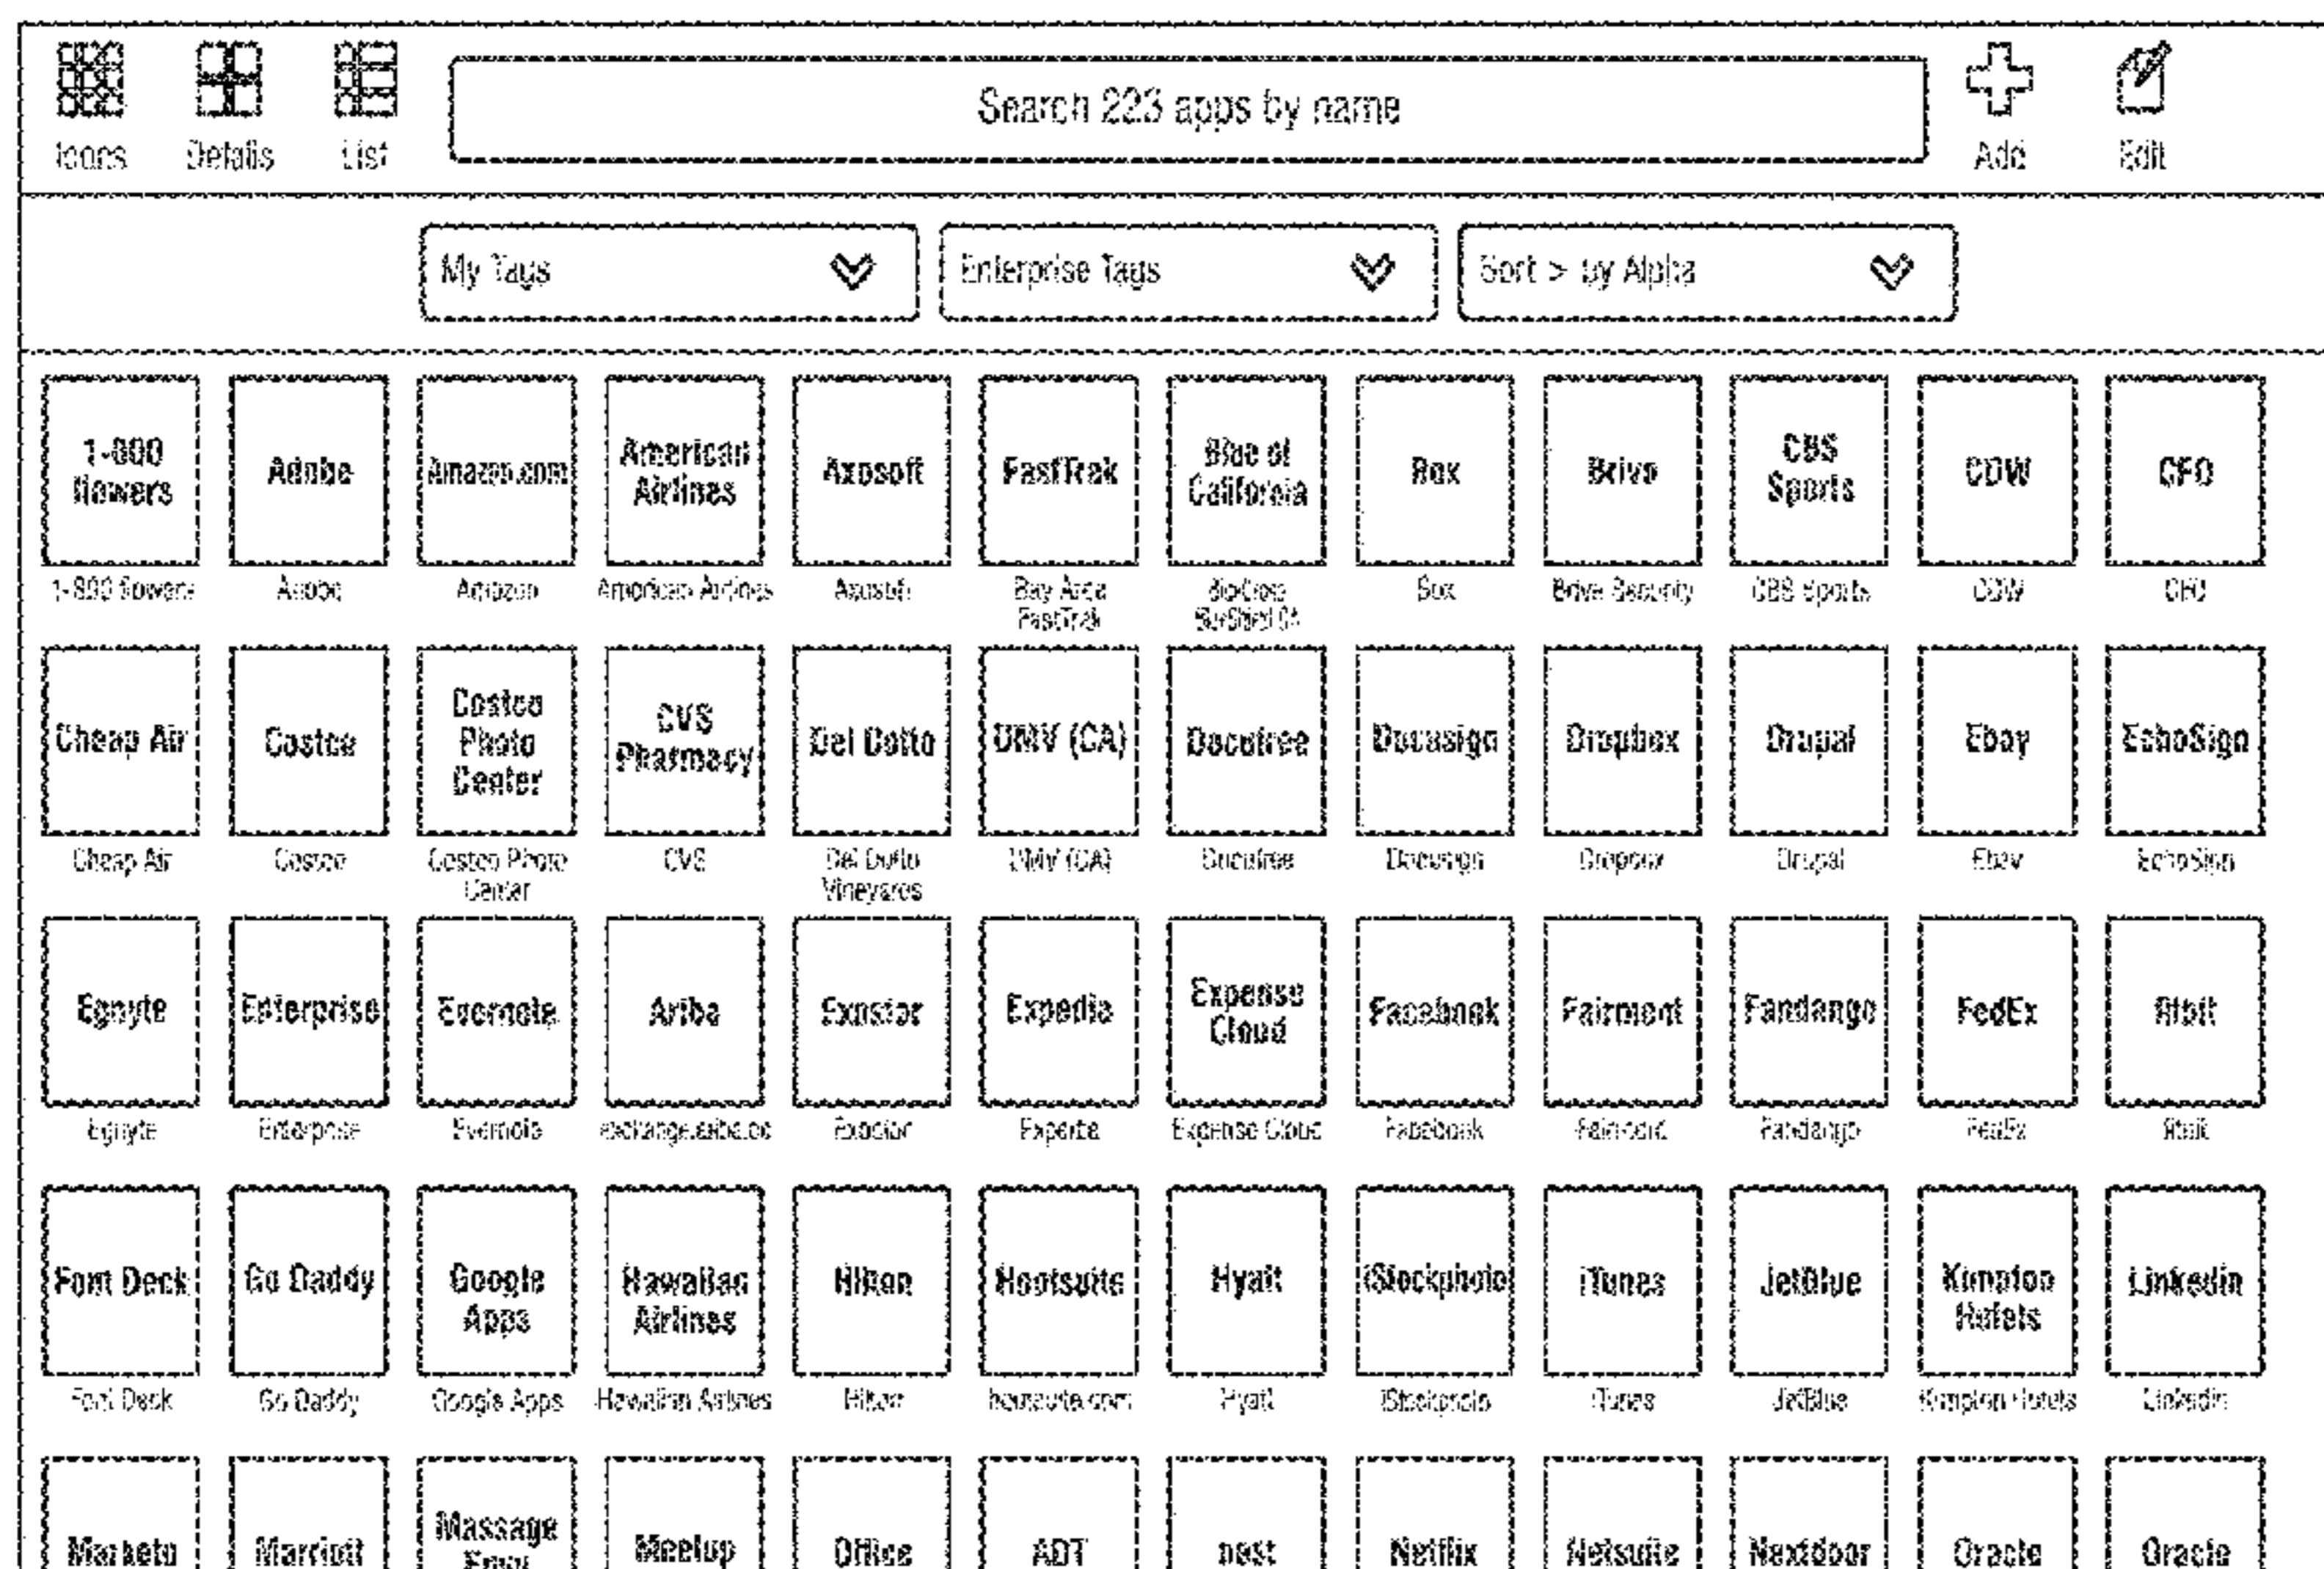

(56)

References Cited

U.S. PATENT DOCUMENTS

7,490,347	B1	2/2009	Schneider et al.	2013/0290475	A1	10/2013	Flagg et al.
7,536,389	B1	5/2009	Prabhakar et al.	2013/0314208	A1	11/2013	Risheq et al.
8,073,810	B2	12/2011	Maes et al.	2014/0040020	A1	2/2014	Shanmugam et al.
8,533,773	B2	9/2013	Maes et al.	2014/0047510	A1*	2/2014	Belton ..... H04W 12/069 726/4
8,589,338	B2	11/2013	Maes et al.	2014/0059029	A1	2/2014	Magill et al.
9,026,592	B1	5/2015	Marra	2014/0095874	A1*	4/2014	Desai ..... H04L 63/0815 713/168
9,065,827	B1	6/2015	Taylor et al.	2014/0123157	A1*	5/2014	Keskitalo ..... G06F 3/0484 719/328
9,130,910	B1*	9/2015	Logue ..... H04L 63/0428	2014/0130159	A1	5/2014	Raman
9,357,022	B1	5/2016	Chou et al.	2014/0172837	A1	6/2014	Sommer
9,363,283	B1	6/2016	Herrera-Yagüe et al.	2014/0221012	A1*	8/2014	Uetabira ..... H04W 4/029 455/456.3
9,497,312	B1	11/2016	Johansson et al.	2014/0241519	A1	8/2014	Watson et al.
9,628,576	B1	4/2017	Agarwal et al.	2014/0250499	A1*	9/2014	Vercruysse ..... H04L 9/3215 726/4
9,645,789	B1	5/2017	Lee et al.	2014/0258547	A1*	9/2014	Scavo ..... H04L 29/06 709/227
9,749,305	B1	8/2017	Sharifi Mehr et al.	2014/0273963	A1*	9/2014	Su ..... G06F 21/32 455/411
9,801,066	B1	10/2017	Hanley et al.	2014/0279038	A1	9/2014	Lombard
9,807,073	B1	10/2017	Miller	2014/0282870	A1	9/2014	Markwordt et al.
10,032,037	B1	7/2018	Allen	2014/0282977	A1	9/2014	Madhu et al.
10,050,976	B2*	8/2018	Disraeli ..... G06F 21/31	2014/0317689	A1*	10/2014	Mogush ..... H04L 63/126 726/4
10,469,487	B1*	11/2019	Griffin ..... H04L 9/3242	2014/0330651	A1	11/2014	Klemm et al.
2002/0087894	A1	7/2002	Foley et al.	2015/0025980	A1	1/2015	Zaretsky et al.
2002/0112183	A1*	8/2002	Baird, III ..... G06F 21/31 726/9	2015/0028996	A1*	1/2015	Agrafioti ..... G06F 21/34 340/5.82
2003/0163738	A1	8/2003	Couillard et al.	2015/0046340	A1	2/2015	Dimmick
2003/0182548	A1	9/2003	Xiong et al.	2015/0089613	A1*	3/2015	Tippett ..... H04L 63/0853 726/7
2004/0168059	A1	8/2004	Patrick	2015/0095137	A1	4/2015	Savelli et al.
2005/0204405	A1*	9/2005	Wormington .... H04N 21/44204 726/27	2015/0106924	A1*	4/2015	Shahbazi ..... H04W 12/0804 726/22
2005/0238159	A1	10/2005	Halsell et al.	2015/0113007	A1	4/2015	Hatchard et al.
2006/0075230	A1*	4/2006	Baird, III ..... H04L 63/083 713/168	2015/0119002	A1*	4/2015	Chen ..... H04L 67/306 455/414.1
2007/0143860	A1	6/2007	Hardt	2015/0124963	A1*	5/2015	McCusker ..... H04L 9/3073 380/46
2007/0214494	A1	9/2007	Uruta et al.	2015/0127678	A1	5/2015	Alvi et al.
2008/0263632	A1*	10/2008	Keon ..... H04L 12/2854 726/3	2015/0134433	A1	5/2015	Muller
2008/0289006	A1	11/2008	Hock et al.	2015/0149373	A1	5/2015	Chhaya et al.
2009/0017847	A1	1/2009	Mendiola et al.	2015/0149529	A1	5/2015	Loader et al.
2009/0282256	A1*	11/2009	Rakic ..... H04L 63/12 713/176	2015/0195295	A1	7/2015	Sandler et al.
2009/0288143	A1*	11/2009	Stebila ..... H04W 12/0608 726/3	2015/0205794	A1	7/2015	Allen et al.
2009/0292814	A1	11/2009	Ting et al.	2015/0245204	A1*	8/2015	Heydon ..... H04L 41/14 713/171
2009/0292927	A1	11/2009	Wenzel et al.	2015/0261756	A1	9/2015	Klemm et al.
2010/0088696	A1*	4/2010	Stoev ..... H04L 67/34 717/178	2015/0264084	A1	9/2015	Kashyap et al.
2011/0125550	A1	5/2011	Erhart et al.	2015/0302302	A1	10/2015	Kim et al.
2011/0130172	A1*	6/2011	Rao ..... H04L 67/42 455/566	2015/0304330	A1	10/2015	Soamboonsrup et al.
2011/0153740	A1	6/2011	Smith et al.	2015/0332067	A1	11/2015	Gorod
2011/0197287	A1*	8/2011	Hess ..... G06Q 10/06 726/30	2016/0012194	A1	1/2016	Prakash et al.
2011/0246196	A1*	10/2011	Bhaskaran ..... G10L 17/24 704/235	2016/0019546	A1	1/2016	Eisen
2012/0047147	A1	2/2012	Redstone et al.	2016/0028688	A1	1/2016	Chizhov et al.
2012/0054357	A1	3/2012	Kuritzky et al.	2016/0048662	A1	2/2016	Arnoud et al.
2012/0072979	A1*	3/2012	Cha ..... G06F 21/34 726/7	2016/0050234	A1*	2/2016	Choyi ..... H04L 63/0281 726/1
2012/0110072	A1	5/2012	De	2016/0070704	A1	3/2016	Yu
2012/0215621	A1	8/2012	Heffernan et al.	2016/0087957	A1*	3/2016	Shah ..... H04L 63/08 726/1
2012/0226678	A1	9/2012	Park et al.	2016/0110083	A1	4/2016	Kranendonk et al.
2012/0278241	A1*	11/2012	Brown ..... G06Q 20/3229 705/67	2016/0112397	A1	4/2016	Mankovskii
2013/0035982	A1	2/2013	Zhang et al.	2016/0117328	A1	4/2016	Mondal et al.
2013/0036459	A1*	2/2013	Liberman ..... H04L 63/102 726/6	2016/0117355	A1	4/2016	Krishnamurthy
2013/0090084	A1	4/2013	Cherubini et al.	2016/0132904	A1	5/2016	Mondal et al.
2013/0122934	A1	5/2013	Branch et al.	2016/0134599	A1*	5/2016	Ross ..... H04W 12/0609 713/168
2013/0124539	A1	5/2013	Lin et al.	2016/0155089	A1*	6/2016	Nakashima ..... G06F 17/50 705/7.25
2013/0179681	A1*	7/2013	Benson ..... H04W 12/04 713/155	2016/0164922	A1	6/2016	Boss et al.
2013/0254283	A1	9/2013	Garcia-Martinez et al.	2016/0171513	A1	6/2016	Takeda et al.
2013/0263021	A1	10/2013	Dunn et al.	2016/0173500	A1	6/2016	Sharabi et al.
2013/0268994	A1	10/2013	Cooper et al.	2016/0182556	A1	6/2016	Tatourian et al.
2013/0282589	A1*	10/2013	Shoup ..... H04L 63/08 705/67	2016/0217489	A1	7/2016	Allard et al.
				2016/0239573	A1	8/2016	Albert et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2016/0285633 A1\* 9/2016 Allinson ..... G06F 21/34  
 2016/0328216 A1\* 11/2016 Leonelli ..... G06F 8/41  
 2016/0350309 A1 12/2016 Chatterjee et al.  
 2016/0366589 A1\* 12/2016 Jean ..... H04W 12/0608  
 2016/0381227 A1 12/2016 Singh et al.  
 2017/0039476 A1 2/2017 Eyring et al.  
 2017/0046714 A1 2/2017 Van De Velde et al.  
 2017/0053280 A1 2/2017 Lishok et al.  
 2017/0064020 A1 3/2017 Obukhov et al.  
 2017/0076293 A1\* 3/2017 Cage ..... H04L 63/0853  
 2017/0085568 A1 3/2017 Rolfe et al.  
 2017/0091289 A1 3/2017 Ohazulike et al.  
 2017/0093829 A1 3/2017 Gitlin et al.  
 2017/0099358 A1 4/2017 Perez et al.  
 2017/0132203 A1 5/2017 Kim et al.  
 2017/0140643 A1\* 5/2017 Puppo ..... G08C 17/02  
 2017/0142035 A1 5/2017 Bradley et al.  
 2017/0154359 A1 6/2017 Zukerman  
 2017/0161272 A1 6/2017 Tada et al.  
 2017/0180539 A1\* 6/2017 Payack, Jr. .... G07C 9/00309  
 2017/0201520 A1\* 7/2017 Chandoor ..... H04L 63/108  
 2017/0201550 A1 7/2017 Benson et al.  
 2017/0221156 A1 8/2017 Mingarelli et al.  
 2017/0277691 A1 9/2017 Agarwal  
 2017/0300946 A1 10/2017 Wilkinson et al.  
 2017/0318007 A1\* 11/2017 Cleeve ..... H04L 9/3234  
 2017/0339631 A1\* 11/2017 Pugaczewski ..... H04L 63/101  
 2017/0353442 A1\* 12/2017 Burch ..... H04L 63/0853  
 2017/0364912 A1 12/2017 Ross et al.  
 2017/0374090 A1 12/2017 McGrew et al.  
 2018/0007062 A1 1/2018 Maheshwari et al.  
 2018/0032722 A1\* 2/2018 Carlson ..... H04L 63/1425  
 2018/0048472 A1\* 2/2018 Pirrwitz ..... H04L 63/0815  
 2018/0054467 A1 2/2018 Abou Mahmoud et al.

2018/0089318 A1 3/2018 Chatterjee et al.  
 2018/0110475 A1\* 4/2018 Shaya ..... G16H 40/63  
 2018/0114216 A1 4/2018 Joseph et al.  
 2018/0130002 A1 5/2018 Dekoekkoek et al.  
 2018/0158061 A1\* 6/2018 Edelstein ..... G06Q 20/4016  
 2018/0158100 A1 6/2018 Barak et al.  
 2018/0196813 A1 7/2018 Lin et al.  
 2018/0204260 A1\* 7/2018 McGregor ..... G06Q 30/0609  
 2018/0218356 A1\* 8/2018 Grassadonia ..... G06Q 20/322  
 2018/0232641 A1 8/2018 Bostick et al.  
 2018/0262471 A1\* 9/2018 Pereira ..... G06Q 20/12  
 2018/0287883 A1\* 10/2018 Joshi ..... H04L 67/34  
 2018/0295146 A1 10/2018 Kovega et al.  
 2018/0324126 A1 11/2018 Grant et al.  
 2018/0337932 A1\* 11/2018 Juster ..... H04L 63/145  
 2018/0367526 A1\* 12/2018 Huang ..... H04L 9/3297  
 2019/0034976 A1 1/2019 Hamedi et al.  
 2019/0042656 A1 2/2019 Germishuys  
 2019/0052722 A1 2/2019 Gasking  
 2019/0087746 A1 3/2019 Jain et al.  
 2019/0102459 A1 4/2019 Patterson  
 2019/0108209 A1 4/2019 Ahuja et al.  
 2019/0109842 A1\* 4/2019 Kumar ..... H04L 63/0853  
 2019/0124023 A1 4/2019 Conroy et al.  
 2019/0158491 A1 5/2019 Burmester et al.  
 2019/0245871 A1 8/2019 Ward et al.

OTHER PUBLICATIONS

Grassi, Paul A., et al., "Digital Identity Guidelines", NIST Special Publication 800-63A, Jun. 2017, 1-32.  
 Grassi, Paul A., et al., "Digital Identity Guidelines", NIST Special Publication 800-63C, Jun. 2017, 1-34.  
 Grassi, Paul A., et al., "Digital Identity Guidelines", NIST Special Publication 800-63B, Jun. 2017, 1-55.

\* cited by examiner



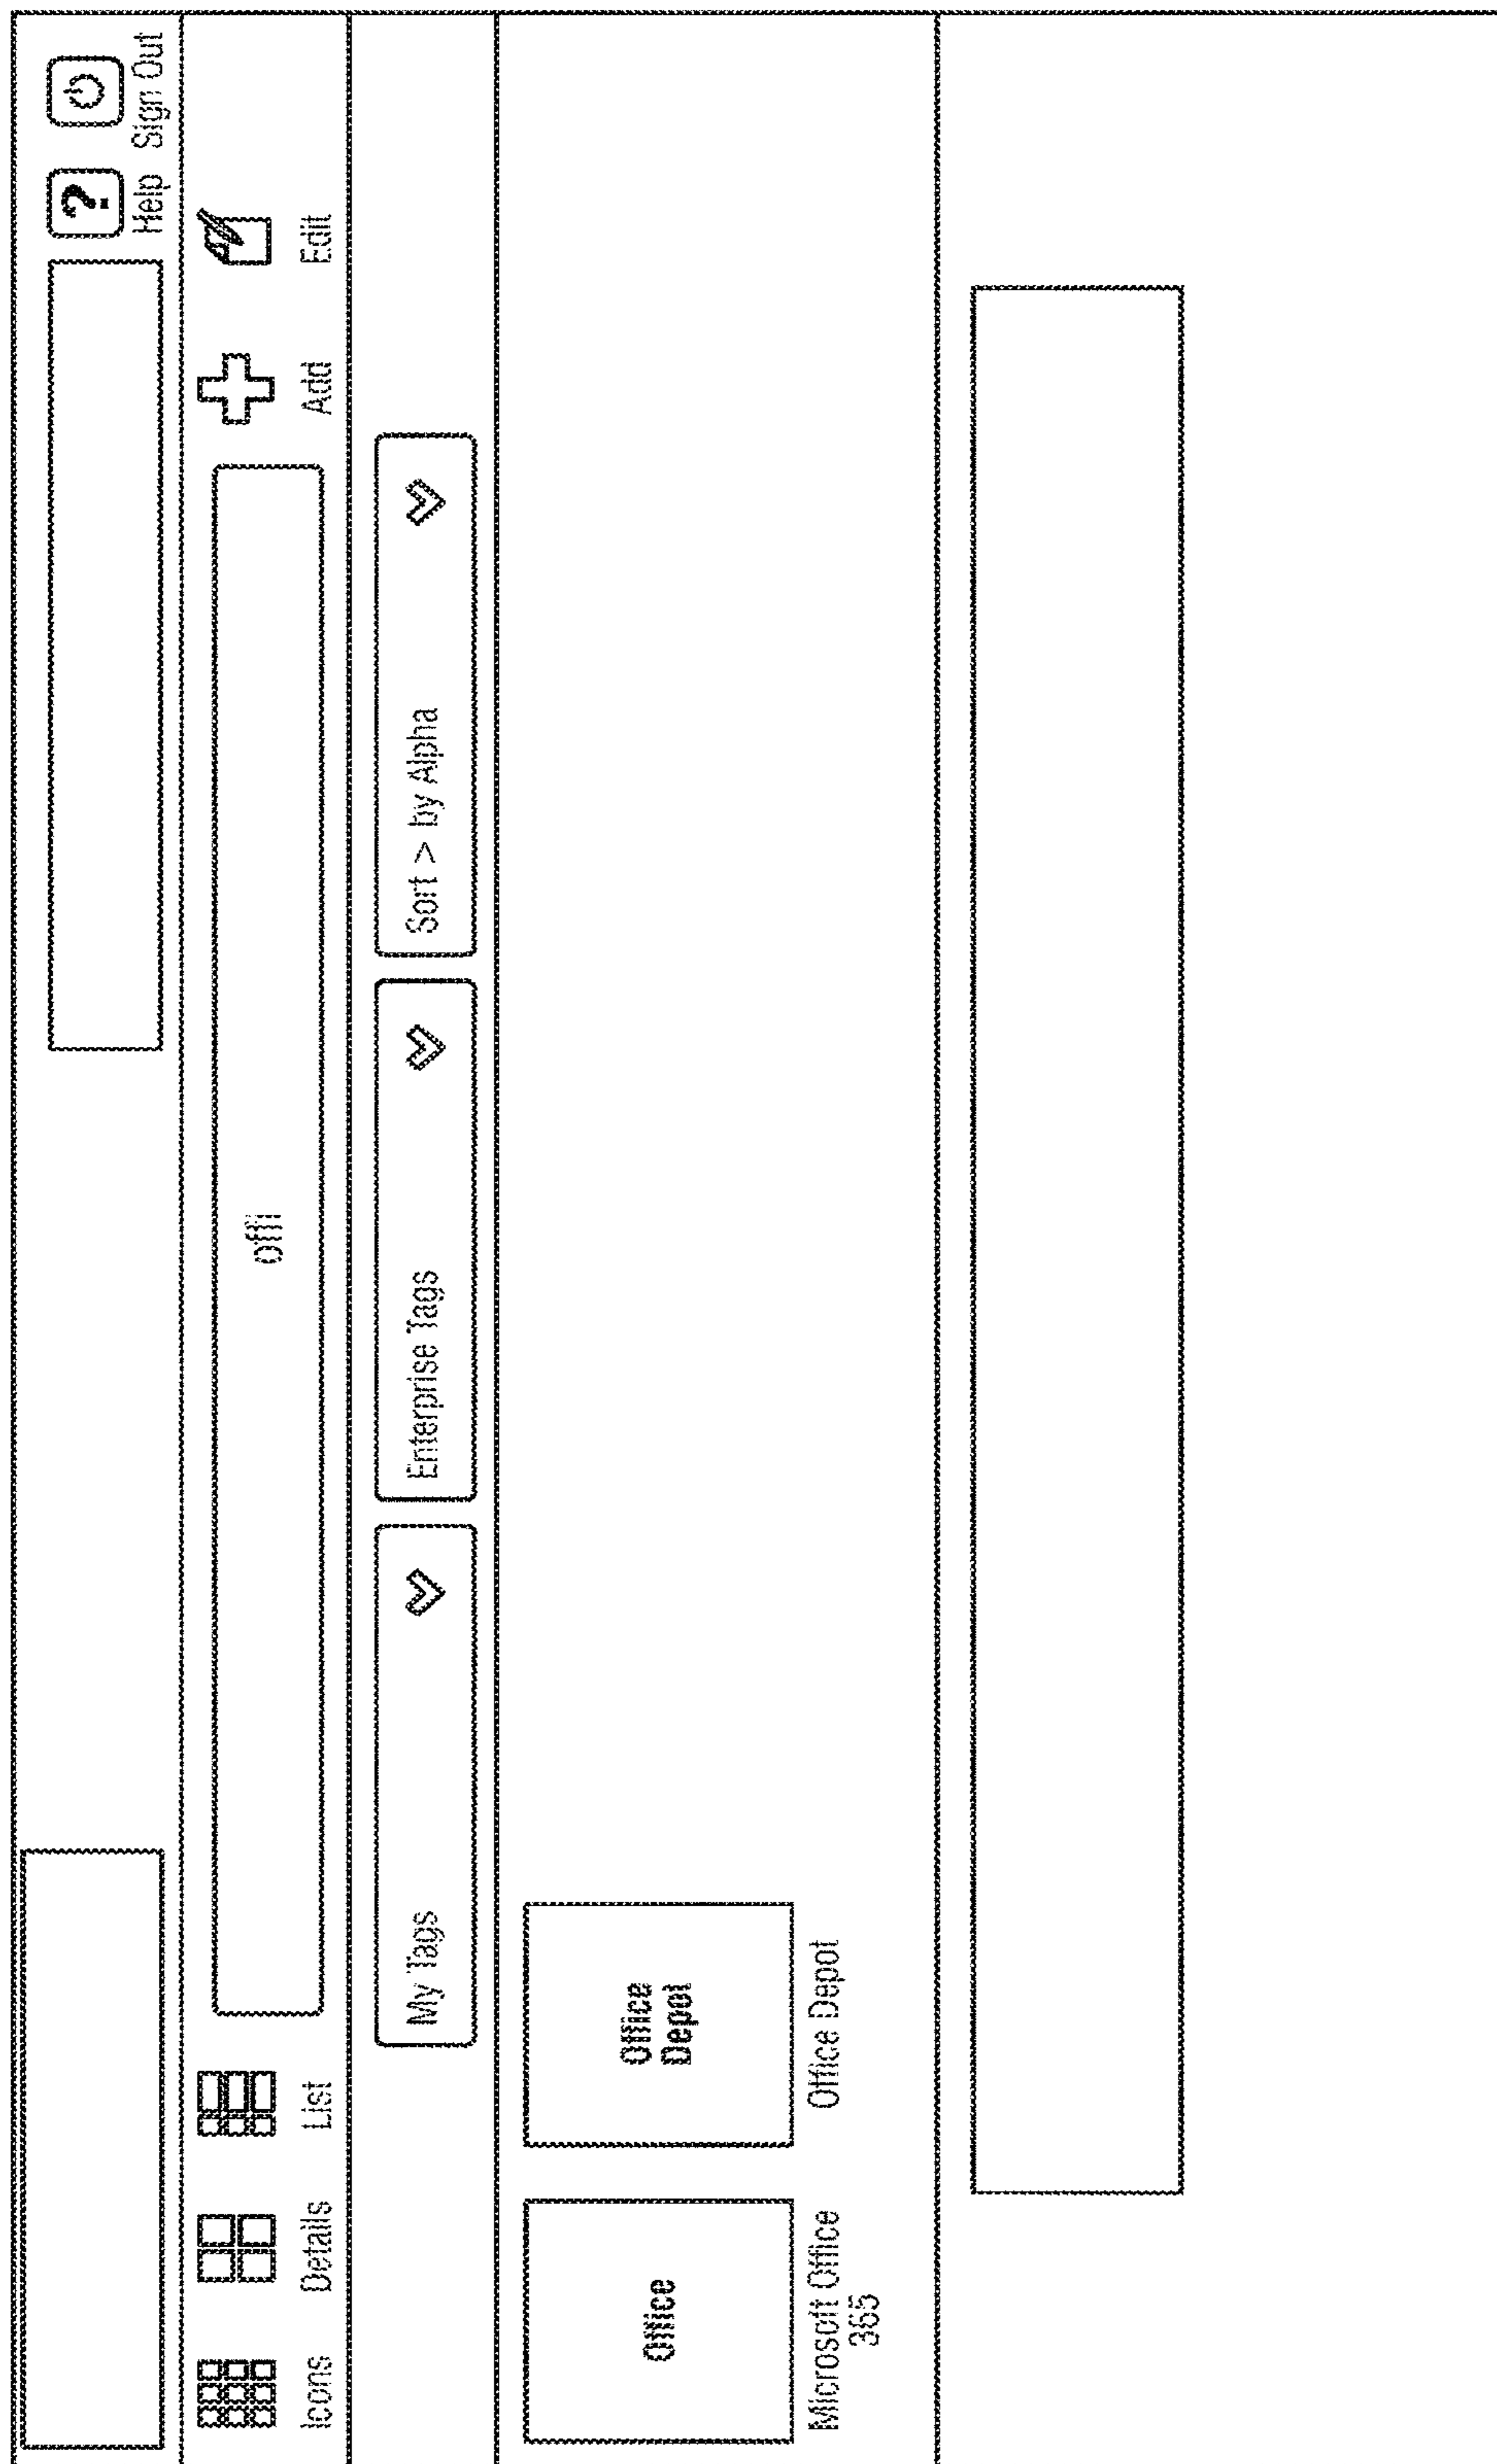


FIG. 2

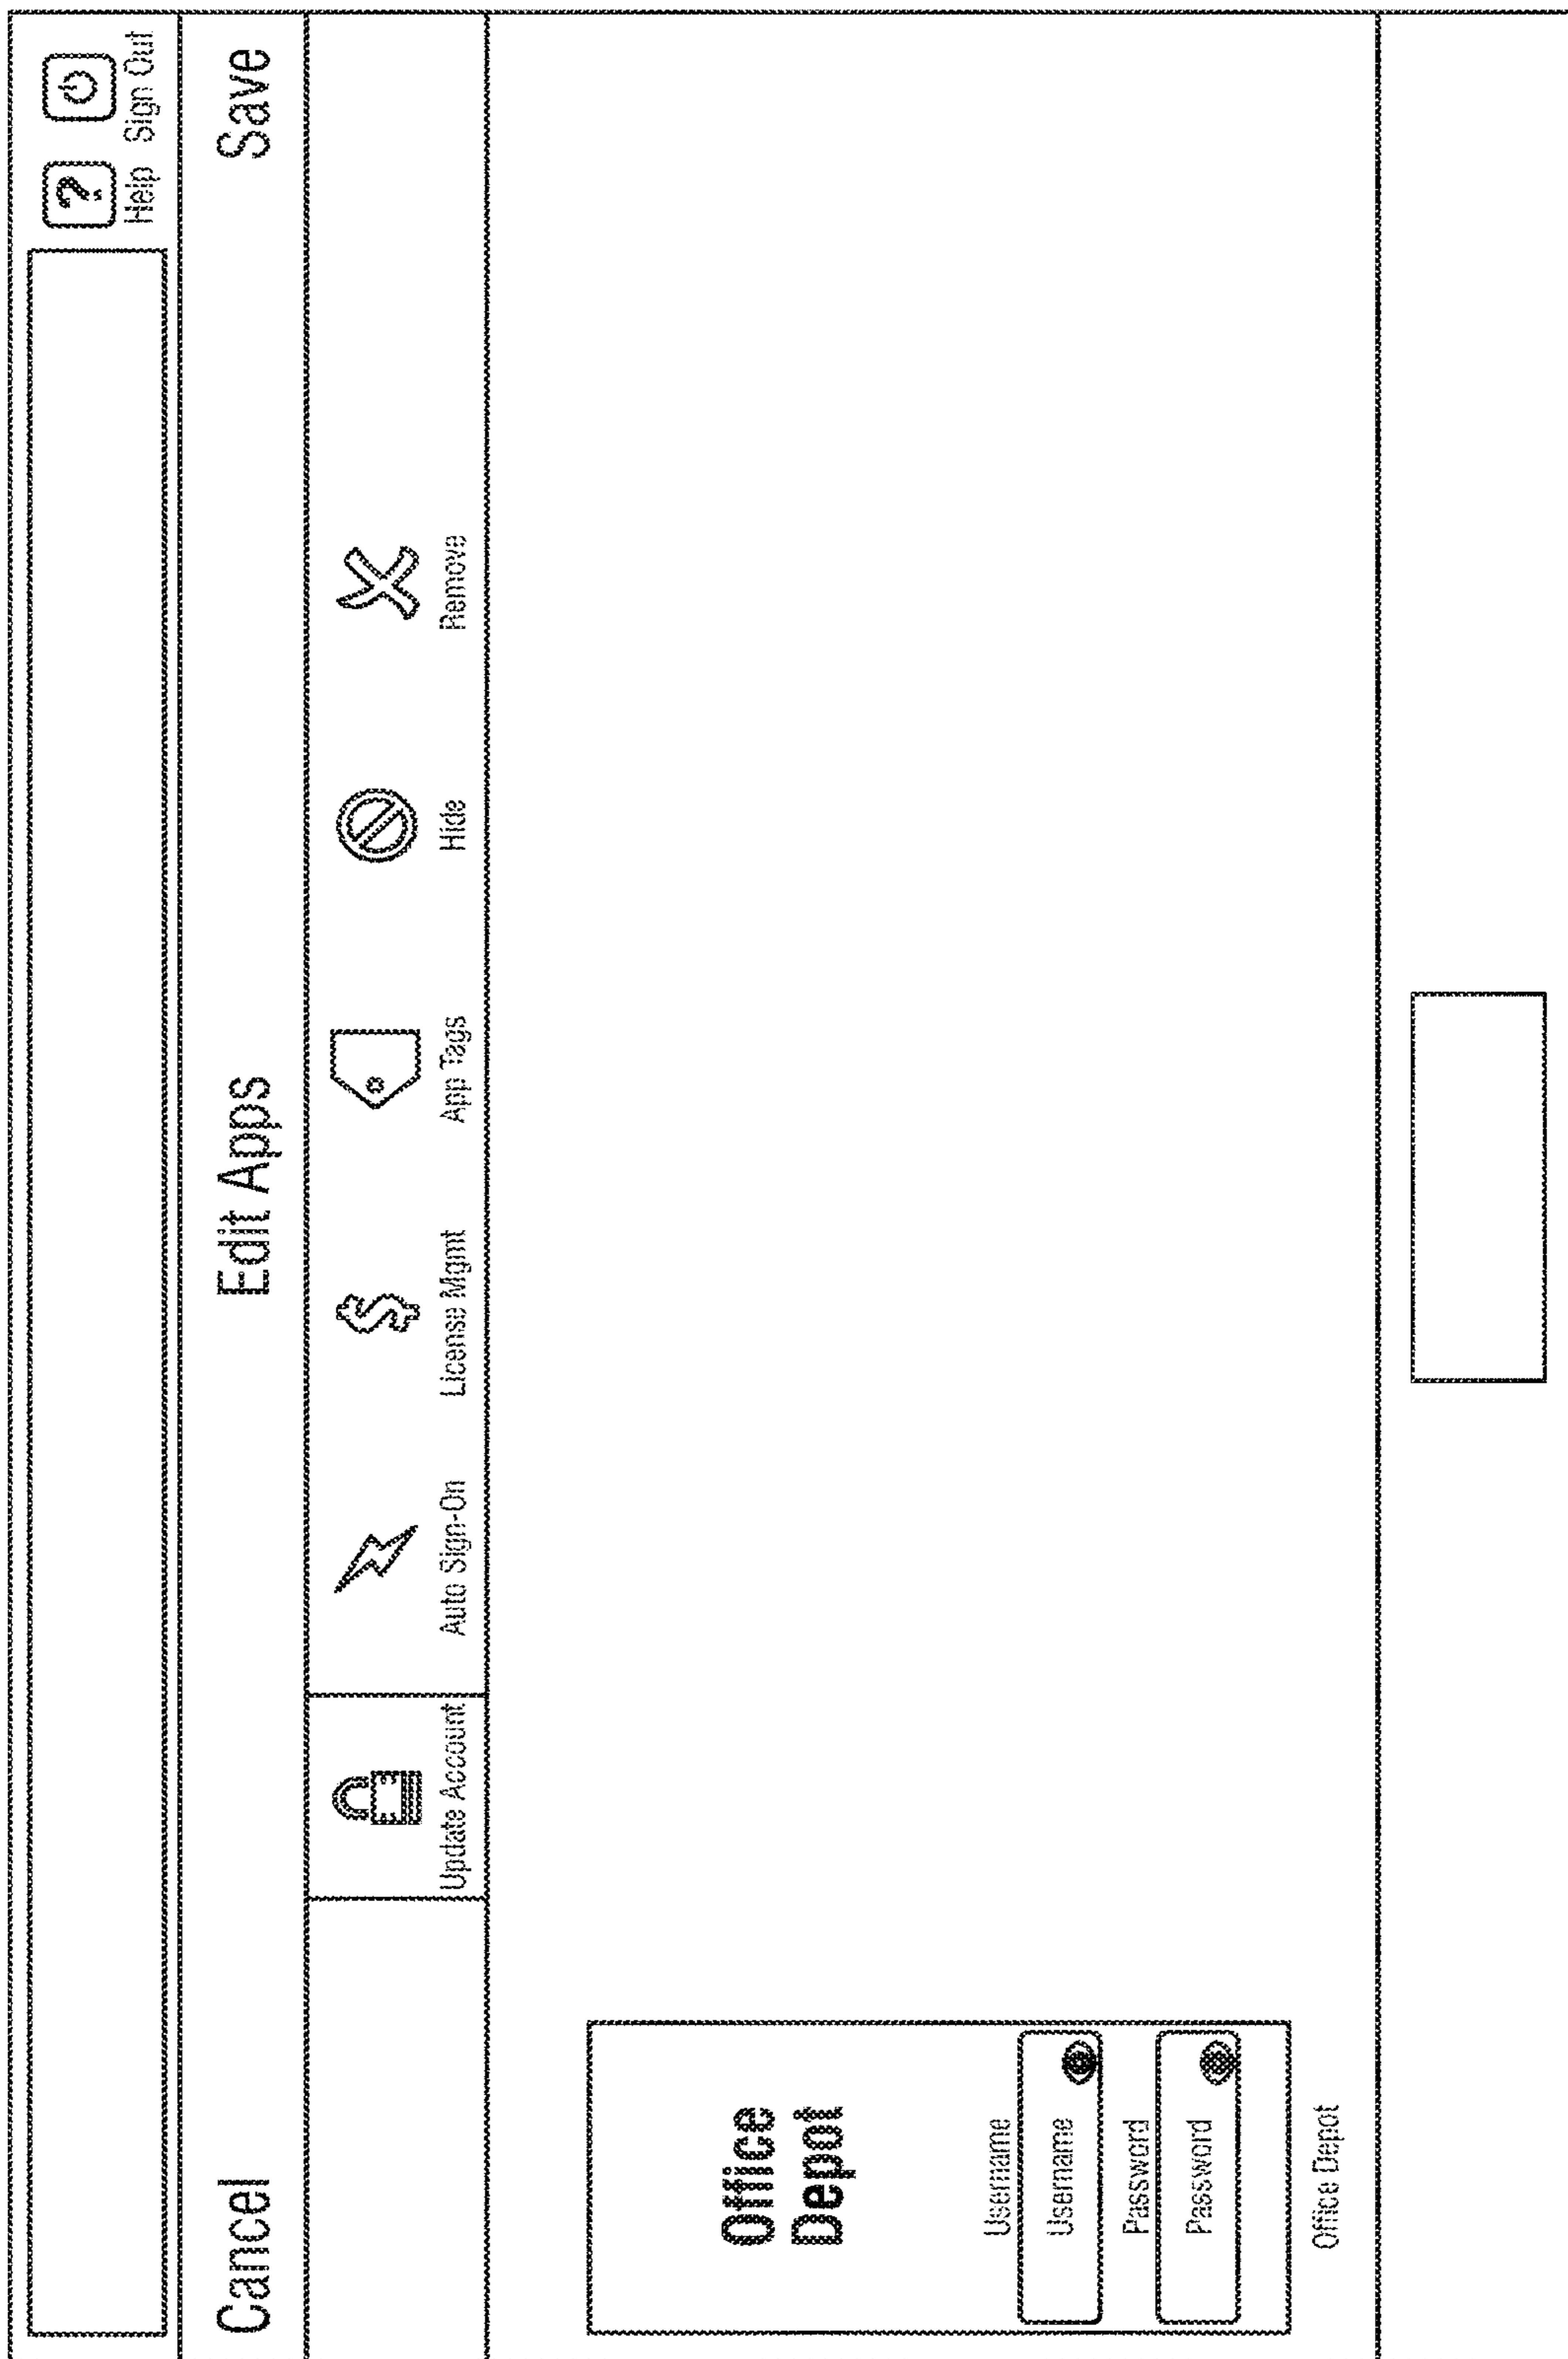


FIG. 3

(SSO w/o USERNAME or PASSWORD from SSO Provider)

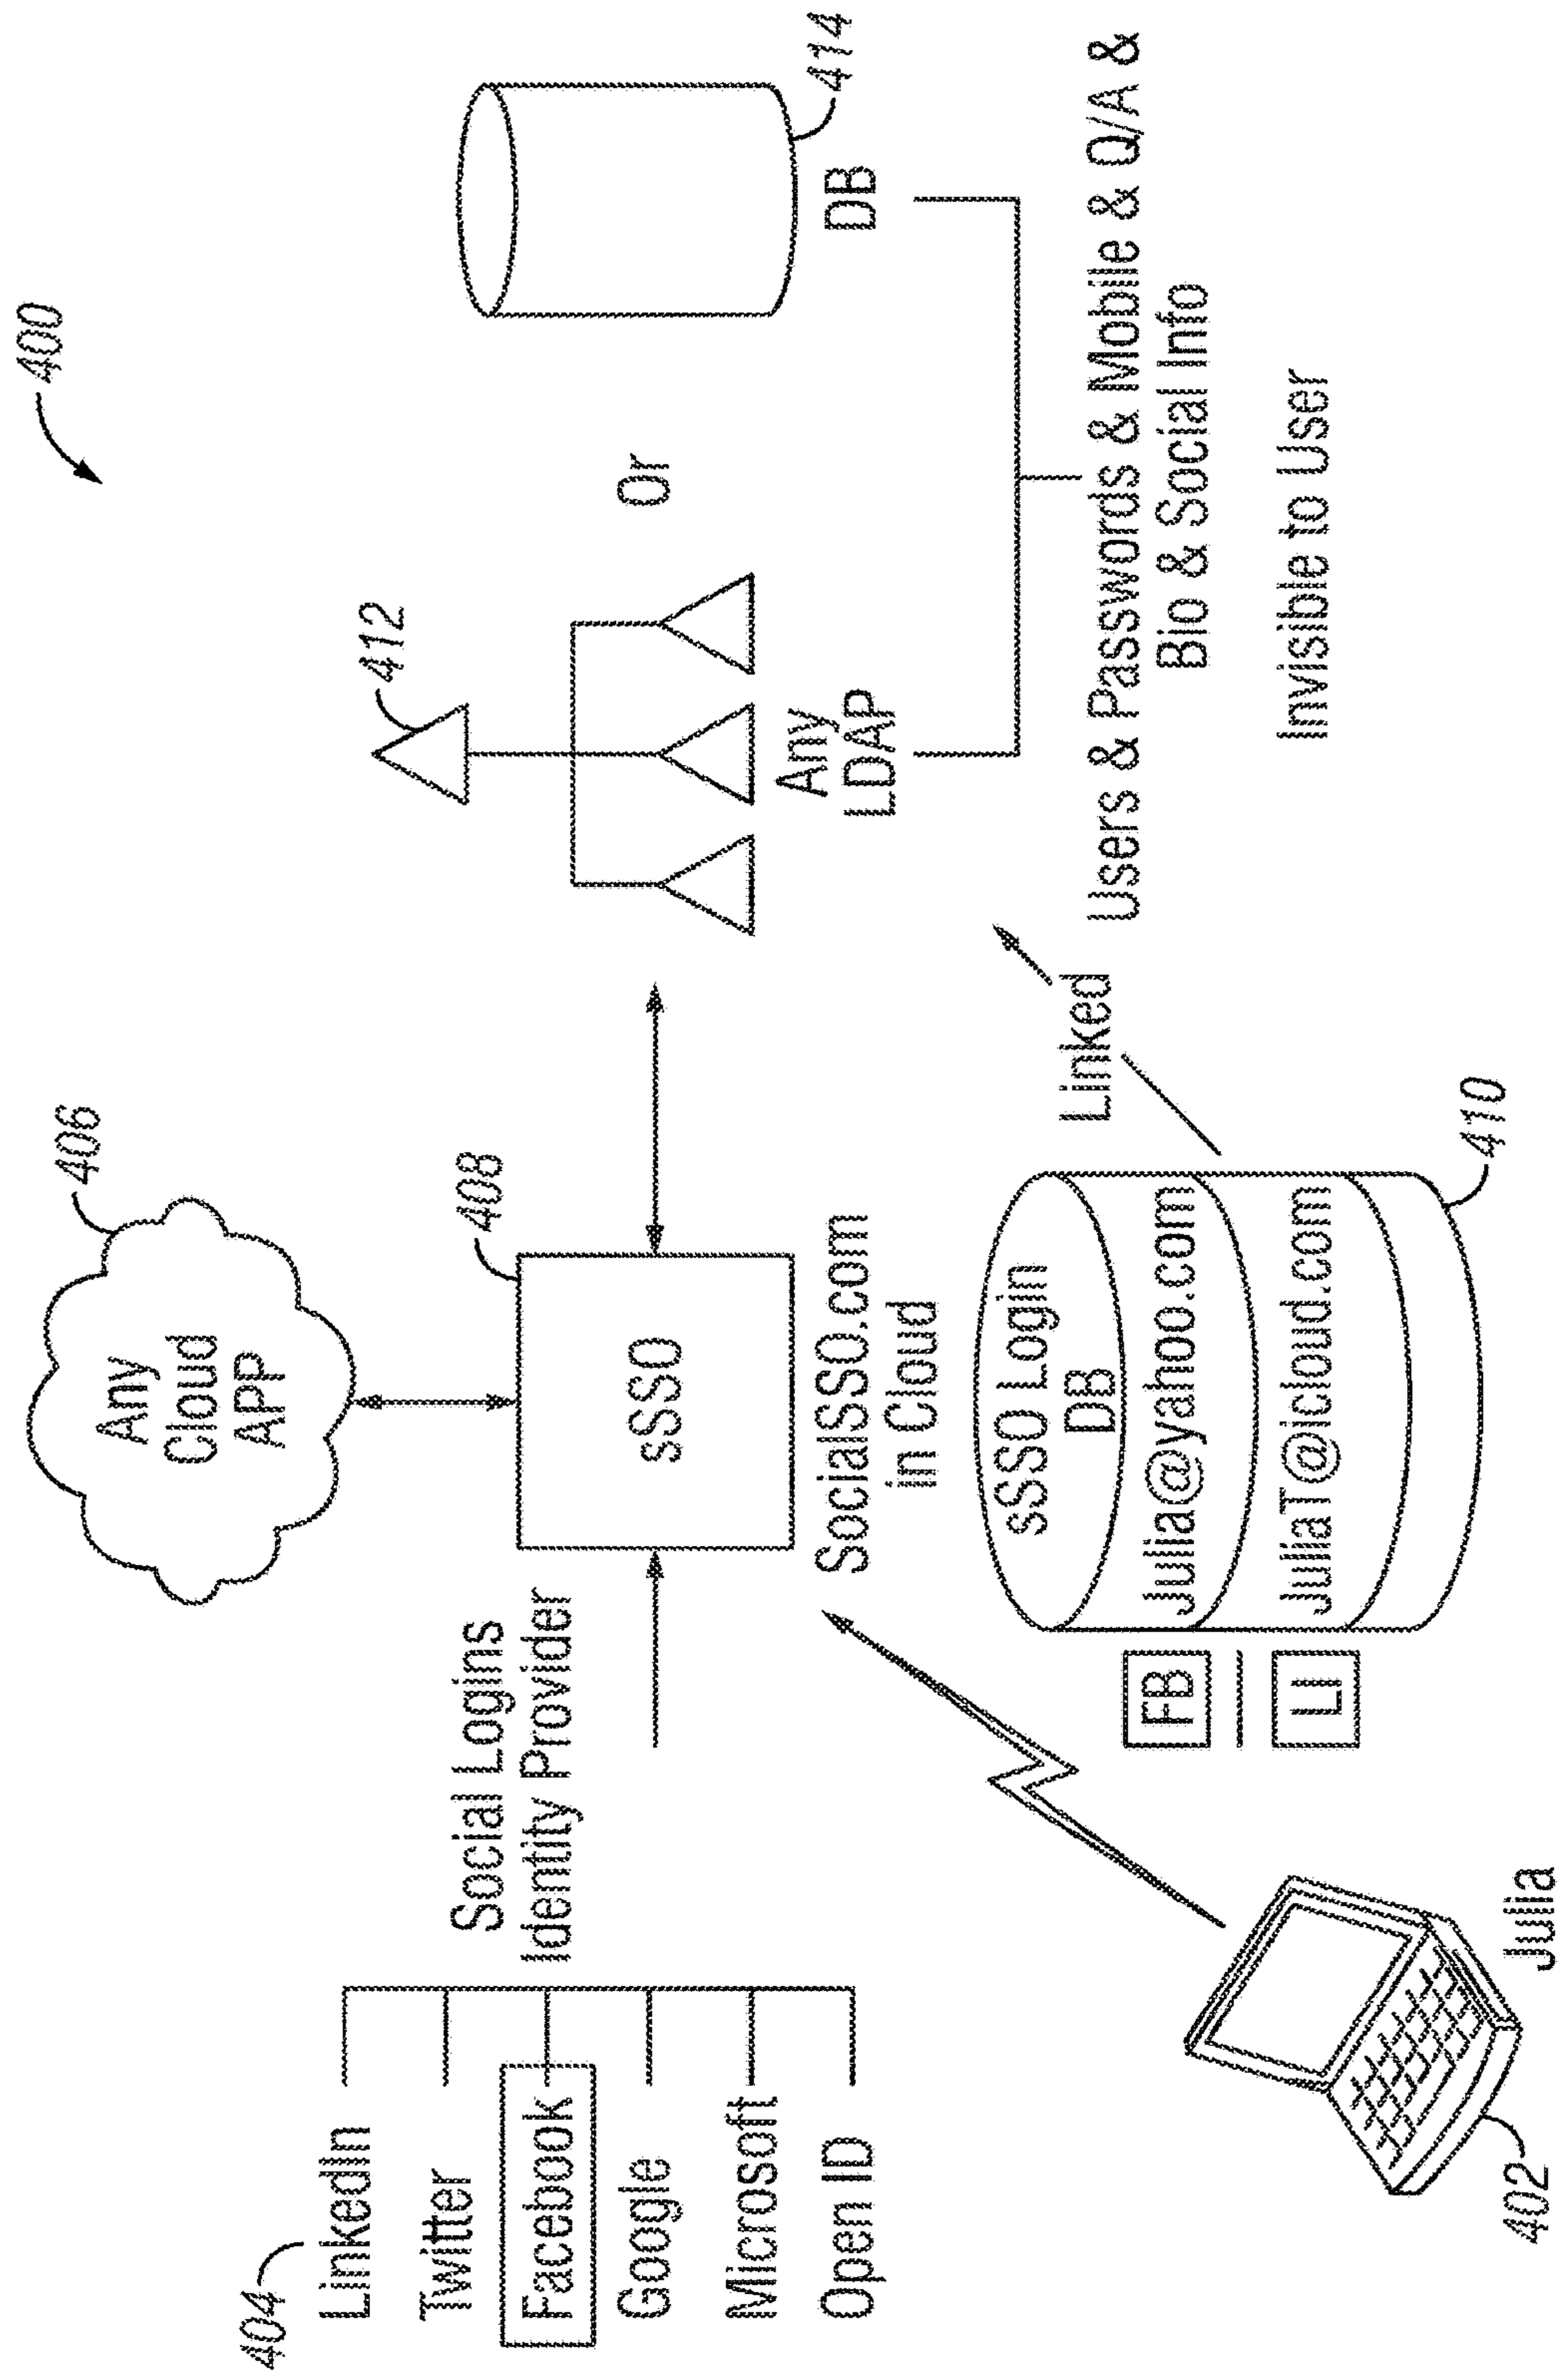


FIG. 4

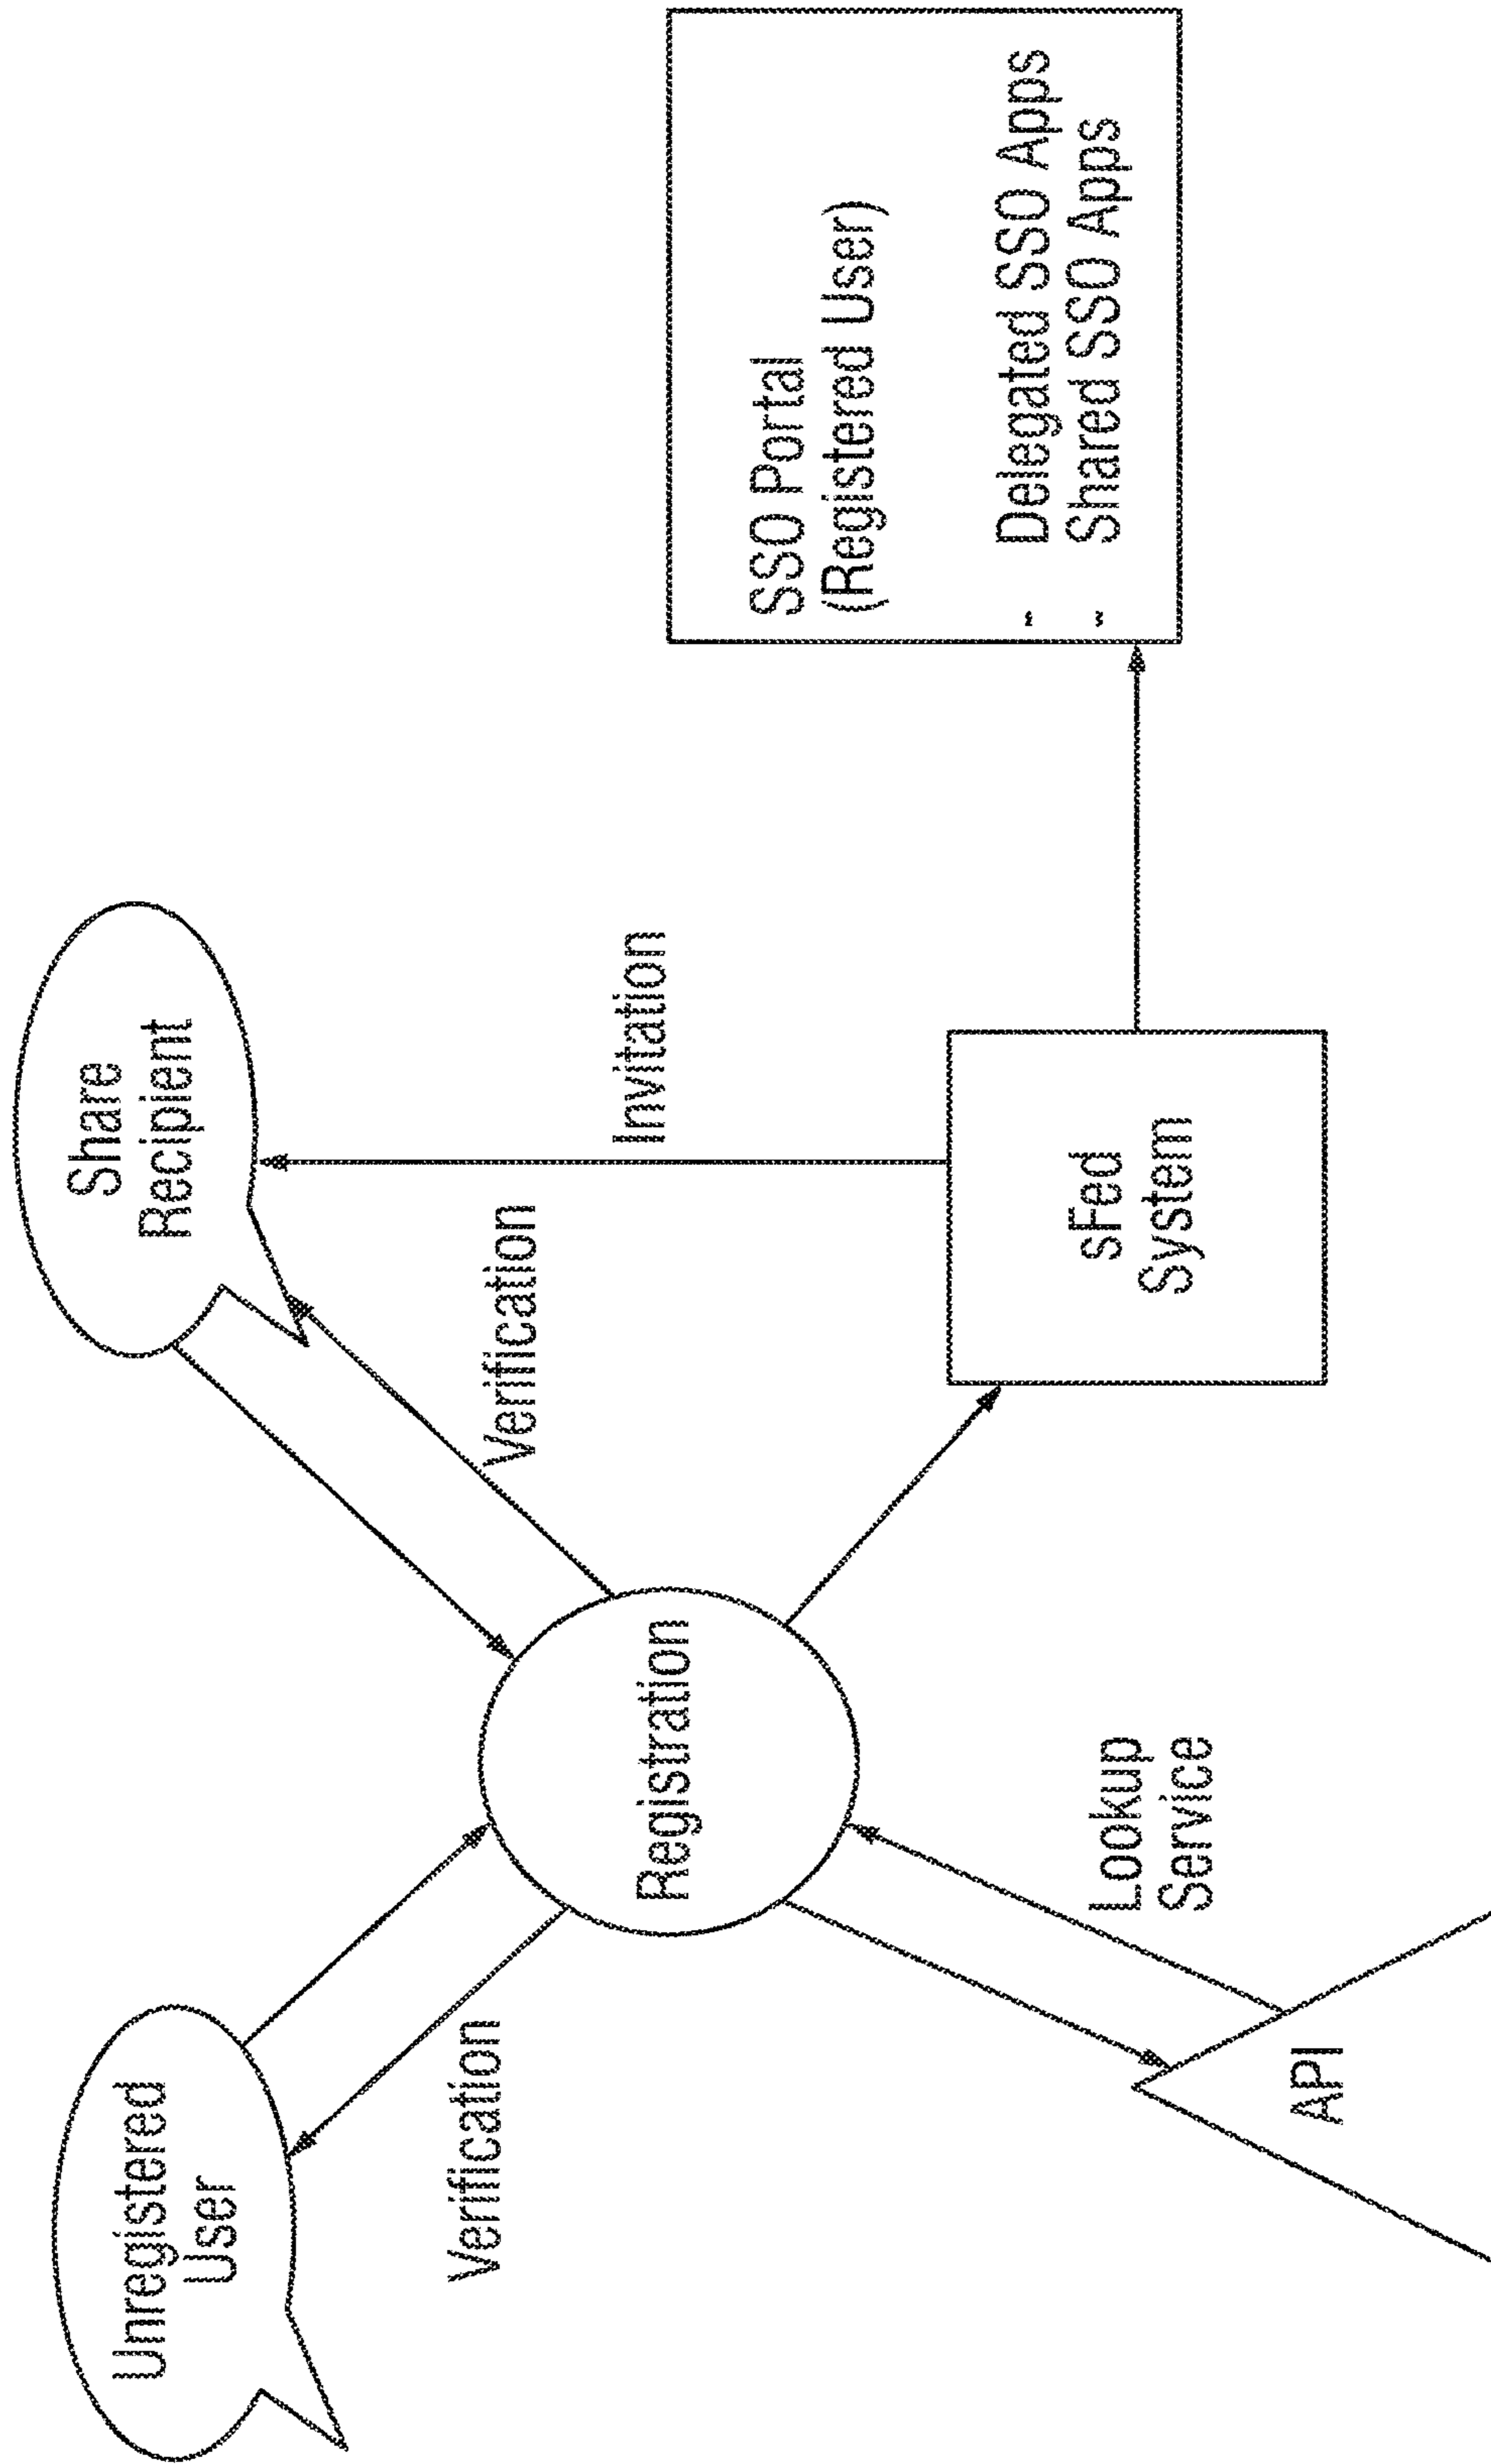


FIG. 5A



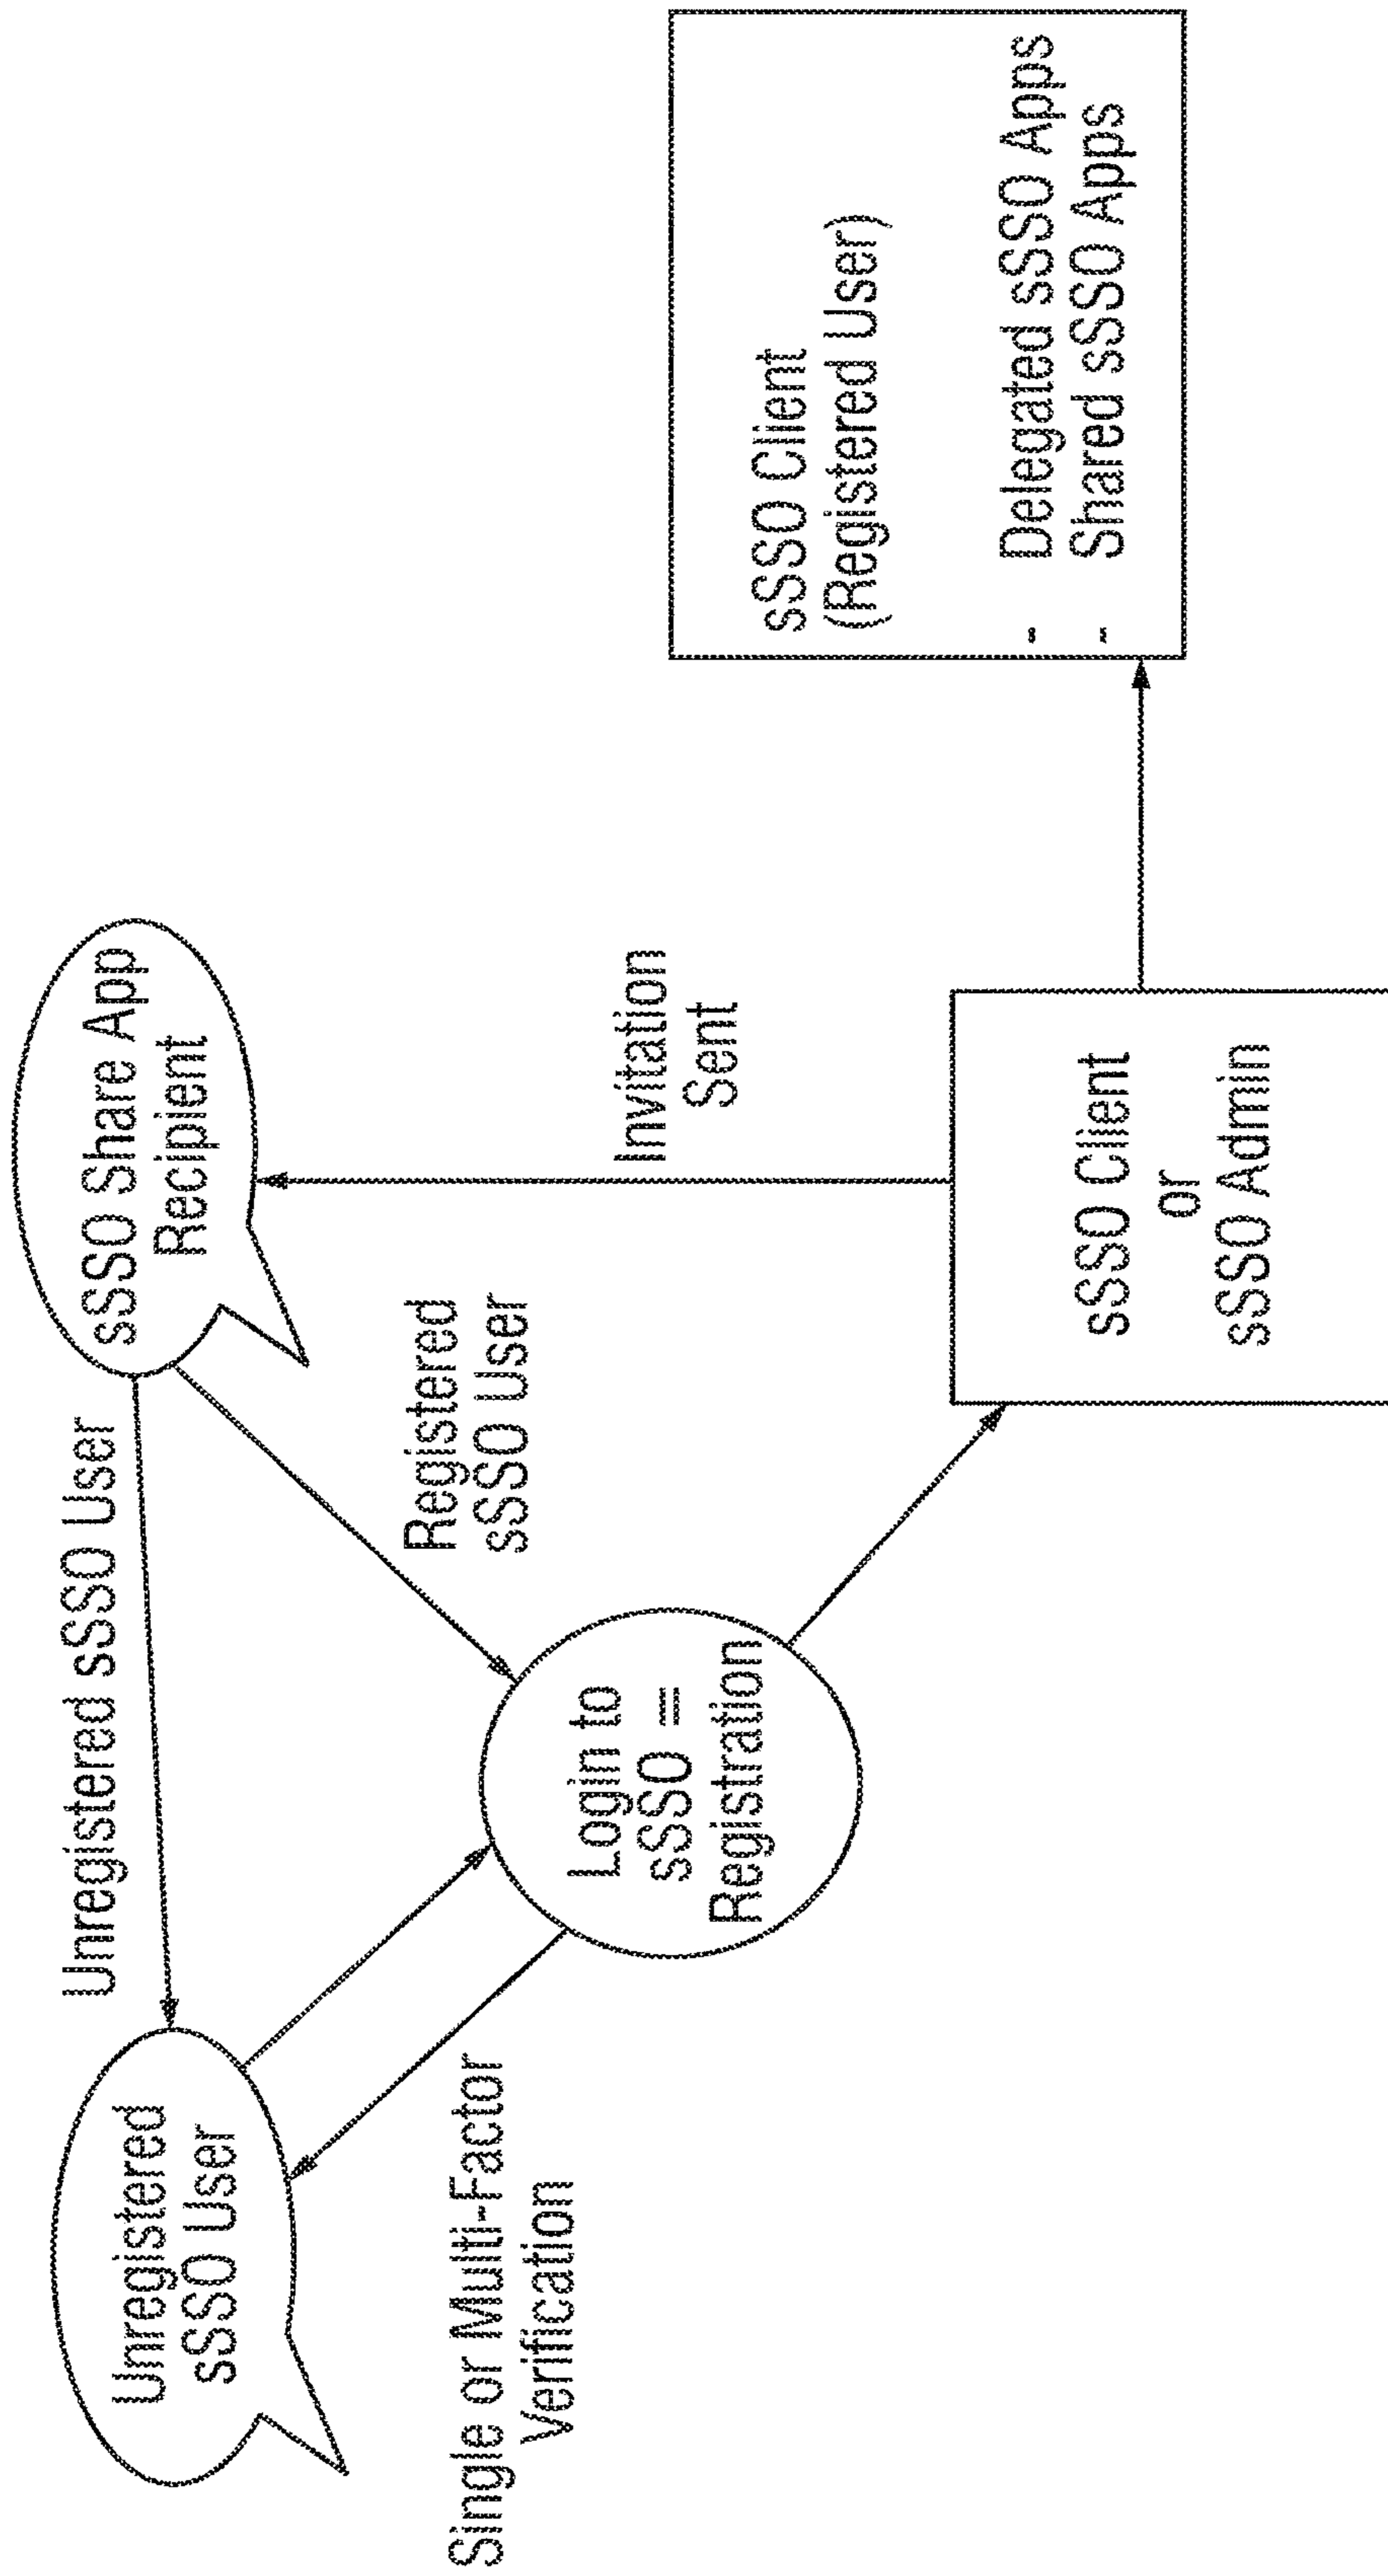


FIG. 5B

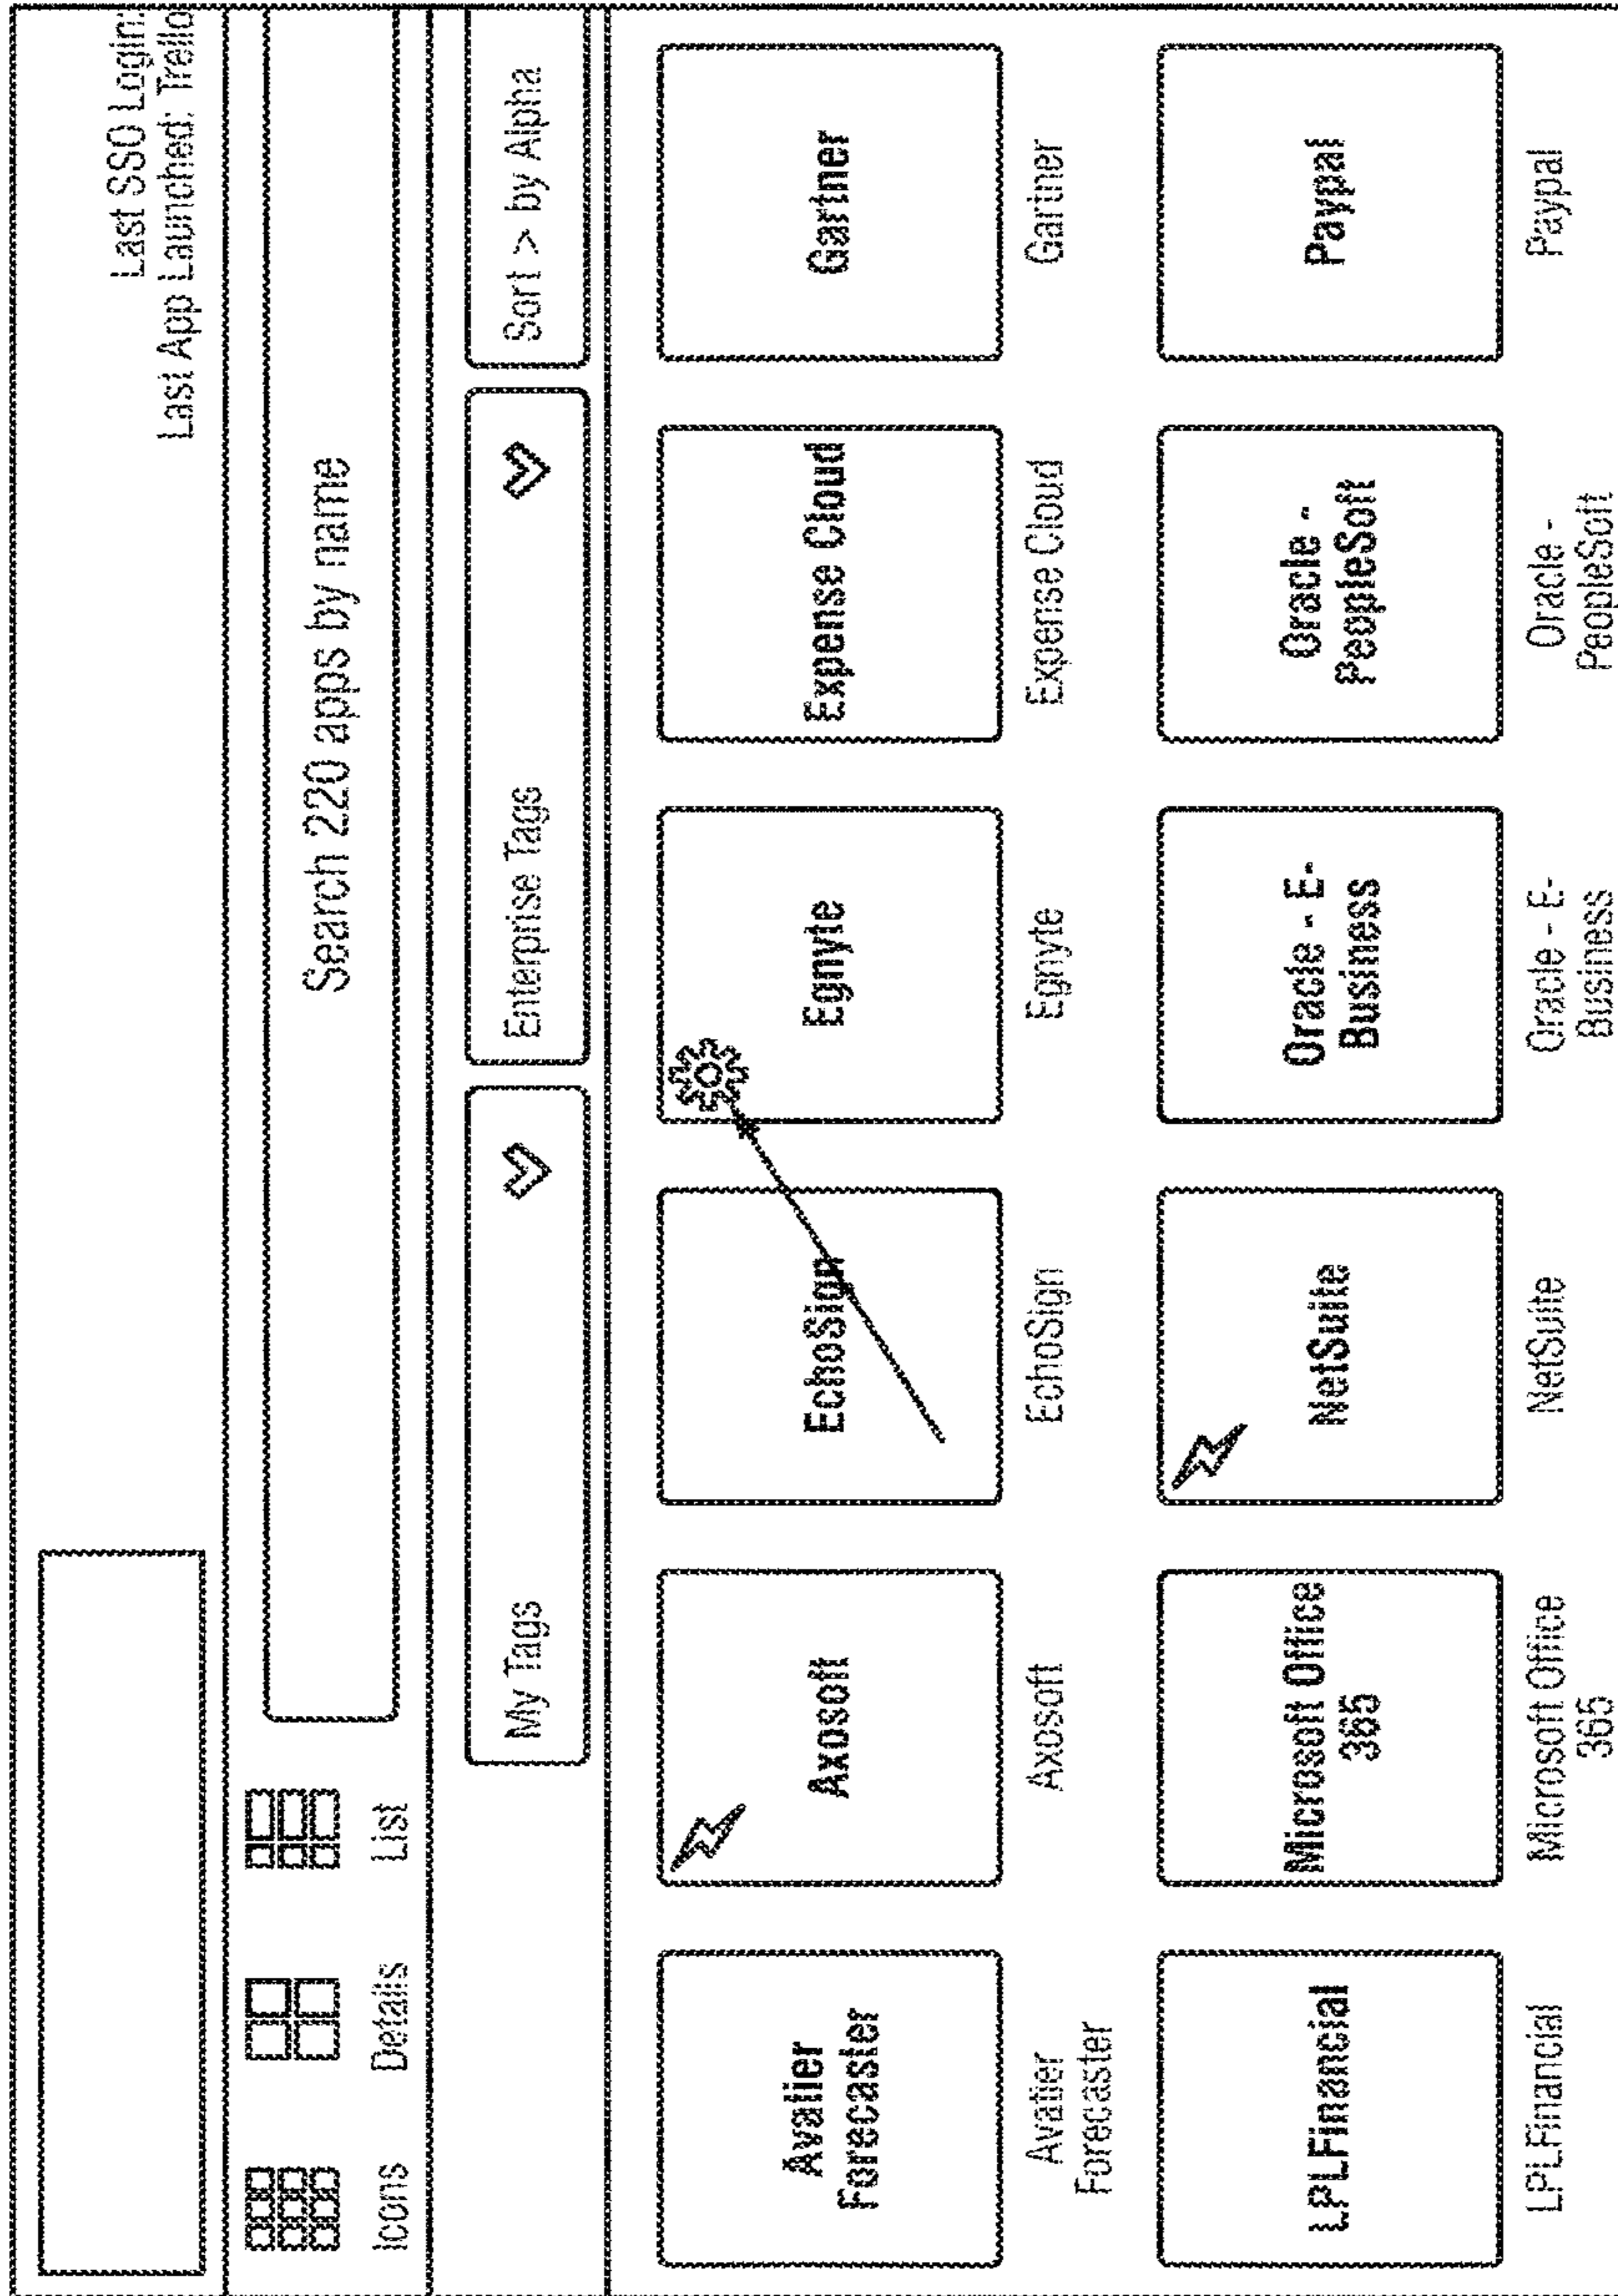


FIG. 6

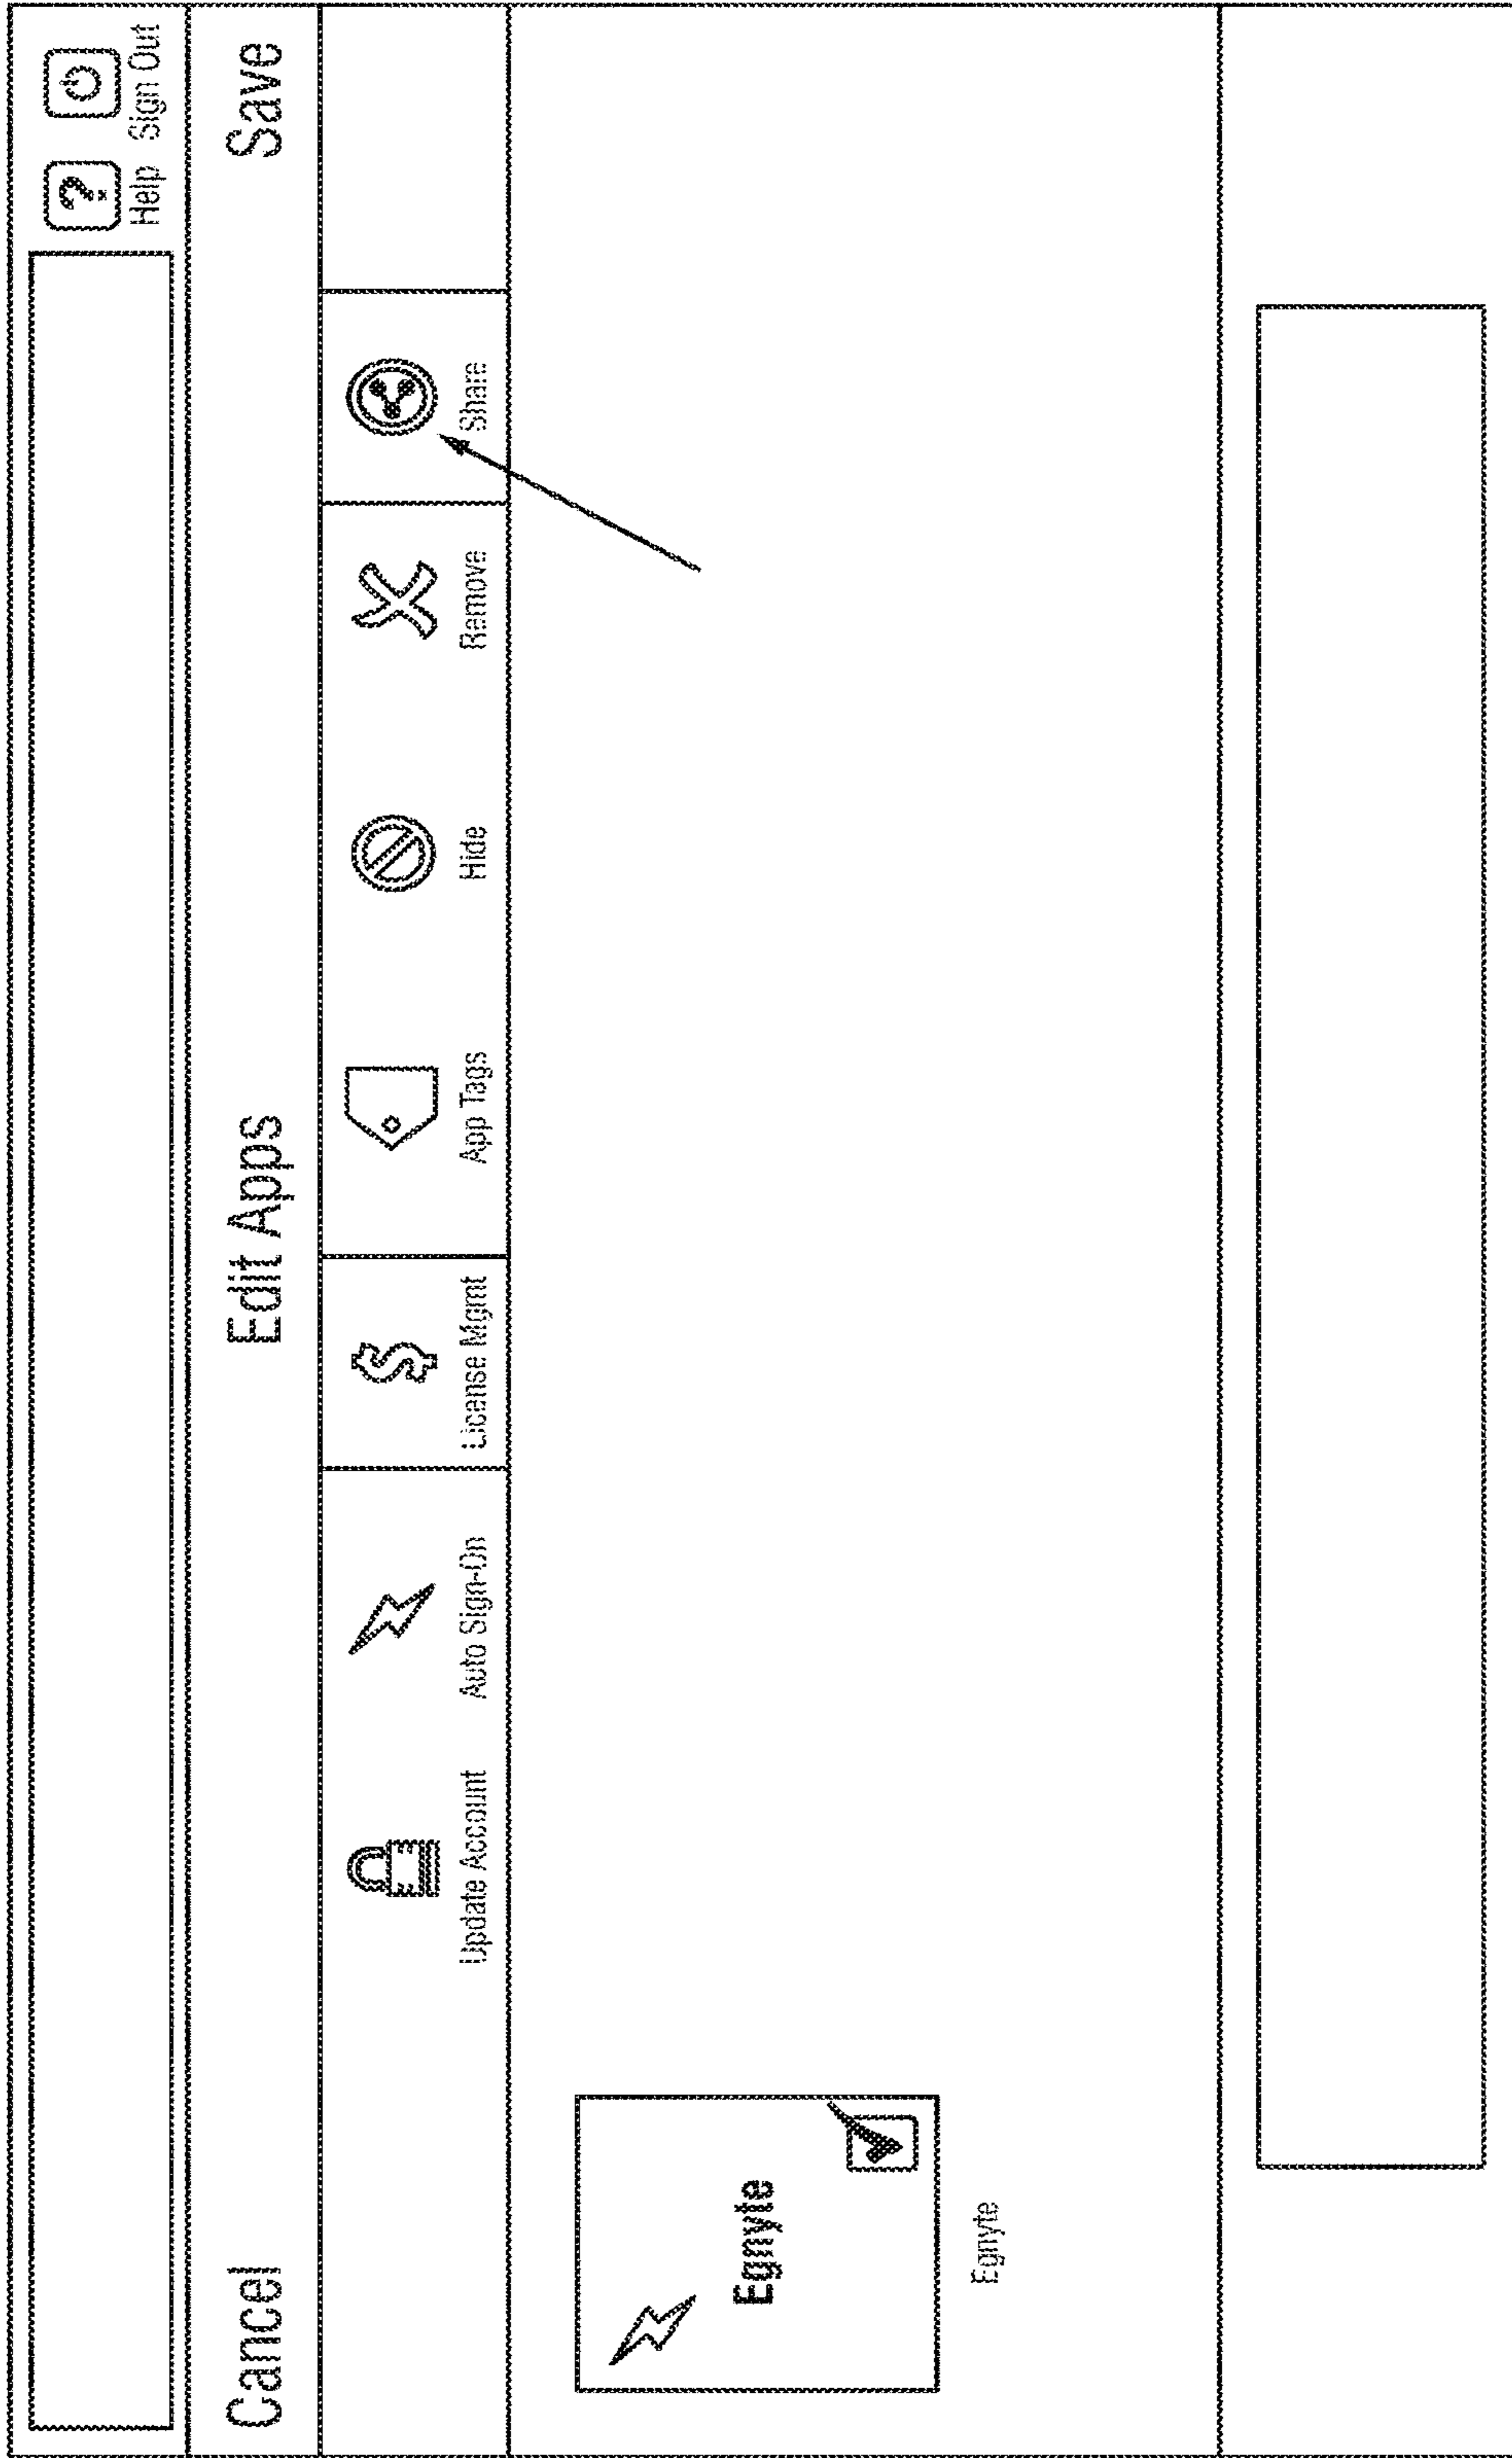


FIG. 7

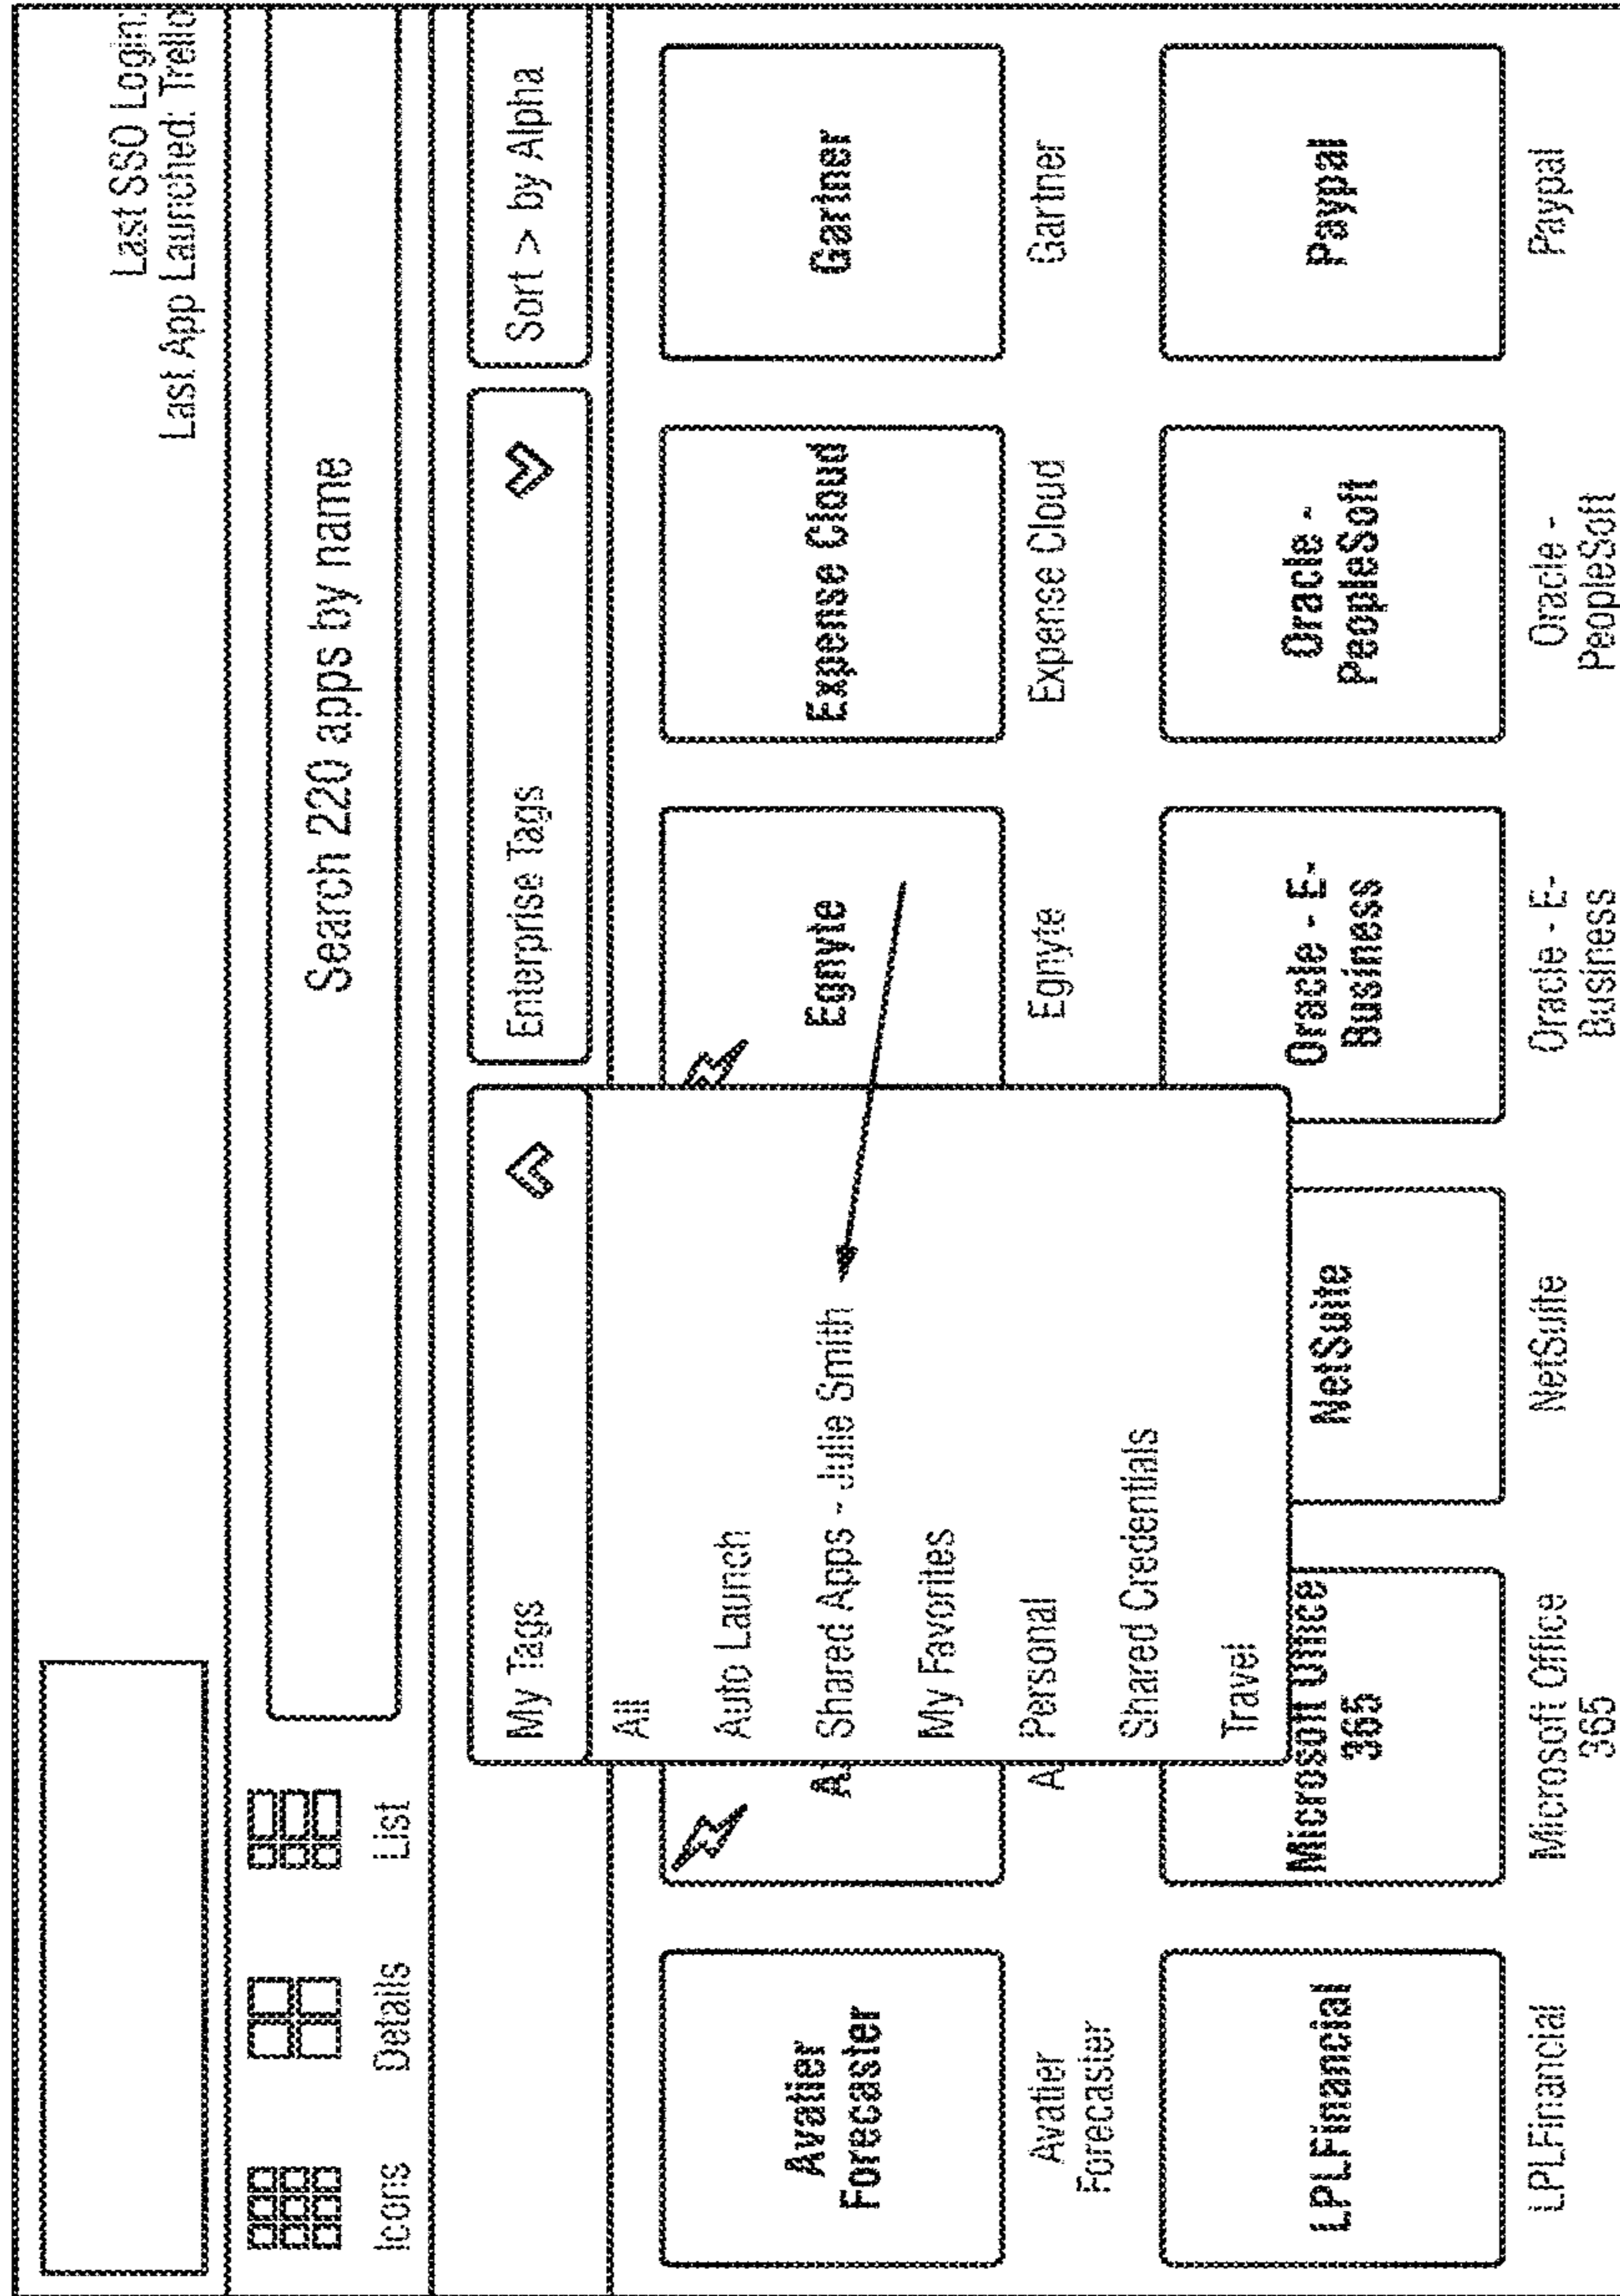


FIG. 8

Options

- Web Applications
- Delegation
- Multi-Factor Authentication
- Security
- Terms of Use
- Verification

Refresh

password checker

Single Sign-On

HR Feeds

Reports

Done

Delegation

Create New Delegation

Delegation Type: Social-Login:me

Provider Type: 1 Sign in with Facebook

Provider user name: julie@yahoo.com

Apply to these SSO Enterprise Connectors: (Enter search filter)

Apply Filter

Clear Filter

Create

Page size: 200

Web Application

Web Application	Updated On
<input checked="" type="checkbox"/> Go Daddy Go Daddy Register Domain Names <a href="https://sso.godaddy.com/login.aspx?skype=GDMVA4+-1301171">https://sso.godaddy.com/login.aspx?skype=GDMVA4+-1301171</a>	Jan 21 11:52 AM
<input type="checkbox"/> Facebook Facebook The Social Network <a href="https://www.facebook.com/">https://www.facebook.com/</a>	Jan 27 11:07 AM

FIG. 9

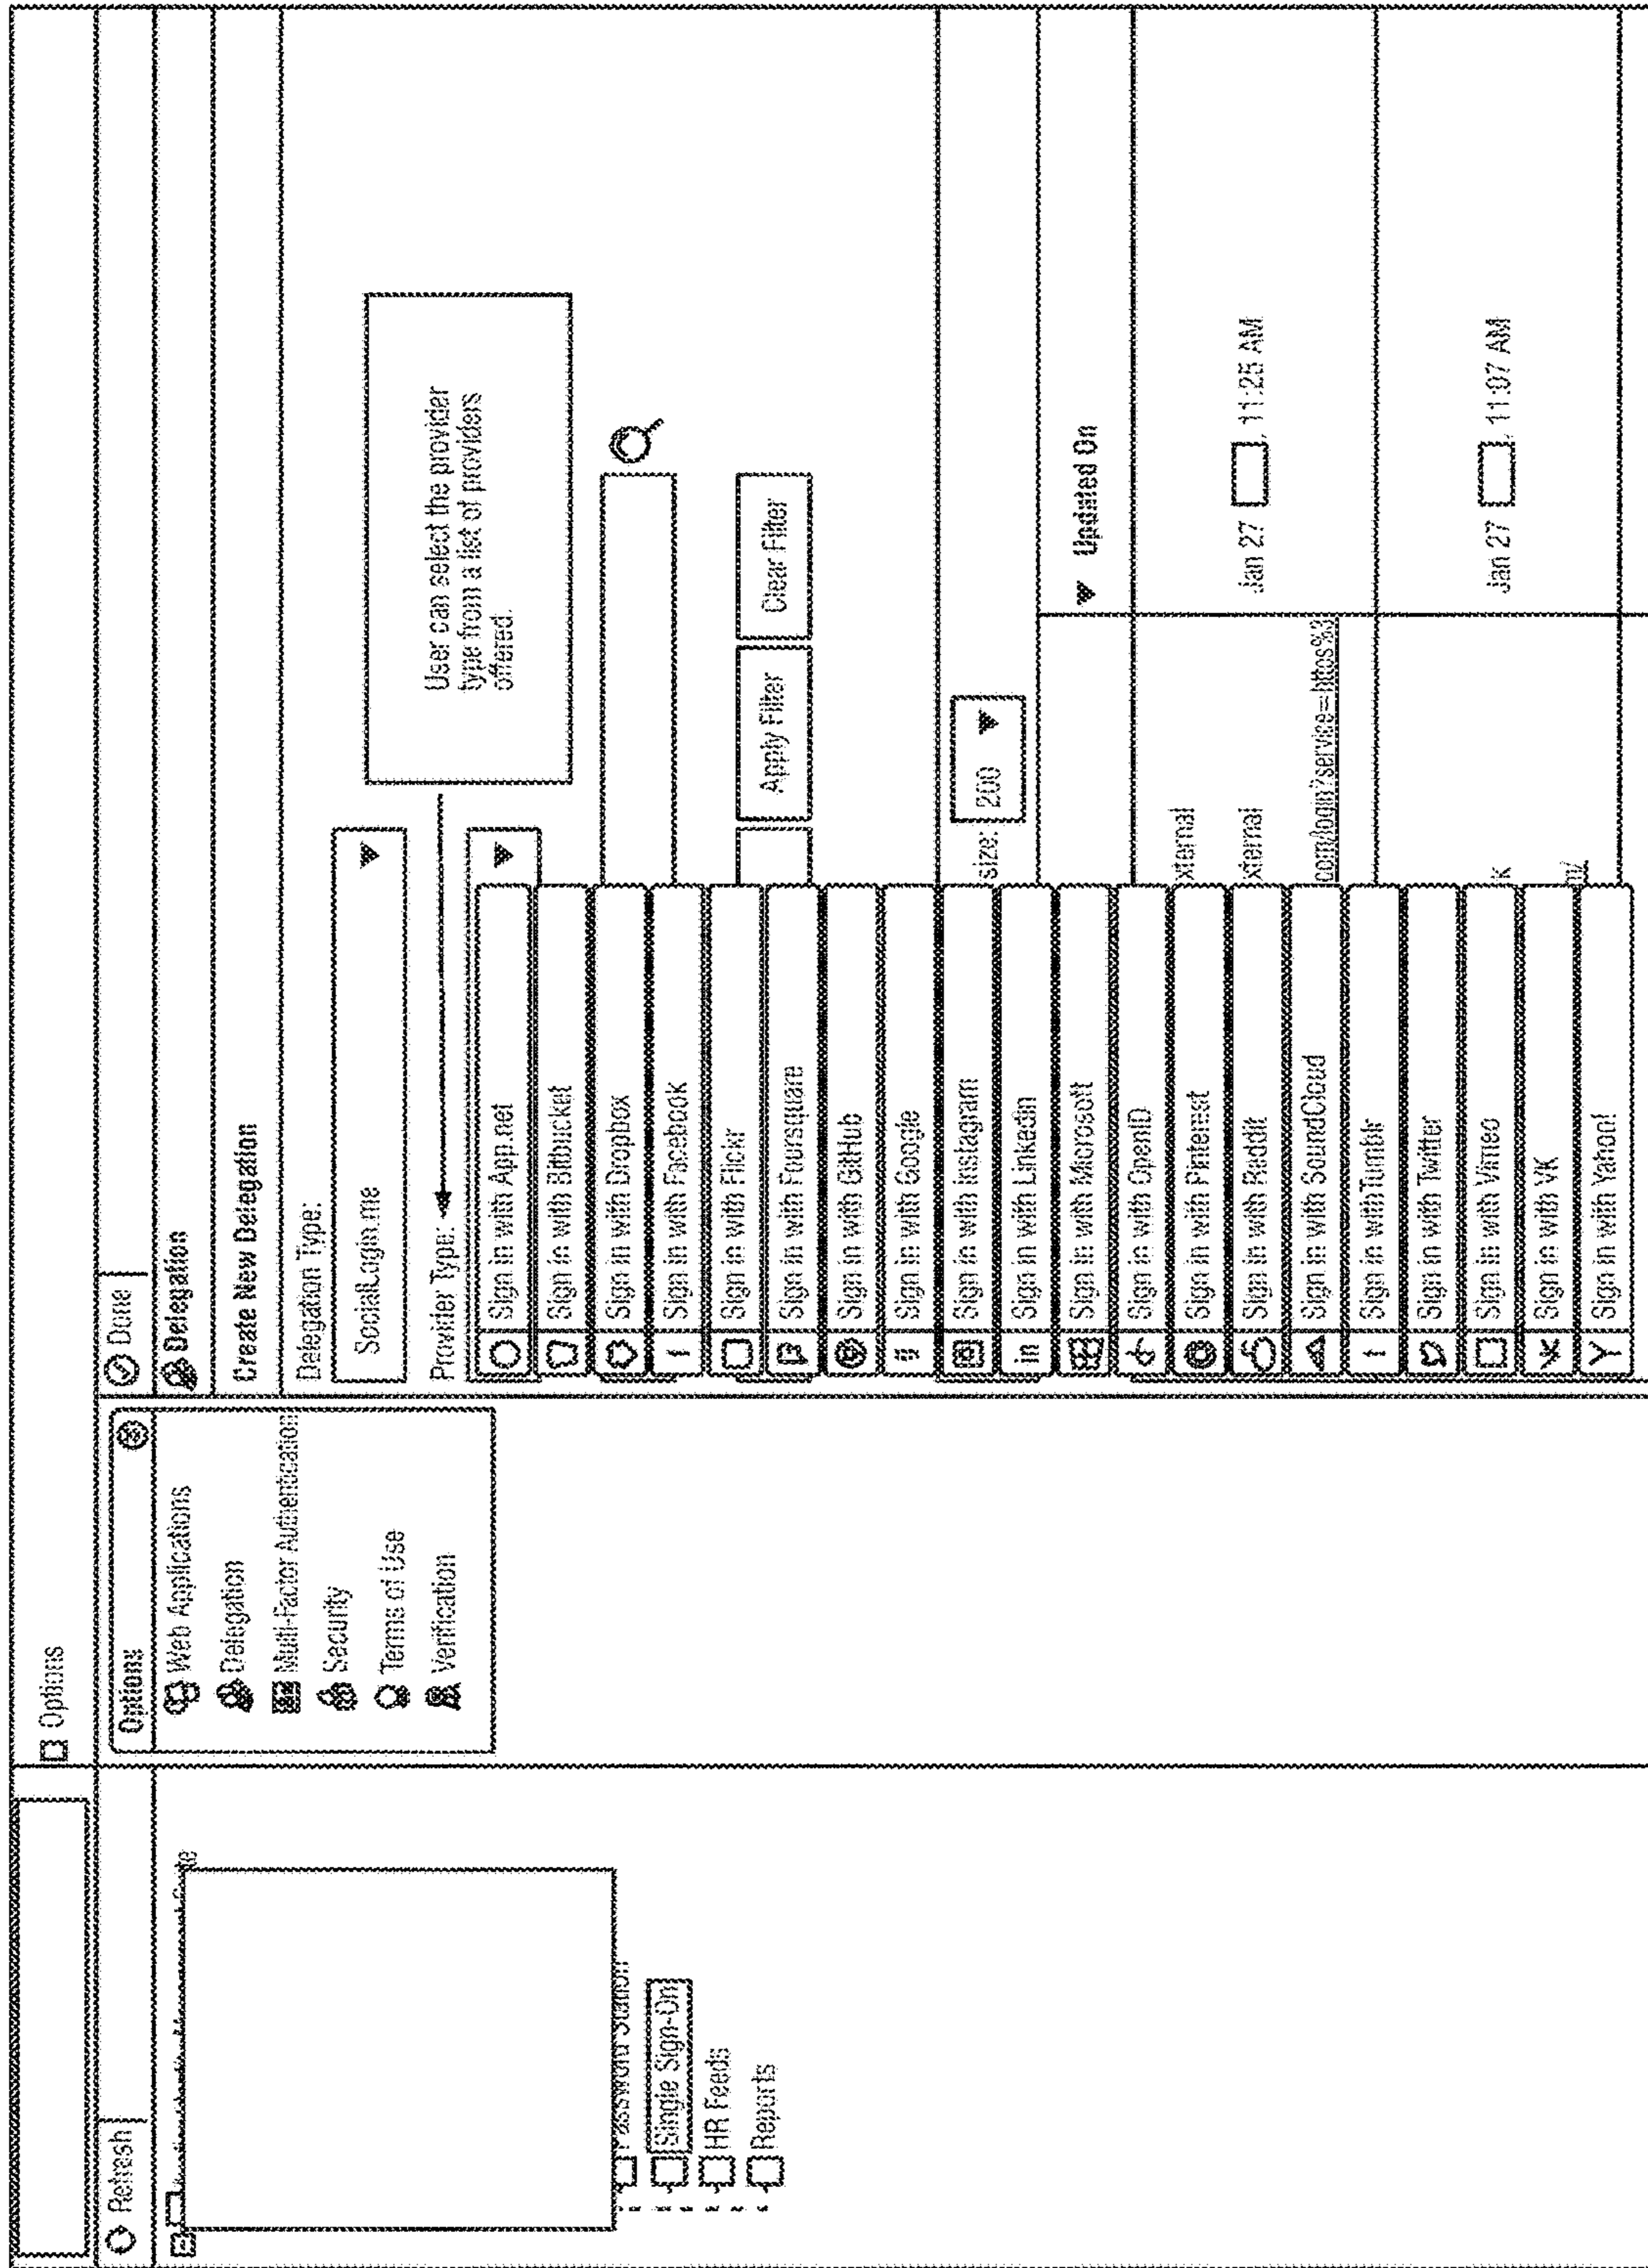


FIG. 10

Welcome  
One-click web logins.

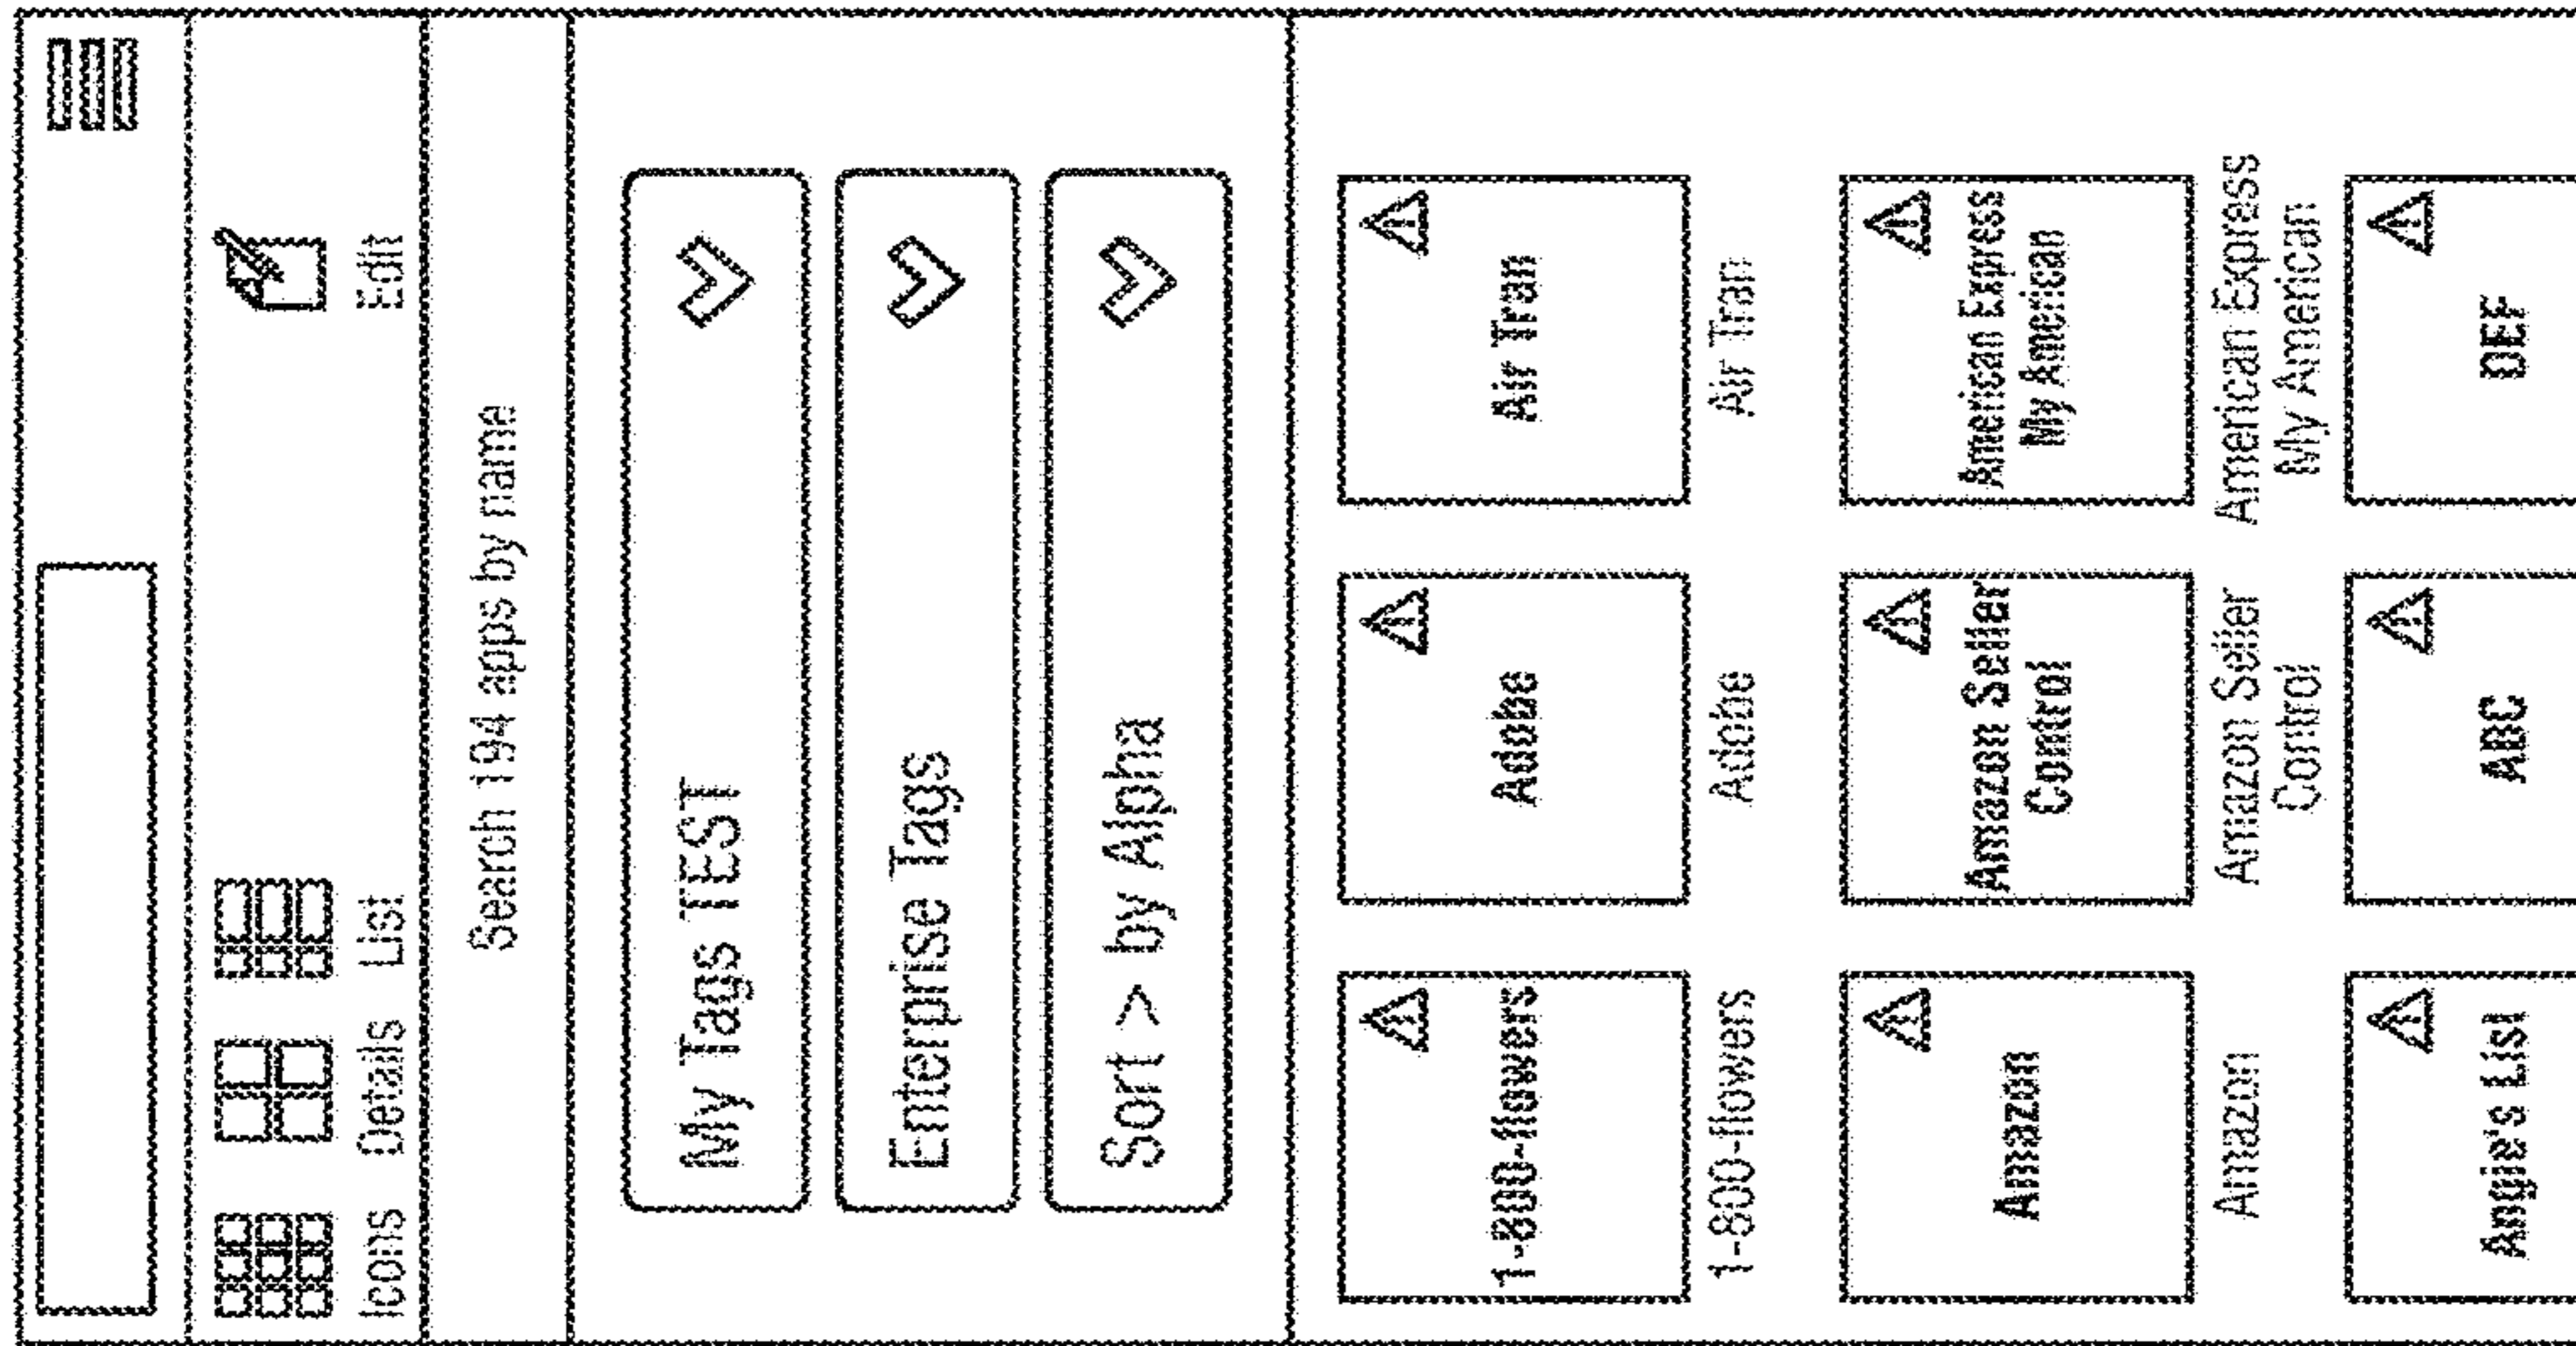


FIG. 11

Add  
Add your applications.

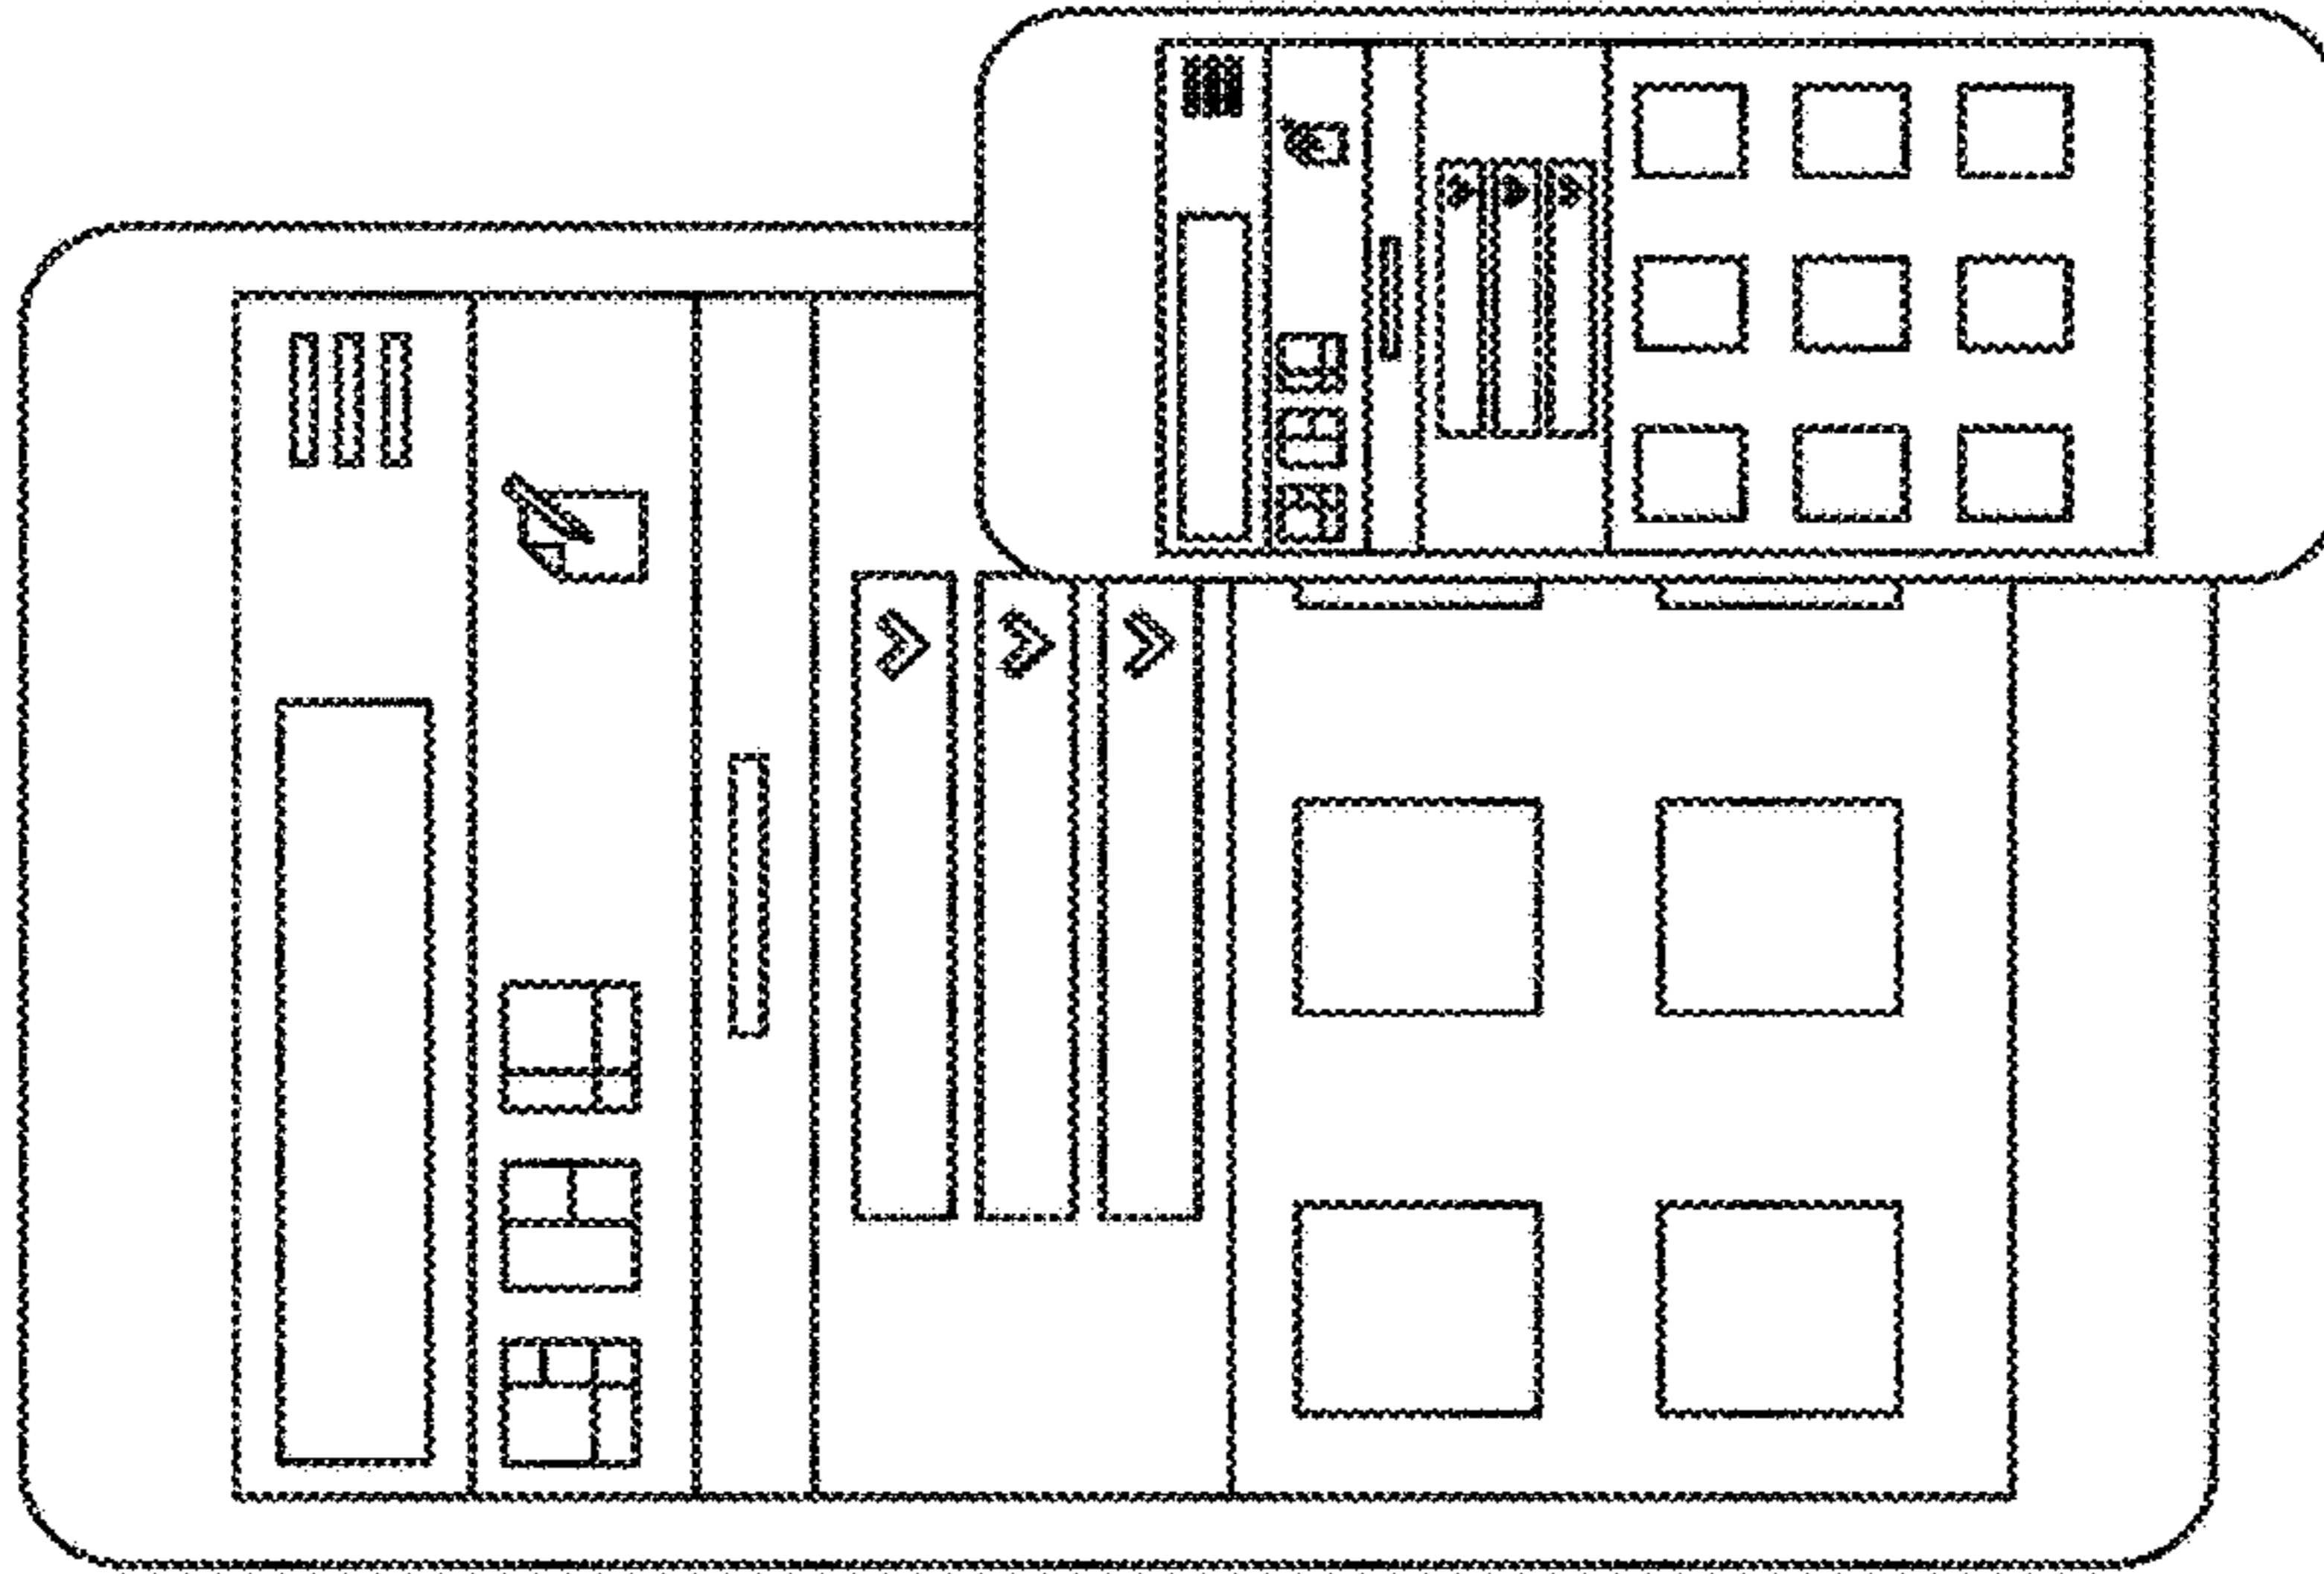


FIG. 12

### Configure

Setup your application.

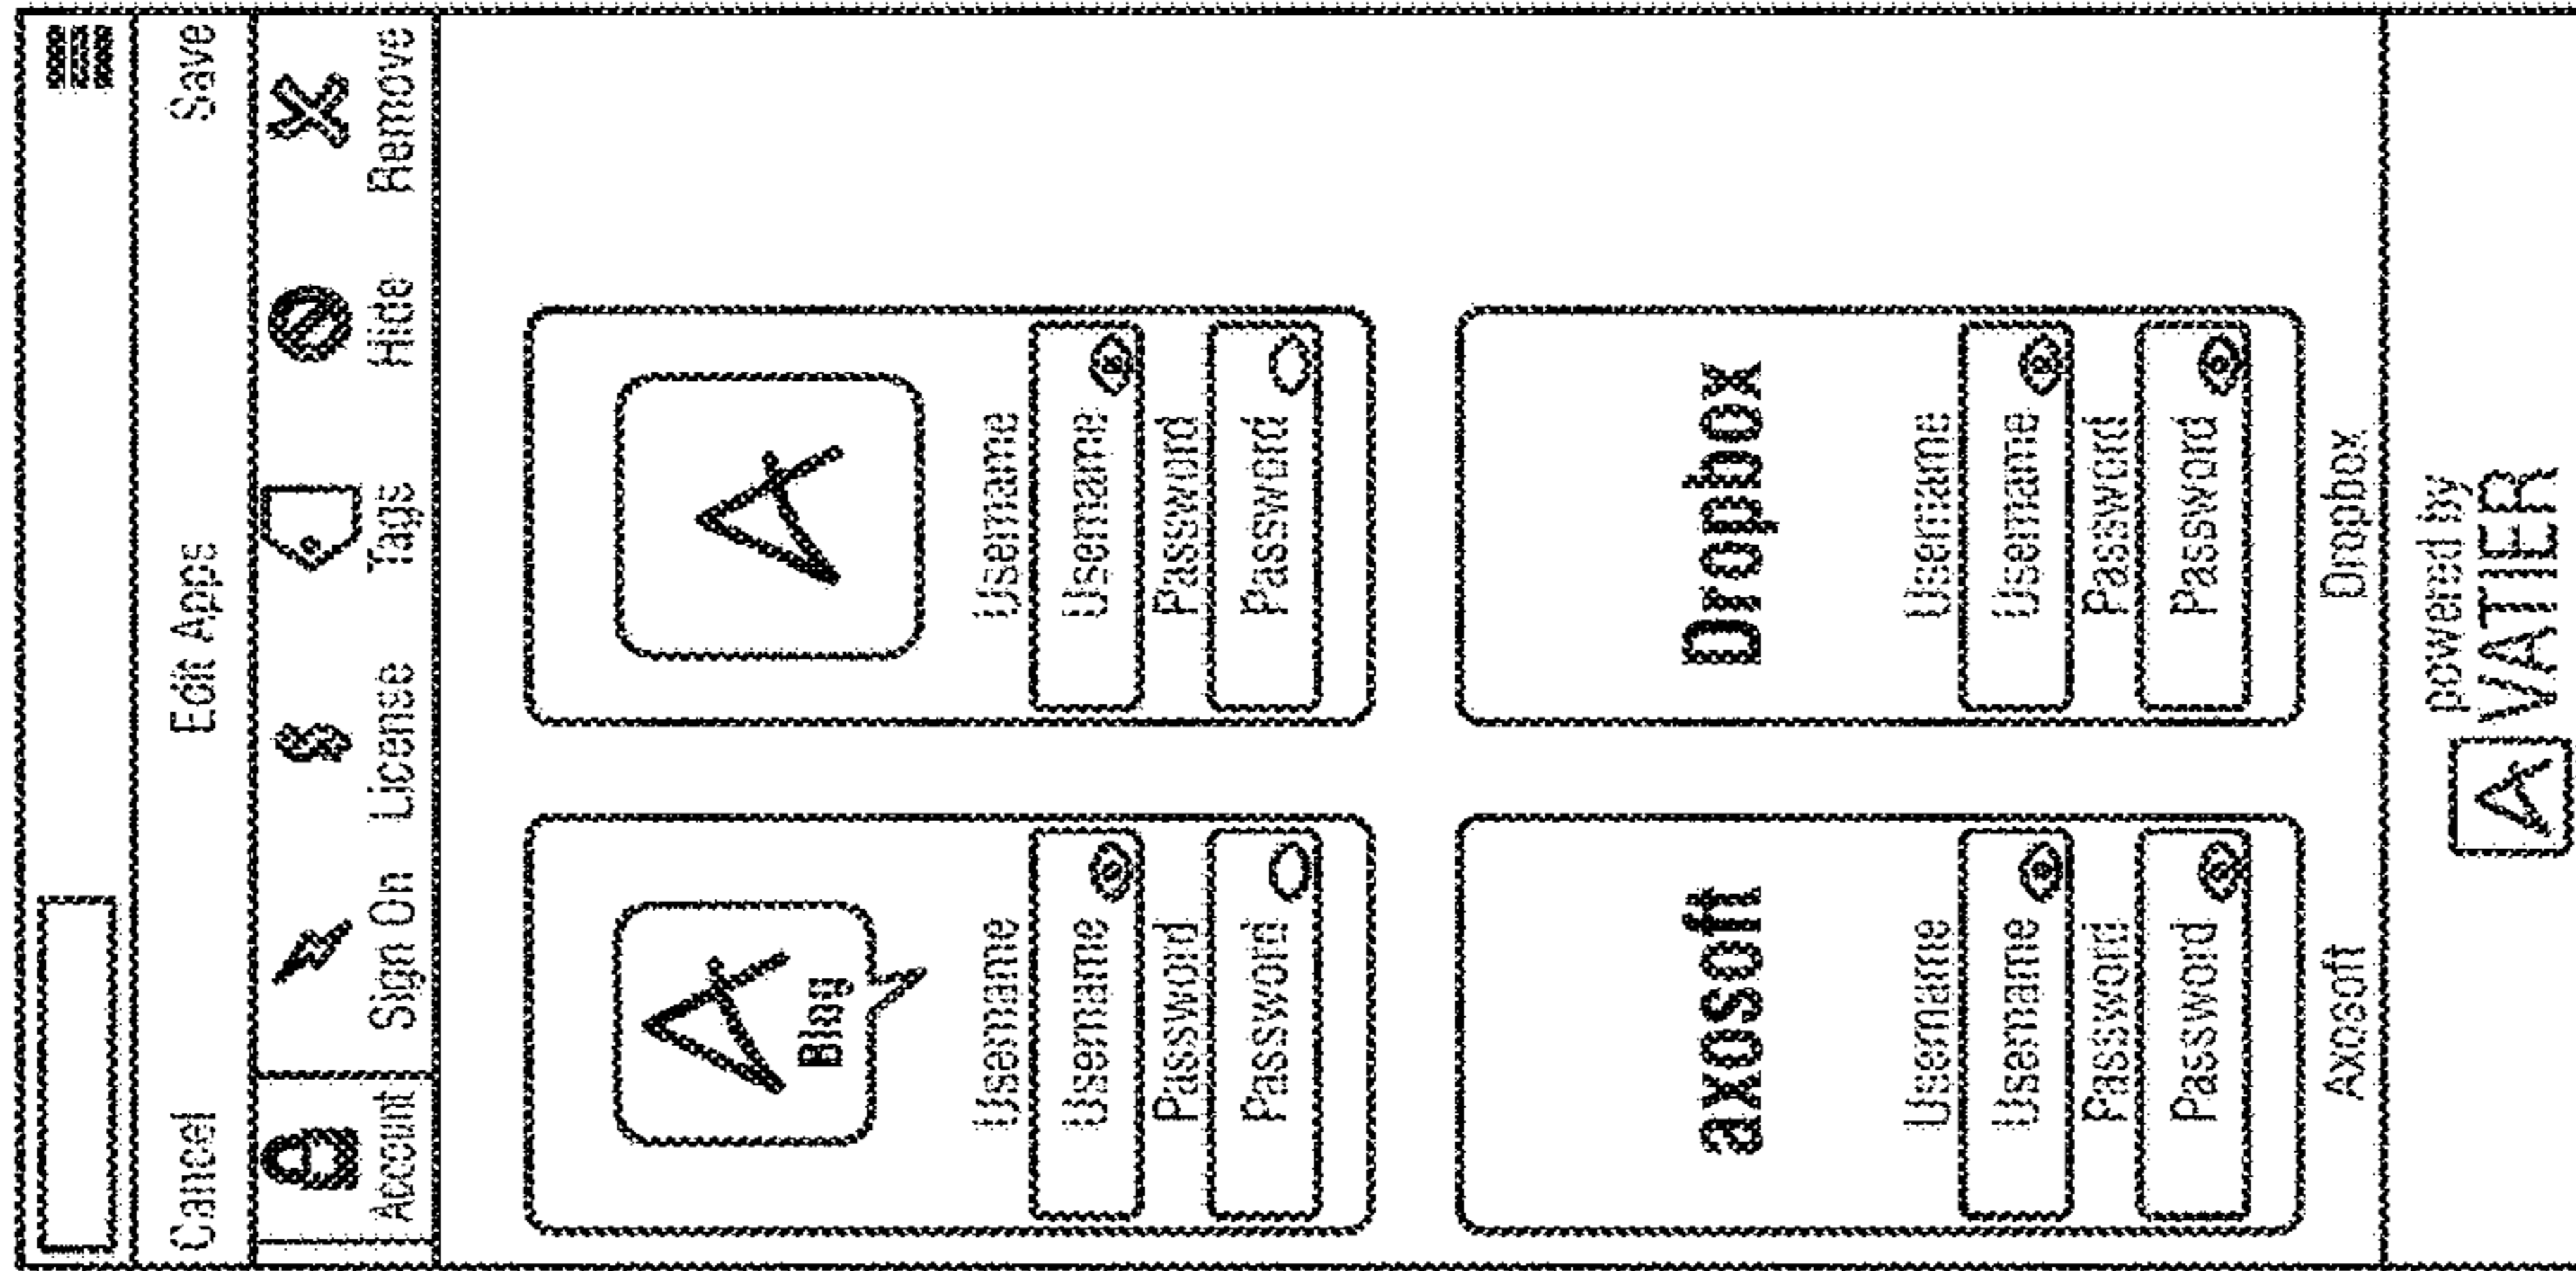


FIG. 13

### Connect

One-click to launch.

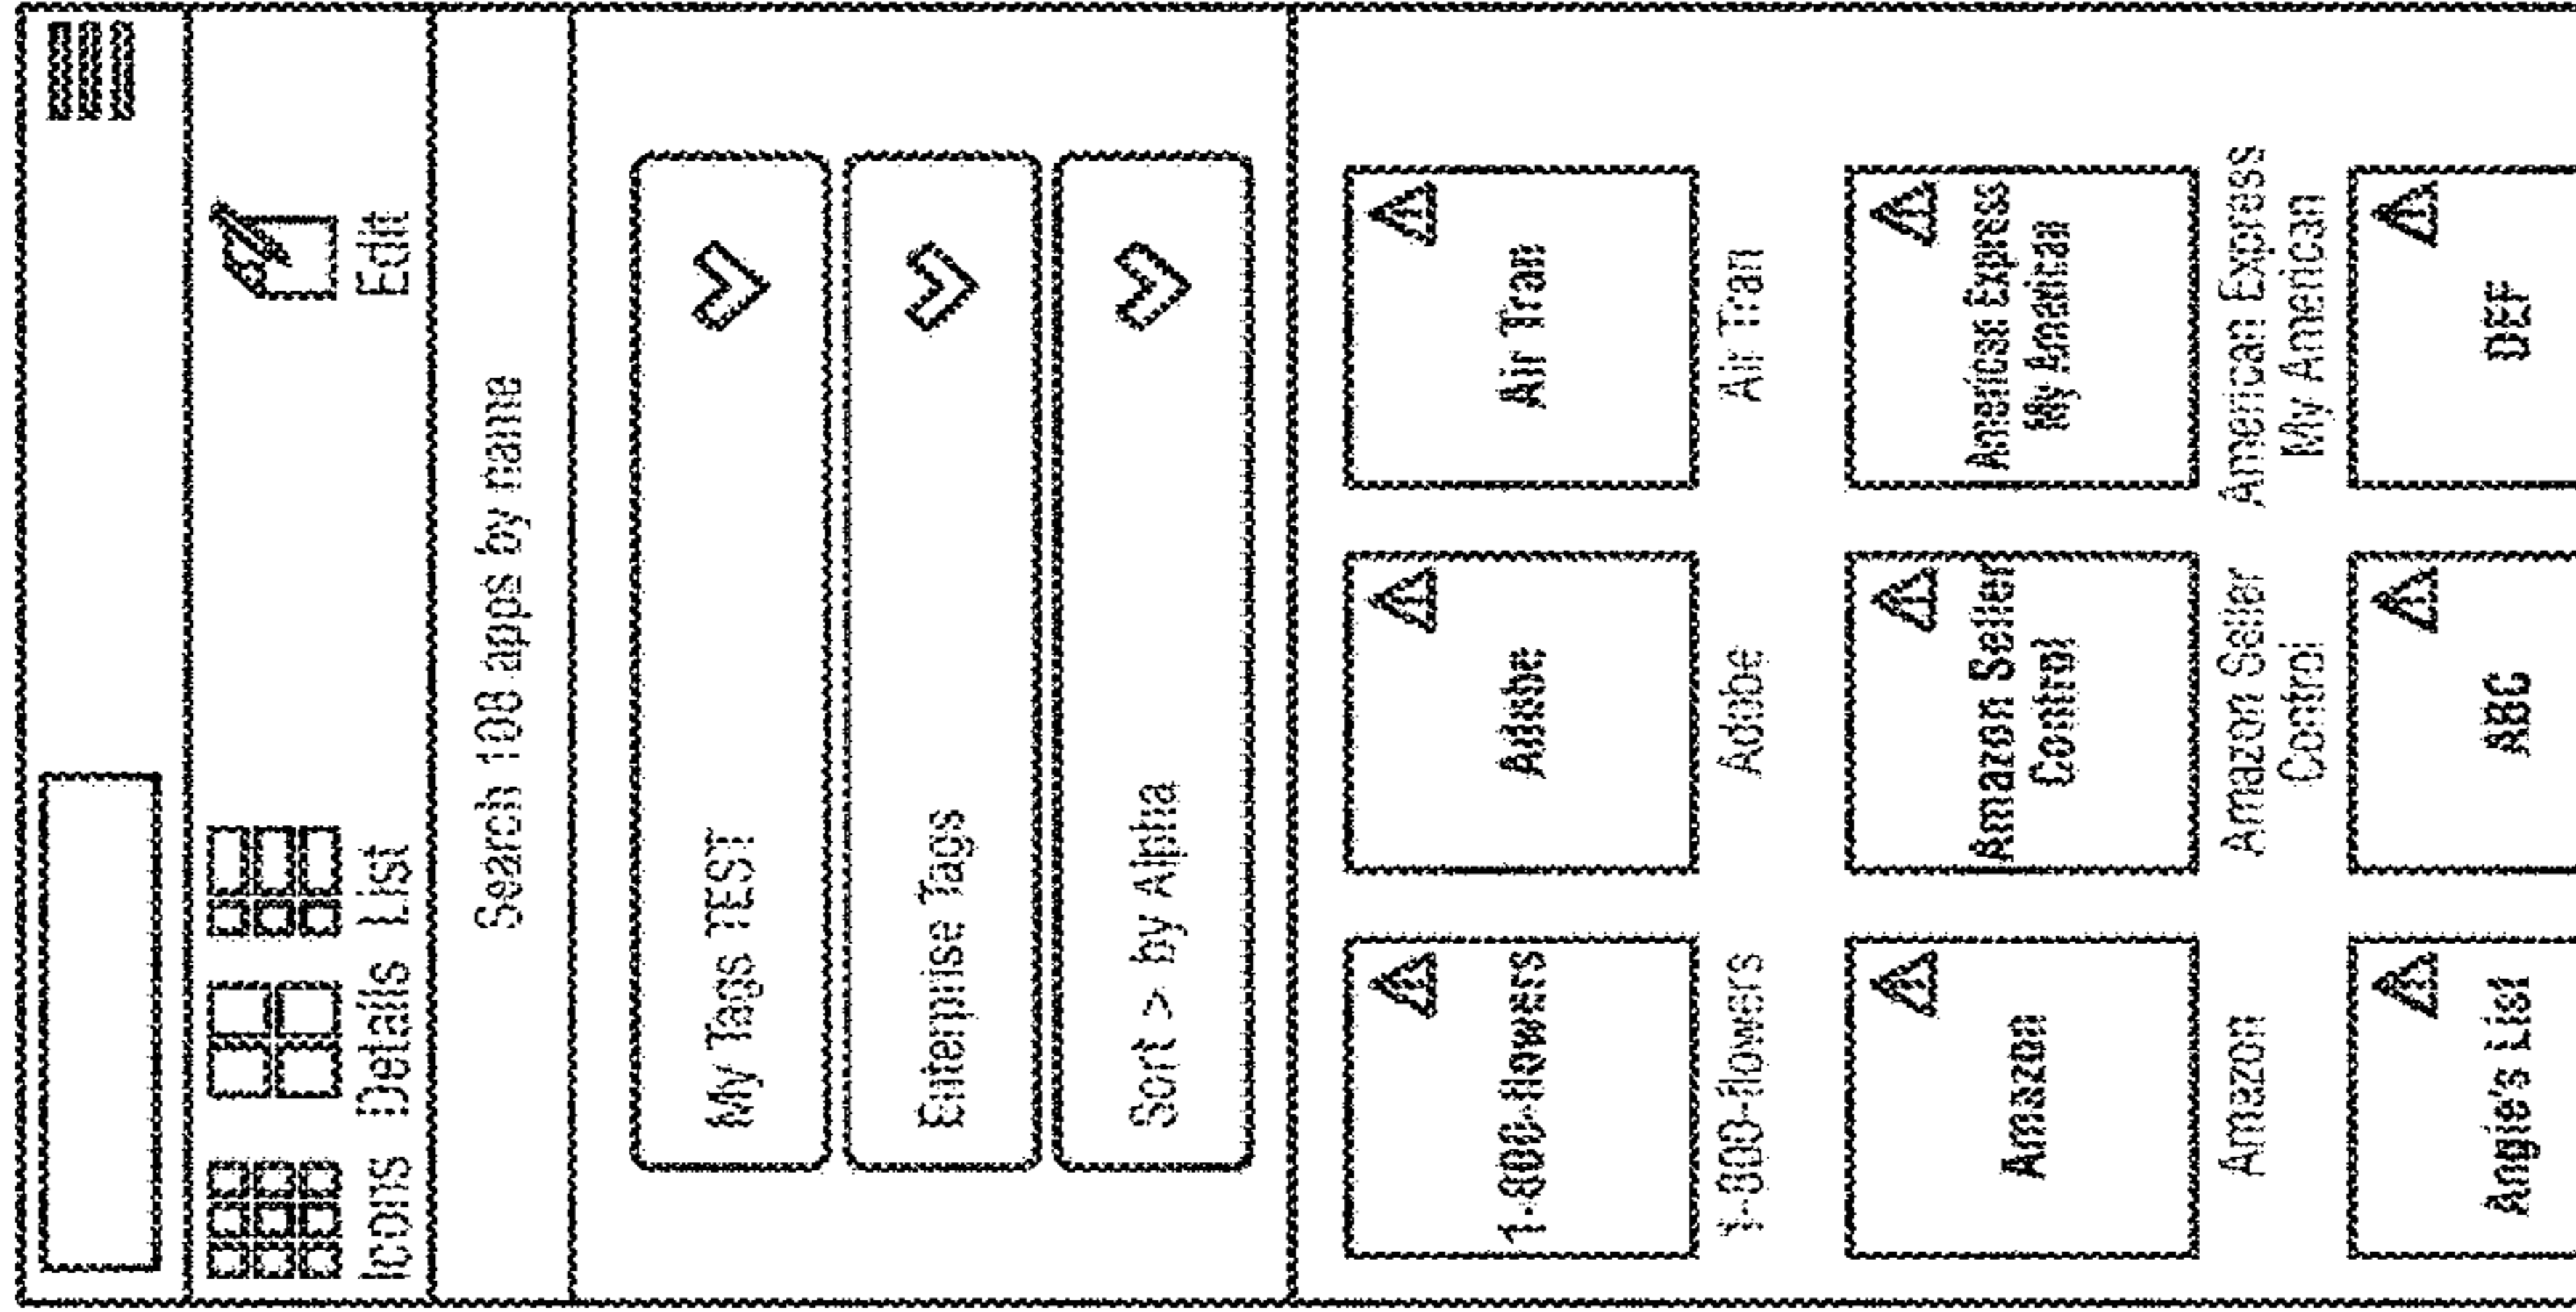


FIG. 14



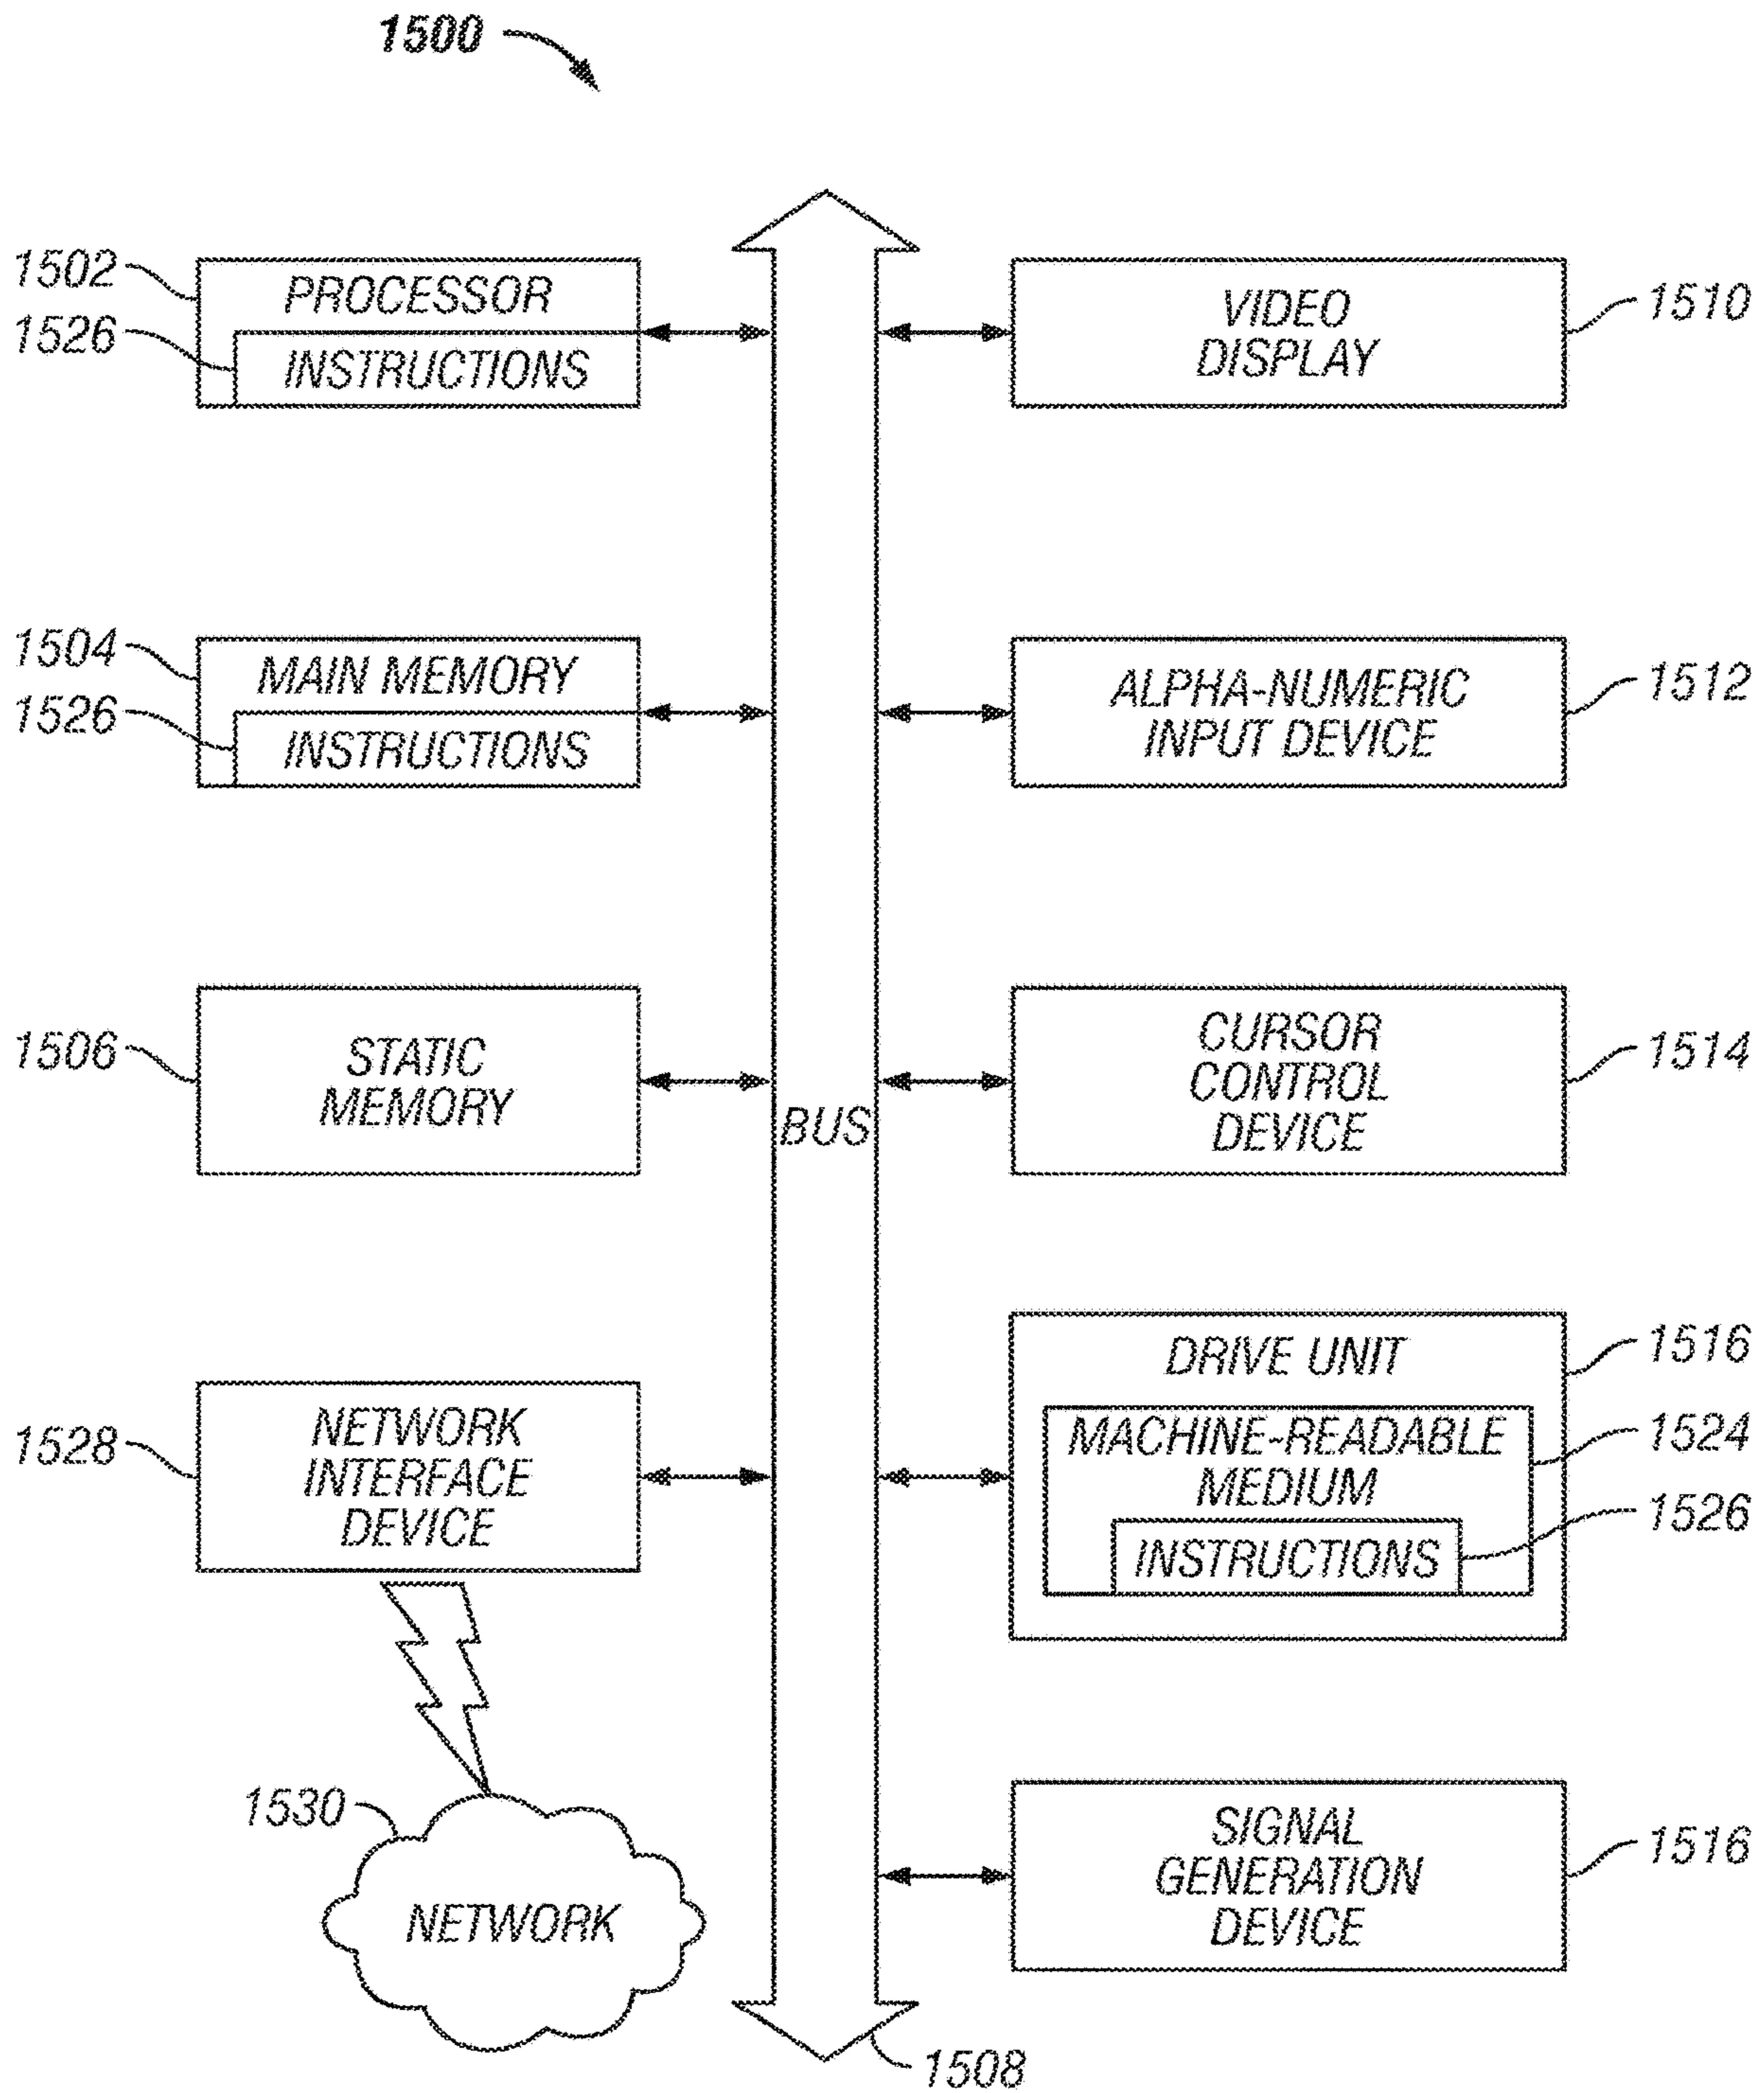


FIG. 15

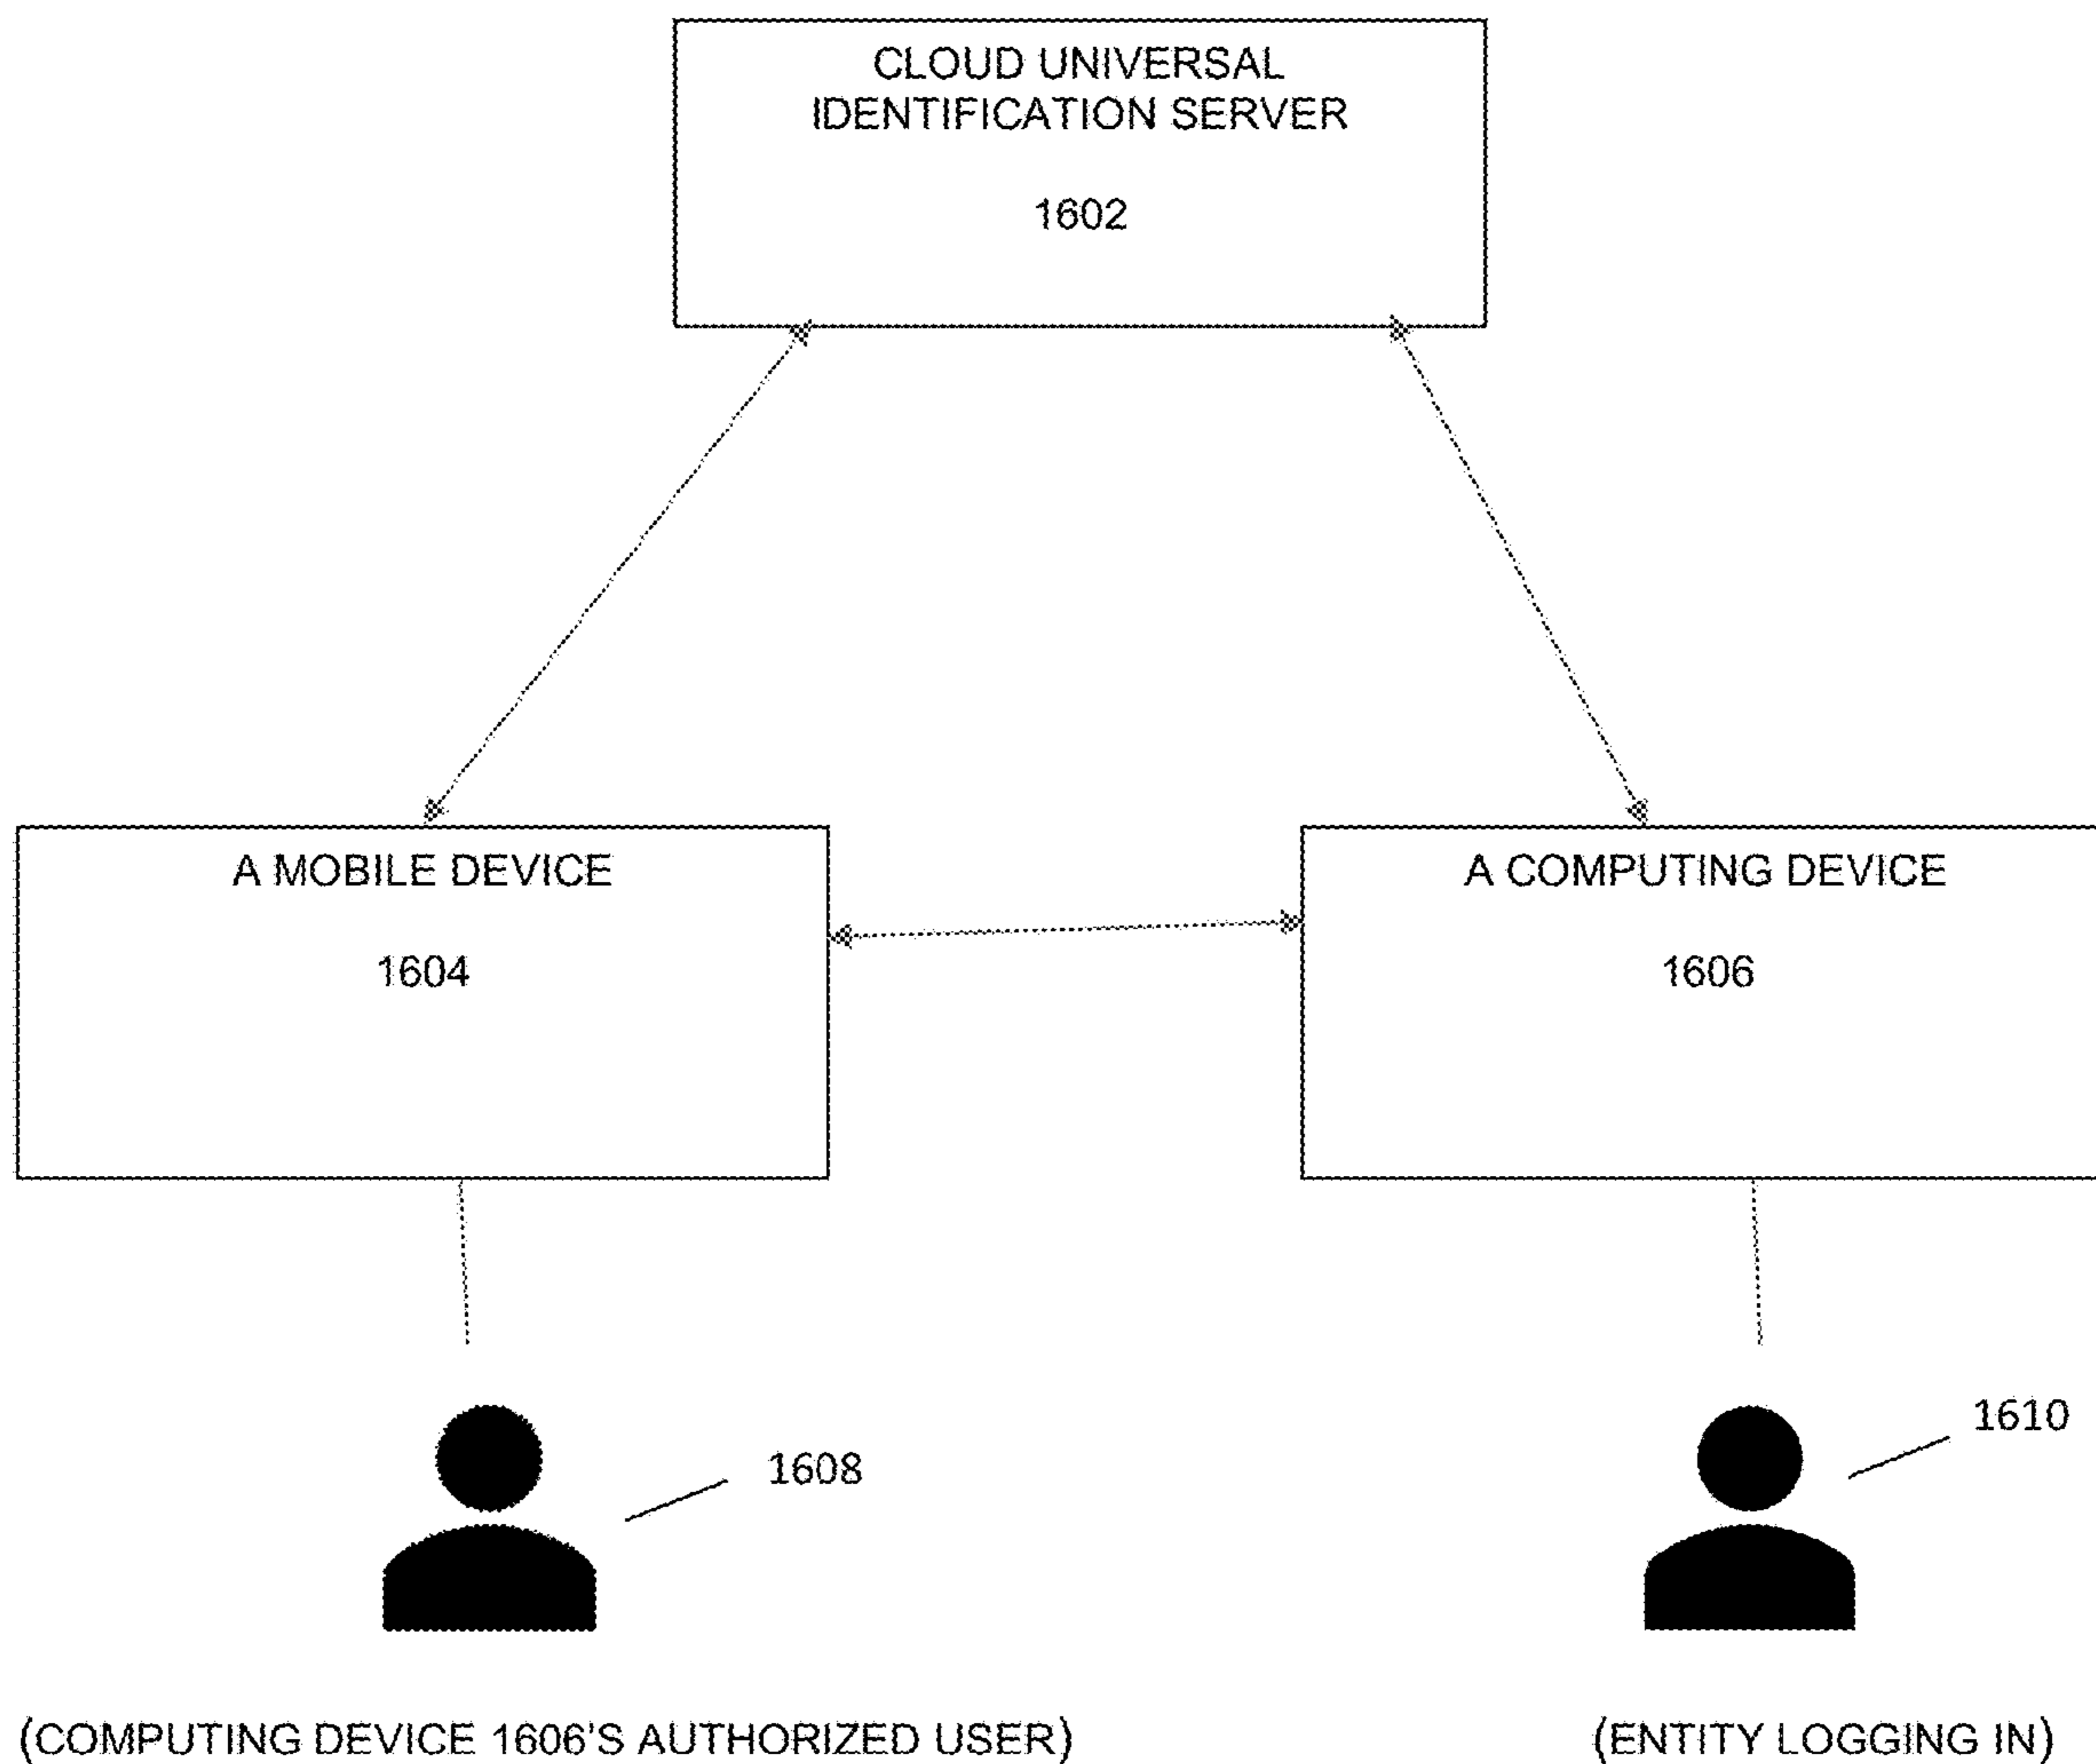


FIG. 16

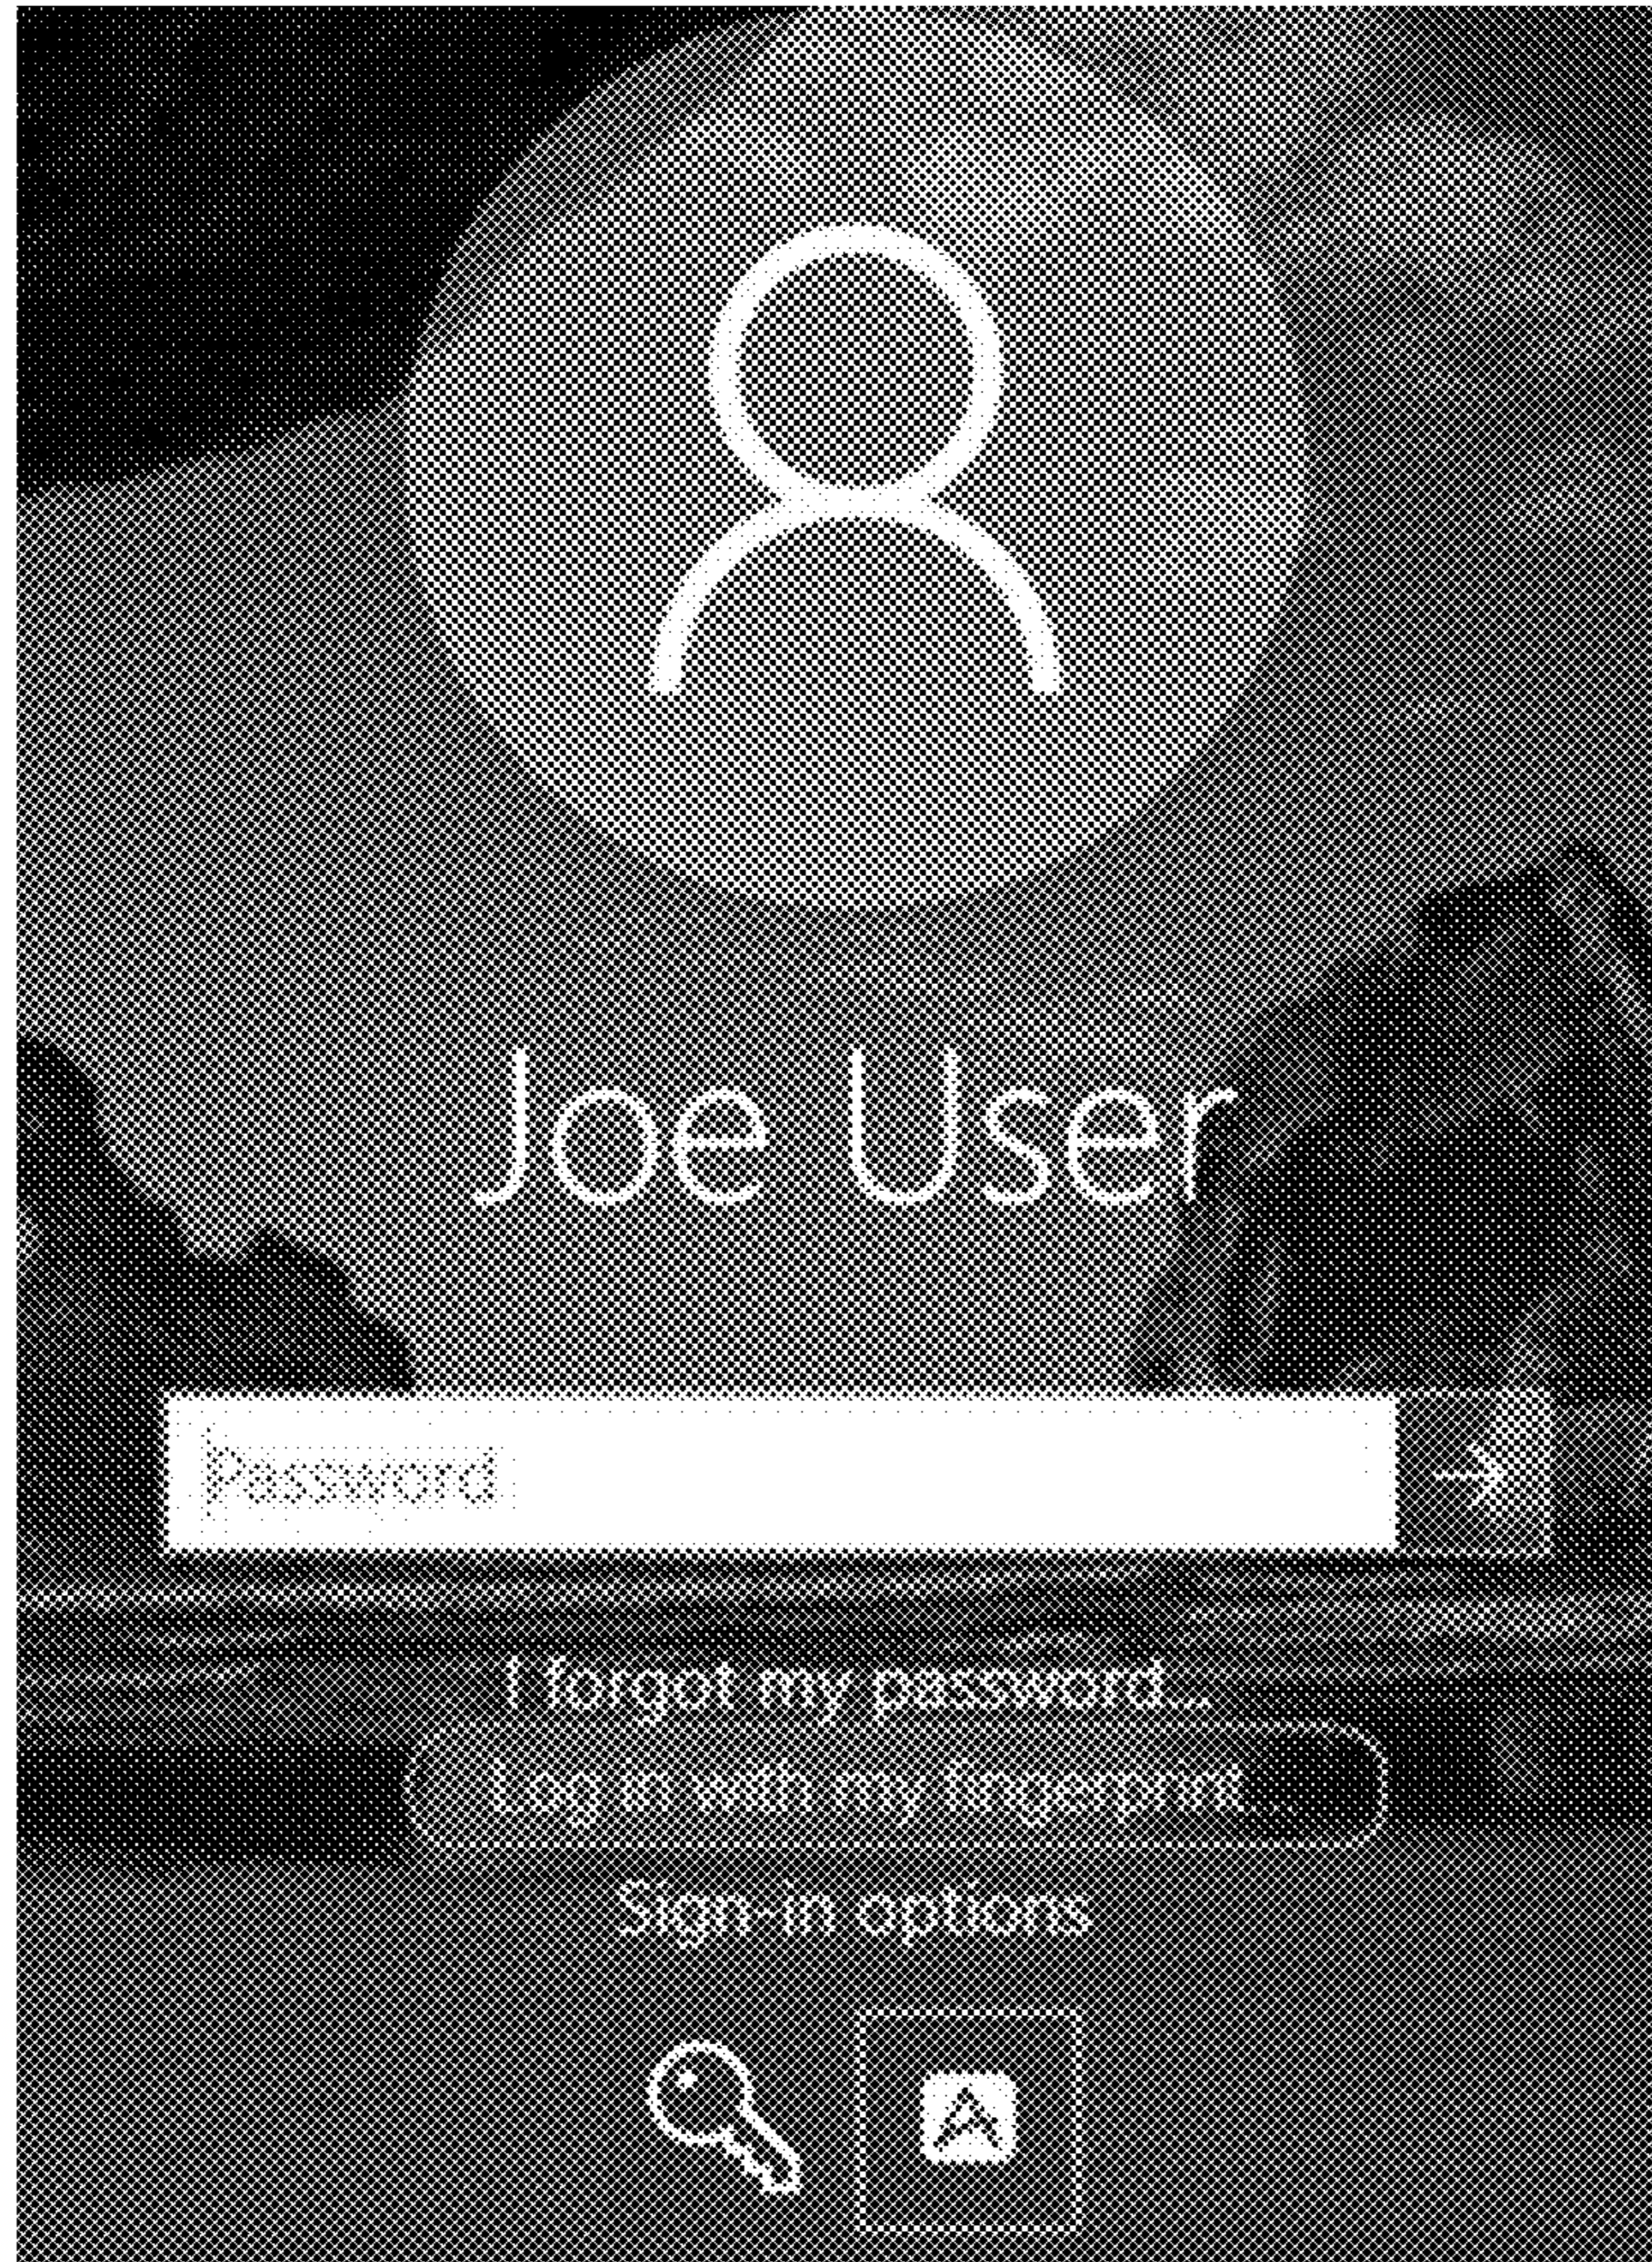


FIG. 17

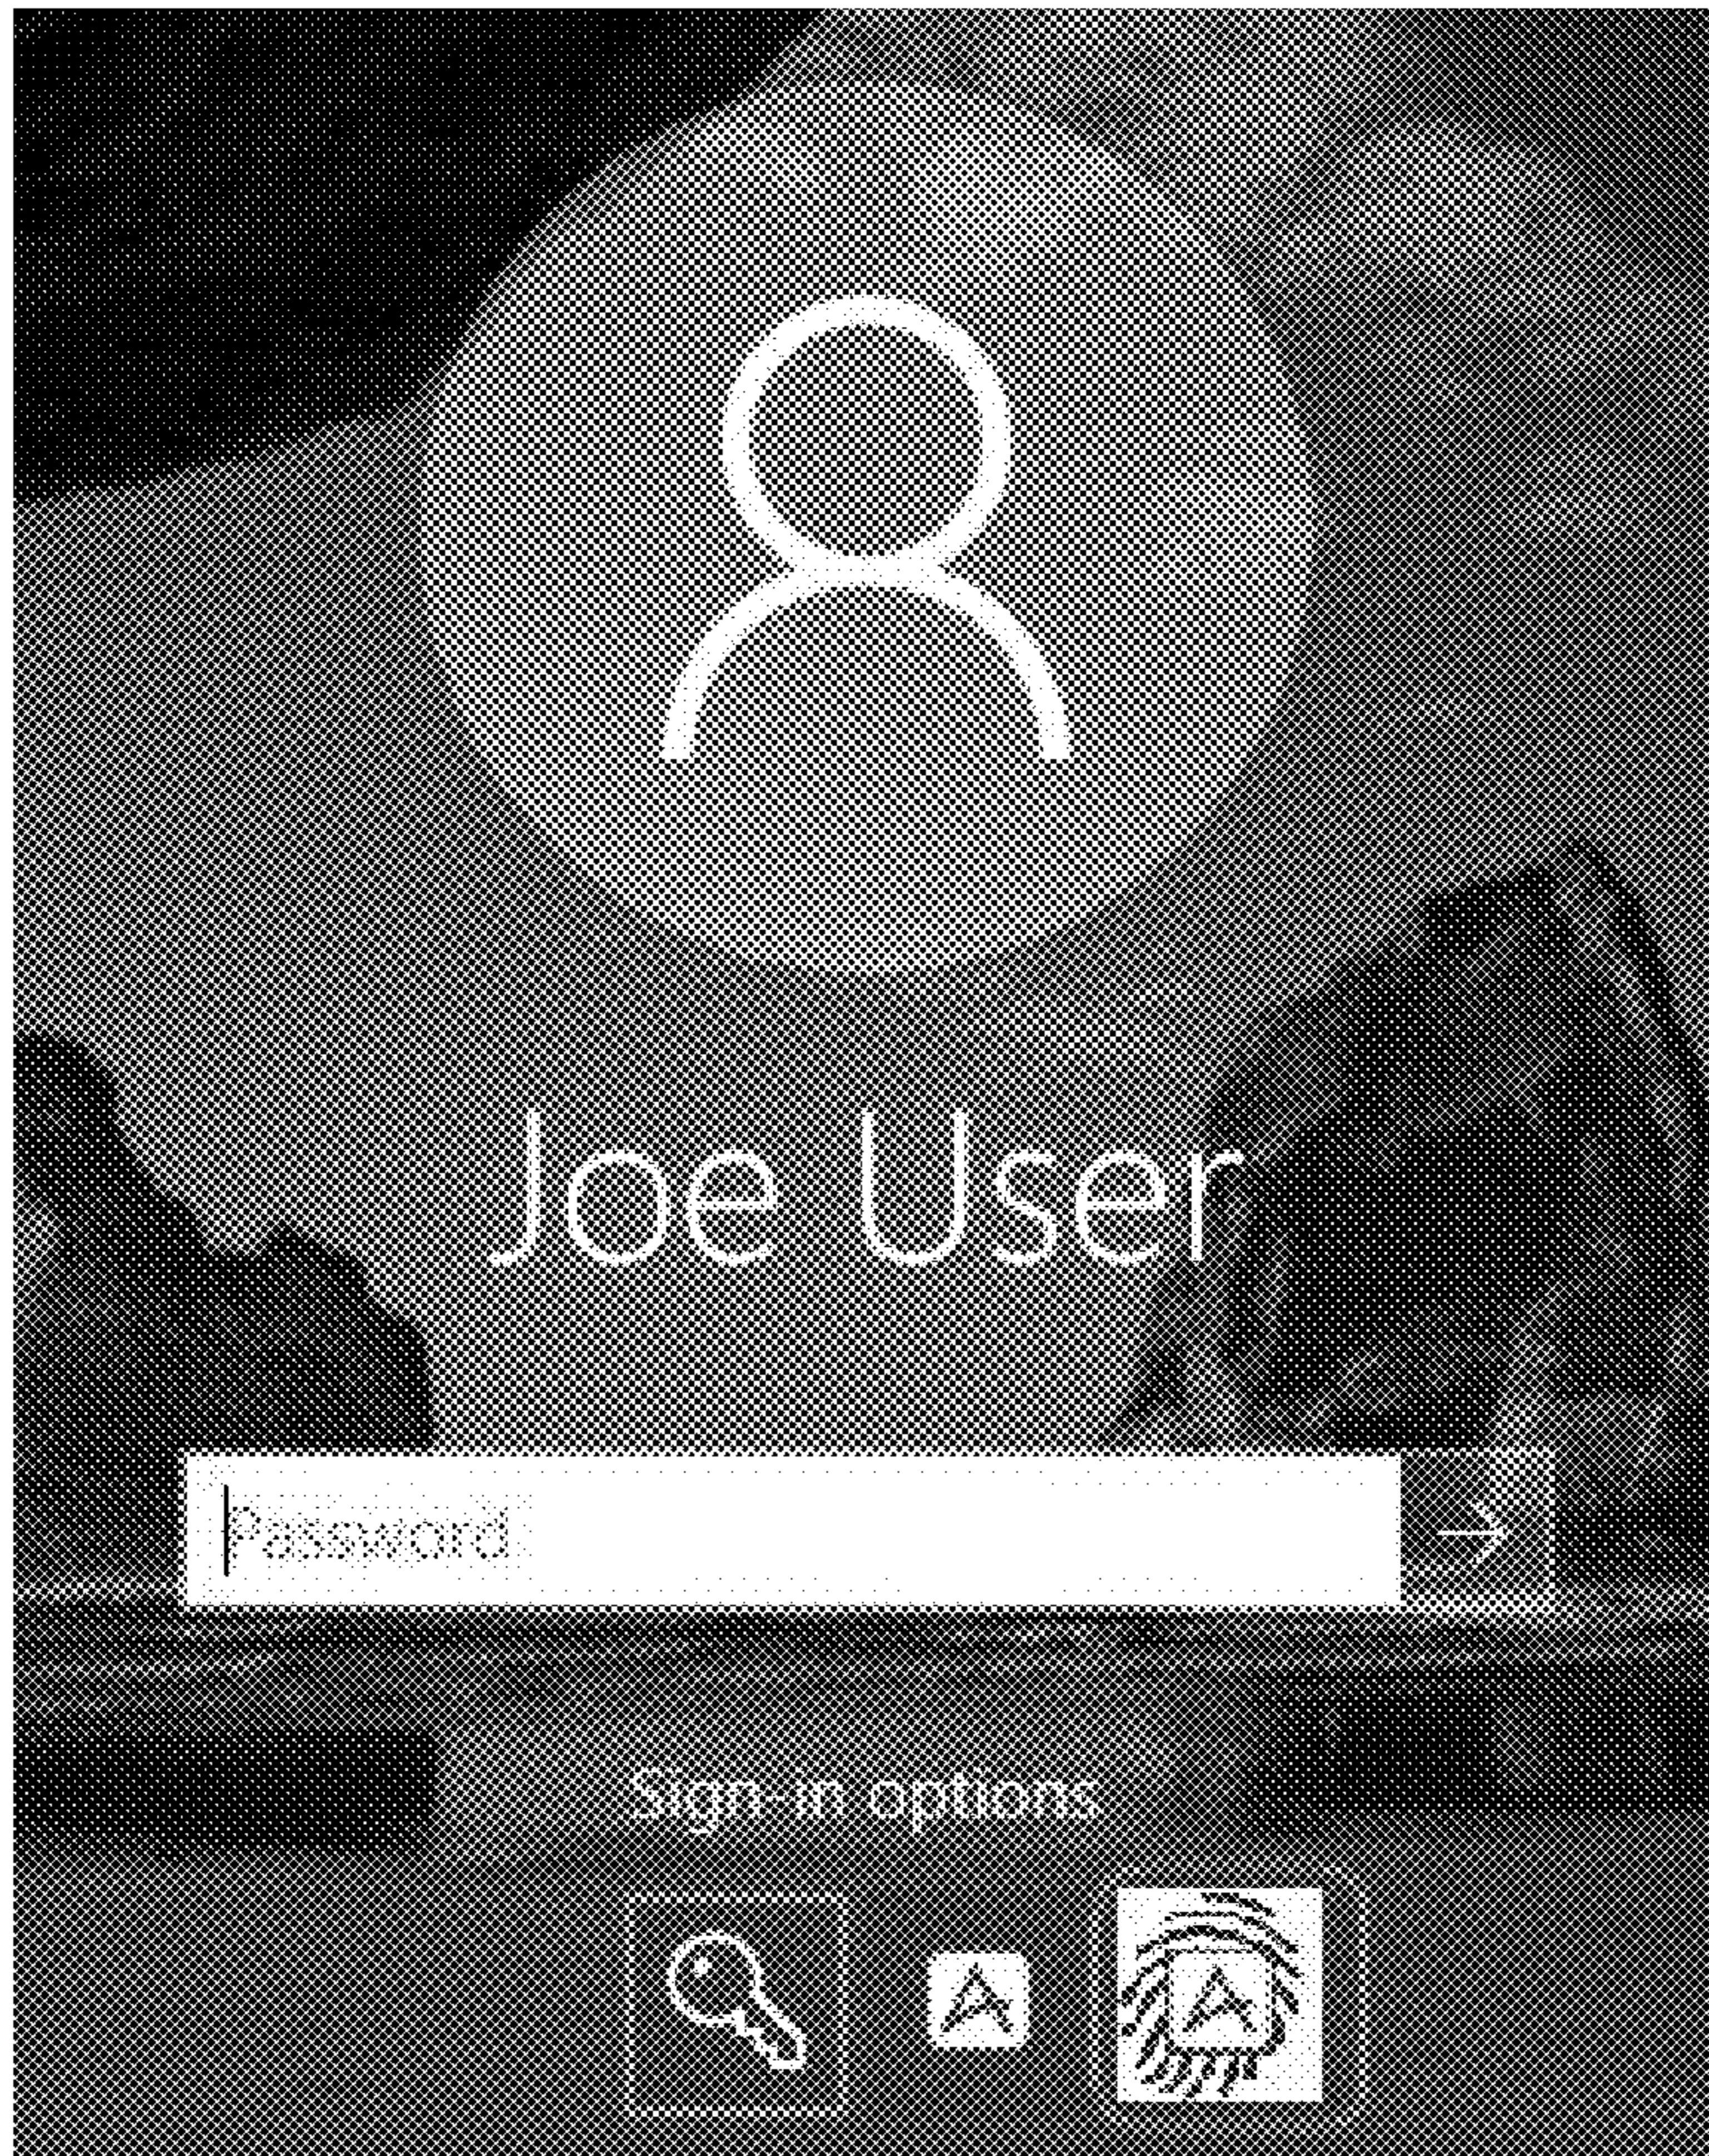


FIG. 18

**MOBILE DEVICE ENABLED DESKTOP  
TETHERED AND TETHERLESS  
AUTHENTICATION**

CROSS REFERENCE TO RELATED  
APPLICATIONS

This patent application is a continuation-in-part of co-pending U.S. patent application Ser. No. 15/626,997, AGGREGATOR TECHNOLOGY WITHOUT USER-NAMES AND PASSWORDS, filed Jun. 19, 2017, which is incorporated herein by reference in its entirety, which is a divisional of U.S. patent application Ser. No. 15/052,747 (now U.S. Pat. No. 9,686,273), AGGREGATOR TECHNOLOGY WITHOUT USERNAMES AND PASSWORDS, filed Feb. 24, 2016, which is incorporated herein by reference in its entirety, and additionally claims priority from U.S. Provisional Patent Application No. 62/120,153, SOCIAL SINGLE SIGN-ON AGGREGATOR WITHOUT USERNAMES AND PASSWORDS, filed Feb. 24, 2015, which is also incorporated herein by this reference in its entirety, and this patent application claims priority from U.S. Provisional Patent Application No. 62/501,027, MOBILE DEVICE ENABLED DESKTOP TETHERED AND TETHERLESS AUTHENTICATION AND METHOD AND APPARATUS FOR A SOCIAL NETWORK SCORE AND IDENTITY ASSURANCE SCORE TIES TO ID-LESS AND PASSWORD-LESS AUTHENTICATION SYSTEM, filed May 3, 2017, which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

Technical Field

This invention relates generally to the field of digital authentication. More specifically, this invention relates to mobile device enabled desktop tethered and tetherless authentication.

Description of the Related Art

Presently, an individual can log onto their computing device via a mobile device by means such as proximity of the mobile device to the computer. For example, rohos (SafeJKA S. R. L.) performs authentication in a computing device with a Bluetooth® (Bluetooth SIG, Inc., Kirkland, Wash.) device, in which the mobile device is required to be equipped with Bluetooth®. Proximity identification is limiting because suppose a thief gets hold of a mobile device and brings it close to the computing device. If the computing device allows logging in, because the mobile device is near, the thief then has access to the laptop, which is not a good result.

As well, many organizations rely on technological identity and access management solutions to keep pace with the growth of their organizations, e.g. gaming and hospitality enterprises. Thus, for example, such organizations deploy automated user de-provisioning or password policy enforcement.

In today's environment, partner enterprises allow an external user from one organization outside of their network to have access to an internal application of their organization within their own network. This type of partnership can be referred to as federated identity management. With using federated identity management, an internal application written at Company A can be made publicly available. For a user

at Company B on one type of network to access on an entirely different network the internal application written at Company A, the user has to perform the following procedure. The user creates an internal ID at Company A, enters the internal application and maps his external ID from his own network to his internal ID on Company A's network. Further, Company A can allow the user to access their internal application by the user using a social network account, such as a LinkedIn (Mountain View, Calif.; "LinkedIn") account for example. Then, Company A can link the external user's social network account sign on to Company A's internal application.

The technique described above allows Company A to manage their partners' access to their internal applications.

Today, there's a technology known as federation, which allows an enterprise to manage their partners' access to their internal applications. However, federation requires high maintenance for every partner company and a lot of initial effort to set up and configure.

SUMMARY OF THE INVENTION

A technique is provided that integrates authentication from a mobile device (e.g., using biometrics, social informational data, questions and answers, and more) to allow login to laptops and desktops while they are disconnected from the Internet using a USB cable connection, Bluetooth or local wifi or any other similar protocol and/or connected to Internet without USB. The technique provides a cloud clearinghouse that ties a person's or entity's mobile device(s) to an identity that's used to authenticate a person (could be the same person) on a laptop, desktop, or similar computer system.

BRIEF DESCRIPTION OF THE DRAWINGS

One or more embodiments of the present invention are illustrated by way of example and not limitation in the figures of the accompanying drawings.

FIG. 1 illustrates an example of an interface of a user's page of an aggregator platform, according to an embodiment;

FIG. 2 illustrates an example of a user interface showing two icons representing an enabled application on the aggregator platform and a not-enabled application on the aggregator platform, according to an embodiment;

FIG. 3 illustrates an example of a user interface showing a log in graphical user interface (GUI) for a user to add and configure an organization to his aggregator platform, according to an embodiment;

FIG. 4 is a schematic diagram of a system architecture for the aggregator platform, according to an embodiment;

FIG. 5A is a flow diagram of a process for registration to a social federation system, according to an embodiment;

FIG. 5B is a flow diagram of a process for registration to an aggregator system, according to an embodiment;

FIG. 6 illustrates an example of a user interface showing an SSO user sharing an application with an unregistered or registered SSO user, according to an embodiment;

FIG. 7 illustrates an example of a user interface showing a user has selected a Share command to send to a recipient user;

FIG. 8 illustrates an example of a user interface showing how after the SSO user proceeds with registration or log in to SSO, the system provides the user the capability of seeing his shared SSO applications, according to an embodiment;

FIG. 9 illustrates an example of a user interface of a delegation page in which a user can enter a delegation type, provider type, provider user name, applicable filters, and a selection of one or more applications to share, according to an embodiment;

FIG. 10 illustrates an example of a user interface showing a sample dropdown list of the provider types of FIG. 9, according to an embodiment;

FIG. 11 illustrates an example of a user interface showing a home page of the aggregator system, according to an embodiment;

FIG. 12 illustrates an example of two different devices, a tablet and a smartphone, each displaying the home page web page of the aggregator system, according to an embodiment;

FIG. 13 illustrates an example of a user interface showing four web applications that a user can configure to add to his aggregator system, according to an embodiment;

FIG. 14 illustrates an example of a user interface showing icons representing web applications which were added to the system and from which the user can launch with just one click, according to an embodiment;

FIG. 15 is a block schematic diagram of a system in the exemplary form of a computer system according to an embodiment;

FIG. 16 is a schematic diagram showing the interactions among parties of a cloud clearinghouse authentication system, according to an embodiment;

FIG. 17 is a screen show of a login screen linking to a credential provider, according to an embodiment; and

FIG. 18 is a screen show of a login screen linking to a credential provider, according to an embodiment.

#### DETAILED DESCRIPTION

A technique is provided that integrates authentication from a mobile device (e.g., using biometrics, social informational data, questions and answers, and more) to allow login to laptops and desktops while they are disconnected from the Internet using a USB cable connection, Bluetooth or local wifi or any other similar protocol and/or connected to Internet without USB. The technique provides a cloud clearinghouse that ties a person's or entity's mobile device(s) to an identity that's used to authenticate a person (could be the same person) on a laptop, desktop, or similar computer system.

Also introduced here is a technique with which to access a user's web applications. The user registers and signs on to an aggregator system using any supported login identity provider username and password. When the user registers for the first time, the system collects additional information to verify the user for a subsequent access to the system. The system also automatically creates a system secret username and secret, highly securely generated password, both of which are unknown and inaccessible to the user. The secret username and password are stored in a lightweight directory access protocol (LDAP) server or database or in a distributed cloud database system. The system also maps the login identity provider user name to the secret user name and password for subsequent usage.

References in this description to "an embodiment", "one embodiment", or the like, mean that the particular feature, function, structure or characteristic being described is included in at least one embodiment of the present invention. Occurrences of such phrases in this specification do not

necessarily all refer to the same embodiment. On the other hand, the embodiments referred to also are not necessarily mutually exclusive.

#### An Exemplary Embodiment of an Aggregator Platform without Usernames and Passwords

An exemplary embodiment of an aggregator platform without usernames and passwords is a social single sign-on ("sSSO") platform. It should be appreciated that the technique discussed herein can also refer to the aggregator system or application, depending on the context of the discussion. Such platform comprises a server that aggregates a plurality of web applications both internal to an organization and that are public facing to login identity providers including social networking sites such as for example LinkedIn or Facebook (Menlo Park, Calif.; "Facebook"). The platform presents the aggregation of such web applications as links provided to a particular user.

Examples of login identity providers include but are not limited to social networking sites, LinkedIn and Facebook. A sample non-exhaustive list can be found in FIG. 4, which is described in further detail below.

Non-exhaustive examples of web applications that can be aggregated by the server can be found in FIG. 1. FIG. 1 is a sample innovative interface of a user's page on a sSSO application, which displays a collection of web applications which the user had previously added to his sSSO application.

It should be appreciated that the aggregator platform is not limited to the social single sign-on environment. The techniques introduced herein are applicable to aggregators that allow end users to add an application, such that to link to the application at any future time, and from any device, would not need to reenter an ID and/or password. However, employing the social single sign-on implementation of the technique as discussion herein is for purposes of understanding the innovation herein and not for limiting purposes.

To access any of the user's web applications, the user registers and signs on to a social sign-on system ("sSSO") using any supported login identity provider user name and password. For example, the user can register to sSSO using his user name and password that he uses for his LinkedIn account. If the user is registering for the first time, the sSSO collects additional information to verify the user later such as for a subsequent access to sSSO. For example, sSSO can collect but is not limited to collecting the user's mobile phone number, questions and answers related to information unique to the user, pictures, biometric data, and/or social information from the identity providers, such as for example information regarding friends, pictures, dates, and conversations. sSSO also automatically creates an sSSO secret user name and a sSSO secret, highly securely generated password. Both such secret user name and secret password are unknown and inaccessible to the user. In an embodiment, this secret user name and secret password are stored in an lightweight directory access protocol (LDAP) server or database or in a distributed cloud database system, etc. sSSO also maps or links the login identity provider user name to the secret user name and password of sSSO system for subsequent usage.

After the user has registered, the user can start using signal sign-on to login automatically to web applications available to the sSSO system. The login identity provider is mapped to the sSSO secret internal user name for purposes of displaying the configured SSO enabled web applications to the appropriate sSSO logged in user. In short, the sSSO

secret internal user name is used to display the right apps (web applications) to the right user. Thus, for example, when the user obtains a new, upgraded smartphone, the user does not need to download and reenter the user ID and password for each of his web applications. The user can access any and all of his applications registered in the sSSO from the sSSO application.

FIG. 2 is a sample user interface showing icons representing an enabled and a not enabled SSO application. In this example, the leftmost icon, e.g. Office, represents an SSO enabled application while the icon to the right represents a web application, e.g. Office Depot, that is not enabled. In this example, the sSSO application is configured to display a visual indicator, such as the triangle with the exclamation sign inside, to indicate that such web application is not sSSO enabled.

In an embodiment, to enable a web application for sSSO requires entering a user name and optionally a password. An example implementation can be found in FIG. 3. FIG. 3 is a sample user interface of a registration screen to register a particular web application. In the registration screen, a user can enter his or her user name and optionally his or her password for the particular web application.

If the SSO web application, e.g. Office Depot in FIG. 3, is also a login identity provider then sSSO automatically maps or otherwise links the new login identity provider to the sSSO internal secret user name, which enables that login identity provider, e.g. Office Depot, to be used for login in purposes in addition to the existing registered login identity provider, e.g. the original sSSO system. As another example, Facebook and LinkedIn could both be login identity providers to the sSSO system assuming the LinkedIn web application was enabled for single sign-on.

If the sSSO user decides to login using a new unregistered login identity provider, e.g. Facebook, and the user never enabled that login identity provider web application for SSO, the sSSO system will attempt to identify the end user. For example, the sSSO system can go to and use a stored list of usernames and related metadata such as email addresses, actual names, etc., and display candidate selections, e.g. a list of users with similar names from the registered login identity providers, e.g. FACEBOOK: Julie@yahoo.com. That is, the sSSO system prompts the user to pick the login identity provider user name that they recognize. The login identity provider user name can be received by other input means such as for example the user entering his or her user name in a text box, audibly providing the user name, selecting an image that is recognized by the user, providing biometric data such as a finger print, and so on. In addition to using the received user input, the sSSO verifies the identity of the sSSO user by using additional registration information, that is information which was provided by the user when the user registered. For example, such additional registration information can include but is not limited to SMS, Questions/Answers, already registered login identity provider information, biometric information, etc.

#### An Exemplary Embodiment of Social Single Sign-on without Username or Password from a Single Sign-on Provider

An embodiment can be understood with reference to FIG. 4. FIG. 4 is a schematic diagram of a system architecture for an aggregator platform, such as for example sSSO, without username or password from the provider, such as for example a SSO provider, 400. A user 402 logs into a social single sign-on (sSSO) application 408, e.g. such as at a

website, SocialSSO.com for example, in a network environment such as in a cloud environment. A plurality of social login identity providers 404 are communicably connected with sSSO 408 such that for example a user can log onto sSSO 408 through any of these connected social login identity providers 404. sSSO 408 is communicably connected to a repository, sSSO login database (DB) 410. In this illustrative example, repository 410 is storing two user-names associated with user 402: Julia@yahoo.com associated with her Facebook account and JuliaT@icloud.com associated with her LinkedIn account. sSSO 408 is communicably connected to web applications in the cloud 406. When the user registered with sSSO 408, sSSO 408 requested additional data from the user that could be used in identifying the user at subsequent points in time. Types of such data include but are not limited to user data, passwords, mobile data, questions and answers, biometric data, and social data. sSSO 408 stores such data in a second repository 414 via a distributed directory information service over an Internet Protocol (IP) network 412 such as for example a Lightweight Directory Access Protocol (LDAP) system 412. These user names and other data stored in repository 414 and accessible via service 412 are invisible and inaccessible to the users. Thus, user 402 can login to sSSO 408 using any of her existing social usernames (as shown in repository 410) associated with the respective social login identity provider, which is linked to the user's secret data stored in repository 414. Then, after making the link, sSSO proceeds to verify the user by using any of such data in repository 414, such as for example, asking for a cell phone number or a asking a question and expecting a specific answer that matches a stored answer.

#### Social Federation Social Single Sign-on

Social Federation social single sign-on ("sFed") can be a system, API, or service that enables an organization such as a company, a university, or a government agency, etc. or end user to easily and securely enable an external party such as a contractor, vendor, alumni, family, friends, etc. access to internal (private) and external (public) web applications without using traditional federation technologies or manually requiring setting up a new user name and password. sFed combined with sSSO easily and securely shares web site login-related data with any user who already has a username and password on a login identity provider website.

An embodiment of the invention can be understood with reference to FIG. 5A. FIG. 5A is a flow diagram of a process for registration to a social federation system. To use the sFed system requires an external party to register in sSSO or any registered sSSO user to invite an unregistered sSSO user. After they have been registered, the sFed system detects sSSO registration and registered login identity provider user name. Using the sFed system, API, or service, the organization sFed administrator or a sSSO user can delegate (share) sSSO enabled web applications to a registered user or invite an unregistered sSSO user which automatically registers the user into the sSSO system by requiring the invited user to login once to the sSSO system using a login identity provider user name. For example, FACEBOOK: Julie@yahoo.com registers on sSSO and sFed verifies her identity by sending her a SMS token, or question associated with an expected (Q/A), or requiring a biometric confirmation. Thus, in an embodiment, requiring a user to remember and enter login informational data is not needed. sSSO is configured to transmit an alert to the user, where the user can respond with identifying-related data as discussed above.

An embodiment of the invention can be understood with reference to FIG. 5B. FIG. 5B is a process flow for registration to the sSSO system. A user such as an sSSO Client or sSSO Administrator sends an invitation to a recipient, e.g. sSSO Share App Recipient, for the purposes of sharing or delegating an application. If the sSSO recipient is already registered with sSSO, e.g. is a Registered sSSO User, then when such sSSO recipient logs in to sSSO and accepts the invitation, the delegated application is added by the sSSO system to the recipient's collection of sSSO applications. If the sSSO recipient is not yet registered with sSSO, then with the invitation, such recipient is provided the opportunity to register with the sSSO system by providing single or multi-factor verification data. Subsequently, the recipient is a registered sSSO user and the application is added to such user's collection of sSSO applications.

In an embodiment, sSSO enables a user to share login capability along with sharing an application.

FIG. 6 is a sample user interface showing an SSO user sharing an application with an unregistered or registered SSO user. The user initiates the process for the selected SSO application, e.g. Egnyte, by clicking on the icon.

FIG. 7 is a sample user interface showing a user has selected a share command to send to a recipient user. The share command can be sent via multiple methods including but not limited to email, SMS, social network, copying, etc.

FIG. 8 is a sample user interface showing how after the SSO user proceeds with registration or login to SSO, they subsequently have capability of seeing or accessing shared SSO applications. For example, the user can access the shared applications by selecting a drop menu that contains a link to a shared apps page. In this example, the system provides a link to shared applications for each recipient.

An embodiment provides a sSSO delegation administrator model and corresponding functionality. An administrator can delegate a particular sSSO user to a particular sSSO application, as shown in FIG. 9 for example. FIG. 9 is a sample user interface of a delegation page in which a user can enter a delegation type, e.g. SocialLogin.me, provider type, e.g. Sign in with Facebook, a provider user name, e.g. Julie@yahoo.com, applicable filters, and a selection of one or more applications to share, e.g. Go Daddy.

FIG. 10 is a sample user interface showing a non-exhaustive sample dropdown list of the provider types of FIG. 9, each selected type enabling the user to sign in to sSSO and/or sSSO's various enabled web applications or sSSO enterprise connected applications.

If the sFed administrator or sSSO end user is delegating (sharing) a SSO enabled web application, that is using a fixed username and password or a known user name and password to multiple people or shared within the organization to the sSSO user, then system is configured to cause the shared web application to automatically appear on the sSSO users' sSSO interface. For example, sFed uses an API or direct database calls to add the new SSO enabled web application to the user's sSSO interface.

If the sFed administrator is delegating a SSO enabled web application that is using a username and password that is unique to the sSSO user, then sFed automatically creates a user name and password on the enabled web application. For example, sFed can use a format for exchanging authentication and authorization data between parties such as between an identity provider and a service provider, e.g. Security Assertion Markup Language (SAML). Or sFed can use internal methods. Then the SSO enabled web application automatically appears enabled on the sSSO user's sSSO interface.

## Web Crawler for Applications Requiring Logons

A technique is introduced by which a web crawler system crawls for web applications that require logons, regardless of content. Each identified web application is added to a database, such as for example the sSSO databases 410 or 414, of such type of applications. In accordance to one technique, the web crawler system discovers a web application and then attempts to logon to the application with a bogus ID and a bogus password. If the attempt is unsuccessful, the web crawler system creates a definition for the web application, where the definition defines attributes of the web application. The web crawler system uses these attributes to categorize the web application within the database. Based on matching the categorization and user profiles, the web crawler system offers the web application to a particular user to add the web application to the user's aggregation of web applications. For instance, the web crawler system can display or send a message to the particular user indicating, "You like bicycles. Perhaps you'd like to add this bicycle application ('bikeapp.com') to your aggregated applications."

## Alternate Embodiments

A smartphone or tablet paradigm or environment illustrates how the innovation solves the technical problem of using computer network resources and bandwidth efficiently by streamlining user interactions with the network. FIG. 11 illustrates an example of a user interface showing a home page of the aggregator system. FIG. 12 illustrates an example of two different devices, a tablet and a smartphone, each displaying the home page web page of the aggregator system. FIG. 13 illustrates an example of a user interface showing four web applications that a user can configure to add to his aggregator system. FIG. 14 illustrates an example of a user interface showing icons representing web applications which were added to the system and from which the user can launch with just one click.

For any new device and in particular for the devices shown, the innovation streamlines user interactions with network, because the user does not need to download and reenter a user ID and password for each of the user's applications. With the technique introduced herein, the user can launch any application already registered in the aggregator platform with a single click, for instance as shown in FIG. 14.

A further efficiency, among others, is afforded the technique introduced here by enabling a user from any device the ability to login with one click to the aggregator system, e.g. as shown in FIG. 11.

A further efficiency is afforded the technique by allowing the user, in addition to launching with one click to a designated application, to add and configure a new application to his already registered applications, as shown in FIGS. 12 and 13.

## An Example Machine Overview

FIG. 15 is a block schematic diagram of a machine in the exemplary form of a computer system 1500 within which a set of instructions may be programmed to cause the machine to execute the logic steps of the invention. In alternative embodiments, the machine may comprise a network router, a network switch, a network bridge, personal digital assistant (PDA), a cellular telephone, a Web appliance or any



machine capable of executing a sequence of instructions that specify actions to be taken by that machine.

The computer system **1500** includes a processor **1502**, a main memory **1504** and a static memory **1506**, which communicate with each other via a bus **1508**. The computer system **1500** may further include a display unit **1510**, for example, a liquid crystal display (LCD) or a cathode ray tube (CRT). The computer system **1500** also includes an alphanumeric input device **1512**, for example, a keyboard; a cursor control device **1514**, for example, a mouse; a disk drive unit **1516**, a signal generation device **1518**, for example, a speaker, and a network interface device **1528**.

The disk drive unit **1516** includes a machine-readable medium **1524** on which is stored a set of executable instructions, i.e. software, **1526** embodying any one, or all, of the methodologies described herein below. The software **1526** is also shown to reside, completely or at least partially, within the main memory **1504** and/or within the processor **1502**. The software **1526** may further be transmitted or received over a network **1530** by means of a network interface device **1528**.

In contrast to the system **1500** discussed above, a different embodiment uses logic circuitry instead of computer-executed instructions to implement processing entities. Depending upon the particular requirements of the application in the areas of speed, expense, tooling costs, and the like, this logic may be implemented by constructing an application-specific integrated circuit (ASIC) having thousands of tiny integrated transistors. Such an ASIC may be implemented with CMOS (complementary metal oxide semiconductor), TTL (transistor-transistor logic), VLSI (very large systems integration), or another suitable construction. Other alternatives include a digital signal processing chip (DSP), discrete circuitry (such as resistors, capacitors, diodes, inductors, and transistors), field programmable gate array (FPGA), programmable logic array (PLA), programmable logic device (PLD), and the like.

It is to be understood that embodiments may be used as or to support software programs or software modules executed upon some form of processing core (such as the CPU of a computer) or otherwise implemented or realized upon or within a machine or computer readable medium. A machine-readable medium includes any mechanism for storing or transmitting information in a form readable by a machine, e.g. a computer. For example, a machine readable medium includes read-only memory (ROM); random access memory (RAM); magnetic disk storage media; optical storage media; flash memory devices; electrical, optical, acoustical or other form of propagated signals, for example, carrier waves, infrared signals, digital signals, etc.; or any other type of media suitable for storing or transmitting information.

Further, it is to be understood that embodiments may include performing computations with cloud computing. For the purposes of discussion herein, cloud computing may mean executing algorithms on any network that is accessible by internet-enabled devices, servers, or clients and that do not require complex hardware configurations, e.g. requiring cables, and complex software configurations, e.g. requiring a consultant to install. For example, embodiments may provide one or more cloud computing solutions that enable users, e.g. users on the go, to login to sSSO web applications using social network identity providers or share sSSO web applications anywhere on such internet-enabled devices, servers, or clients. It further should be appreciated that one or more cloud computing embodiments include allowing a user to login to sSSO web applications using social network identity providers or share sSSO web applications using

mobile devices, tablets, and the like, as such devices are becoming standard consumer devices.

#### Overview of Mobile Device Enabled Desktop Tethered and Tetherless Authentication

In accordance with an embodiment, a technique or system integrates authentication from a mobile device (e.g., using biometrics, social, questions and answers, and more) to allow login to laptops and desktops while disconnected from the Internet using a USB cable connection, Bluetooth or local wifi and/or connected to Internet without USB. The innovation provides a cloud clearinghouse that ties a person's or entity's mobile device(s) to an identity that's used to authenticate a person (could be the same person) on a laptop, desktop, or similar computer system.

In an embodiment, an application is installed on the laptop or desktop to recognize the mobile device.

In an embodiment, a Cloud Universal Identification ("Cloud UID") system stores various identifying attributes and aspects of a user or device. For example, in an embodiment, Cloud UID stores and can retrieve for matching: an email address, a social login, an ID from the Cloud UID's database, a numeric ID, a Windows login, or Active Directory ID. In an embodiment, prior to a login attempt, a credential provider is installed on the user's PC, laptop, Mac, or similar device. The PC, laptop, Mac, or similar device is communicably connected with Cloud UID and this connection allows the credential provider to authenticate the user. In an embodiment, the credential provider communicates with Cloud UID such that it is able to validate a user is who the user claims to be or that the device is what the device claims to be.

In an embodiment, during a login process, the PC, laptop, Mac, or similar device is turned on by a user. It should be appreciated that the user can be any user, not necessarily the person whose account is associated with the PC, laptop, Mac, or similar device. At the display of the PC, laptop, Mac, or similar device, the user is presented with an option to login via mobile device ("mobile login"). Upon selection of mobile login, an alert is sent to the mobile device registered or associated with the PC, laptop, Mac, or similar device. The alert can indicate something like, "Someone is trying to log in to your laptop. Ok to proceed? If so, please reply by clicking the Yes button, otherwise do nothing or click the No button." Thus, for example, suppose Parent 1 is working late at the office, but Child 1 needs to log in to Parent 1's desktop at home. Upon Child 1's turning on the desktop, the credential provider can send a message to Cloud UID requesting authentication. Cloud UID can identify the desktop or any other related identifying data (e.g., an associated email address, etc.) from the message by the credential provider and, because "mobile login" was selected and indicated in the message from the credential provider, look up in its database for a way to communication with the registered mobile device. Upon receiving an affirmative indication from the mobile device via any network, the Cloud UID can retrieve and send the log in information (e.g., ID and password) registered for or associated with the desktop automatically and without user intervention to the desktop, resulting in the desktop being logged into.

In an embodiment, the Cloud UID is configured to implement 1, 2, 3, or N factor authentication in conjunction with sending an alert to the mobile device. That is, the Cloud UID requests further and specific data (e.g., email address, active

directory ID, social login, etc.) from the turned-on PC, laptop, Mac, or similar device based on is configured factor authentication.

In an embodiment, an app is provided that can be downloaded from an app store onto the mobile device, in which a user enters an ID, which then ties the ID in the cloud to the mobile device, such as for example, via the phone number of the device.

In an embodiment, a credential provider app can be downloaded from a business site and stored on the computing device to cause the computing device to communicate with the Cloud UID.

In an embodiment, in execution, the laptop or desktop sends a notification to the mobile device to perform the authentication process. Thus, for example, suppose a woman is on a social date and brought her laptop with her. Suppose the woman went to the bathroom and left the laptop with the other person with whom she is out on a date. If this other person tries to logon to the laptop while the woman is out of sight, the innovation causes the woman's cell phone to notify or alert her that someone is requesting authentication to log onto the laptop. The woman can choose to proceed or deny the request to log into the laptop.

In an embodiment, a credential provider installed on the computing device talks to the CUID server to obtain clearance to allow a login request. Once the credential provider program obtains clearance, the credential provider allows the requestor to log in to the computing device.

#### An Exemplary of Mobile Device Enabled Desktop Tethered and Tetherless Authentication System and Method

An embodiment can be understood with reference to FIG. 16, a schematic diagram showing the interactions among participating parties of a mobile device enabled desktop tethered and tetherless authentication application or system. In an embodiment, a cloud universal identification server 1602 is communicably connected to a computing device 1606 and a mobile device 1604. As well, computing device 1606 is communicably connected to mobile device 1604. The connection can be over the Internet, Intranet, USB, wifi, Bluetooth, and any other communications protocol. In an embodiment, cloud universal identification server 1602, computing device 1606, and mobile device 1604 communicate using APIs.

In an embodiment, the entity 1610 trying to log into computing device 1606 does not have to be the same entity 1608 to which computing device 1606 belongs or is otherwise authorized to use or own computing device 1606. For example, entity 1610 can be a child trying to log into his parent's 1608 computing device 1606 and, yet, in accordance with the innovation, it is the parent 1608 who authorizes the logging in process.

In an embodiment, entity 1608 has previously registered with and has had stored data reflective of a plurality of identity attributes as discussed within this application. For example, entity 1608 could be the parent of the example above who already has housing loan information, color preferences, social media friends, birthdate, biometric data such as fingerprints, etc., previously stored in a secure storage (not shown) communicably connected to cloud universal identification server 1602.

In an embodiment, cloud universal identification server 1602 is system 400 described in detail above and/or any of its subparts such as for example LDAP 412 or database 414.

In an embodiment, cloud universal identification server 1602 continually updates information about entity 1608 as entity 1608 continues to directly or indirectly provide identity information, such as new or updated medical records, new job applications, and the like. Such digital information can be available to cloud universal identification server 1602 via APIs.

In an embodiment, cloud universal identification server 1602 receives registration information that associates a mobile device with the plurality of identifying attributes associated with the user. For example, entity 1608 can register their mobile device 1604 with cloud universal identification server 1602. In another embodiment, entity 1608 can register their mobile device 1604 with code previously installed on computing device 1606. In an embodiment, entity 1608 registers a plurality of mobile devices 1608 with either or both of cloud universal identification server 1602 and computing device 1606.

In an embodiment, entity 1608 can register a plurality of computing devices 1606 with cloud universal identification server 1602.

Thus, authentication can occur on any registered computing device via any registered mobile device of entity 1608.

In an embodiment, cloud universal identification server 1602 receives, during a login process by entity 1610 to computing device 1606, a request to authenticate the login process at computing device 1606.

In an embodiment, the request is received from mobile device 1604. In the embodiment, computing device 1606 had previously installed code, which initially presents to a user a login option to log in via mobile device. Computing device 1606 is configured to send a type of login request or notification of a login to mobile device 1604, upon receiving user input that mobile device login is selected. Computing device 1606 can know which mobile device to send the request or notification to by various means. Computing device 1606 can detect the presence of mobile device 1604 and be configured to send the request or notification to the detected device. Computing device 1606 can be pre-configured to send any request or notification to specifically mobile device 1604. Computing device 1606 can make a call to cloud universal identification server 1602 to ask to which mobile device to send the request or notification. Other configurations for identifying which mobile device to notify of the login process are contemplated within this discussion.

In an embodiment, mobile device 1604 is tethered to computing device 1606 and computing device 1606 is not connected to the Internet. In this embodiment, computing device 1606 sends the request or notification to mobile device 1604 which has wifi, Bluetooth or other capabilities to communicate over a network with cloud universal identification server 1602 to complete the login process as discussed herein.

In an embodiment, the request is received from code previously installed on computing device 1606.

In an embodiment, cloud universal identification server 1602 confirms, via a parameter in the request, the identity of computing device 1606. For example, cloud universal identification server 1602 can compare and match the identity of computing device 1606 received in the request for authentication with one of previously registered computing devices.

In an embodiment, in response to identifying computing device 1606, mobile device 1604, and their relationship, cloud universal identification server 1602 transmits to mobile device 1604 authentication factors associated with the entity 1608. In an embodiment, the authentication factors

were previously stored in the storage of the cloud universal identification server **1602**. An example identity authentication system is described in co-assigned patent application titled, “METHOD AND APPARATUS FOR AN IDENTITY ASSURANCE SCORE WITH TIES TO AN ID-LESS AND PASSWORD-LESS AUTHENTICATION SYSTEM,” which is incorporated herein by reference in its entirety. For example, entity **1608** is asked to provide their favorite color, the model of their current car, and a fingerprint to the touchscreen of mobile device **1604**.

In an embodiment, cloud universal identification server **1602** receives data which reflects answers to or satisfaction of the authentication factors from mobile device **1604**. Subsequently, cloud universal identification server **1602** confirms such received data by comparing and matching such data with data previously stored on the storage of cloud universal identification server **1602**. In another embodiment, cloud universal identification server **1602** confirms such received data by comparing and matching such data with data on the Internet in real-time.

After confirming the authentication of entity **1604**, cloud universal identification server **1602** transmits to computing device **1606**, informational data causing the login process to be successful. For example, the informational data can be presented on a screen on computing device **1606** to entity **1610**, indicated a login and password that entity **1610** needs to type in to log into computing device **1606**. In another embodiment, cloud universal identification server **1602** transmits the login information computing device **1606** and computing devices **1606** applies that information to complete the login process, without intervention of entity **1610**.

#### An Exemplary Embodiment of Mobile Device Enabled Desktop Tethered and Tetherless Authentication

In an embodiment, a computer-implemented method (or in alternative embodiments, a system or non-transitory computer-readable medium) is provided, the method comprising: receiving and storing, at a cloud universal identification server having a digital storage, a plurality of identifying attributes associated with a user; receiving and storing, at the cloud universal identification server, registration information that associates a mobile device with the plurality of identifying attributes associated with the user; during a login process to a computing device associated with the user, receiving a request to authenticate the login process at the computing device, the request received from either the mobile device or from code previously installed on the computing device; confirming, at the cloud universal identification server, the identity of computing device of the request for authentication by positively matching the identity of the computing device with one of previously registered computing devices, registered at the cloud universal identification server; transmitting, by the cloud universal identification server, at least three authentication factors associated with the user, the at least three authentication factors for delivery to the mobile device, and the at least three authentication factors obtained or derived from authentication factors associated with the user previously stored in the storage of the cloud universal identification server; and upon receiving, at the cloud universal identification server and from the mobile device, data that satisfies the at least three authentication factors, transmitting for delivery to the computing device, authentication data causing the login process to be successful; wherein one or more steps are performed on at least a processor coupled to at least a

memory. The exemplary method can further comprise wherein the computing device is communicably connected to the cloud universal identification server via the previously installed code and wherein such code recognizes the mobile device via a previous registration of the mobile device to the code. The exemplary method can further comprise wherein the entity initiating the login process is not the user. The exemplary method can further comprise wherein the computing device is any of: a desktop or laptop computer. The exemplary method can further comprise wherein an attribute of the plurality of identifying attributes is any of: an email address, a social login, an ID from the digital storage, a numeric ID, a computer login, or Active Directory ID. The exemplary method can further comprise wherein an app was previously downloaded on mobile device for purposes of associating the mobile device with the cloud universal identification server and with the computing device. The exemplary method can further comprise wherein the computing device is configured to send a notification to the mobile device causing the mobile device to request authentication at the cloud universal identification server. The exemplary method can further comprise wherein a plurality of computing devices associated with the user are registered at the cloud universal identification server. The exemplary method can further comprise wherein a plurality of mobile devices associated with the user are registered at the cloud universal identification server.

#### An Exemplary Credential Provider

In an embodiment, biometric authentication may be offered on any network attached Windows PC (the user is not assumed to be an Enterprise user or part of a corporate network, but is a personal user on a home computer, e.g. “grandma” and “kids”).

Herein, the innovation is collectively referred to as “the system.”

How

In an embodiment, biometric authentication calls are incorporated into the credential provider (“CP”) product. When attached to a network, the CP will make calls to a provided biometric partner to validate the user’s identity from the CP and allow access.

In an embodiment, the following hold:

In order for biometric authentication to work from a given personal computer (“PC”), the PC is able to make a network call to the system’s biometric cloud service. The system tethers the PC to the internet by using a Bluetooth, wifi, or USB connection to the user’s phone. The CP is configurable with needed information to make an oath call to the correct bio authentication service in the cloud.

In a corporate identity management system (e.g., Avati-er’s Identity Management System) AIMS install, each AIMS cluster is configured with the needed oath info, but

In a Windows app, each installation must have the needed credentials.

Either all users of the CP app authenticate using a common set of oath credentials, or the system segments the users in such a way that they talk to a range of different authentication services

A user may bio authenticate into local accounts on the PC

A user may bio authenticate into a local account on a PC if they have previously provided bio enrollment for the given account at that PC

## 15

“Enrollment” consists of a one-time operation where the user enters non-bio credentials to log in (e.g. userid and password) and then clicks on a link to perform bio enrollment. The bio enrollment validates that the user can pass a bio challenge, and if so, enroll their information.

## Installation Use Cases

## Downloading App from System’s Site

The user can download a CP installer from a system web site. The file would be an MSI and would require the user to install with administrative authority (using UAC)

## Downloading App from MS App Store

The user can download a CP installer from the MS App store. The app would have to pass any Microsoft-imposed limitations/restrictions in order to be added to the store. Updates to the app would require recertification from MS.

## Installation Authority

The user must have administrator authority to install the CP. The CP code will be called from the windows LoginUI, which runs as Administrator, so anything it calls must be installed as Administrator (otherwise any user on the system could install anything they wanted (e.g. keyboard logger, hard disk formatter, etc.) and it might end up being run as Administrator anytime anyone attempts to log in to the box.

## OAuth Configuration Use Cases

## Initial Downloading of OAuth URL and Credentials

During installation of the CP, the installer will retrieve the current OAuth credentials from the system’s Bio Credential cloud service. The CP will only function after credentials have been downloaded, validated, and installed. The credentials will consist of a digitally signed credential file and a \*.cer file containing the public certificate that the CP can use to validate the signature of the credential file.

## Updating to Current OAuth URL and Credentials

The first time the CP is launched on a given day (i.e., at most, once per day) the CP will query the system’s Bio Credential cloud service to check for any updates to the credentials. If updates are available, the CP will download the latest credentials and associated \*.cer file, validate the signature, and install them. All future bio authentication calls will use the updated OAuth credentials.

## OAuth URL

In order to perform a bio challenge against a user, AIMS currently sends http requests to the base URL of the bio web service:

`https://gmi-ha.iwsinc.com`

Based on the type of call AIMS is making to the web service, AIMS adds additional components to the URL:

Generate an authentication token: Appends  
`/userManager/oauth/  
 token?scope=SCOPE_TENANT_ADMIN&grant_type=  
 client_credentials`

Submit a bio challenge to the server  
`/tenant/{tenantName}/app/{appCode}/template/{templat-  
 eName}/person/{bio/d}/message`

In the text above, the bold items come from the downloaded OAuth credential file. The bold/italicized item is user specific and is specified by the user during a login attempt with the CP.

## Partitioning of OAuth Credentials

It may be desirable/required for some CP users to send bio requests with one set of OAuth credentials, while other users send with another. However, if the target audience for the product is individuals, then all individuals would most likely send with the same credentials. For load balancing purposes, CP might not send requests with a comment set of creden-

## 16

tials. There is contemplated other reasons to do so (e.g. offering different QoS for a fee).

## Security Use Cases

## Protecting OAuth Credentials From Tampering

If the OAuth credentials were to be tampered with, then the CP could end up contacting a malicious server to service bio requests, which could lead to revealing user’s bio information to a hacker (MITM attack) and could lead to allowing malicious users access to a PC (by using a fake server to return fake positive results). The OAuth credentials need to be protected from being tampering (must be encrypted and/or signed).

Using private/public key signing, the OAuth credential providing service should digitally sign each credential file and provide an associated public key

## Protecting OAuth Calls From DNS or /etc/hosts Attack

As the end user’s machine contacts the bio server, it needs to be provable that it is communicating with the correct server, otherwise a MITM could collect information and/or provide invalid responses to bio challenges. The code sends requests to the host `gmi-ha.iwsinc.com`, but if the client were to resolve the host to the IP address of a malicious server, then the server could log user’s bio information and/or return false positive results.

May indicate a high level of security:

In one use case a requestor’s server talks to the system’s authentication server using OAuth 2 credentials through an SSL/TLS framework. Using OAuth2 is a standard mechanism for securing communications and should make hijacking that communications channel more difficult.

On the mobile client-side communication is initiated through APN or GMC networks, which is secured with KPI and then the messages themselves are pulled from our authentication server, which is protected using OAuth 2 credentials through an SSL/TLS framework.

Responses are polled from our servers (using the same security mechanism mentioned above) or sent through postback to designated servers (when using the polling method.) Additionally, each authentication request generates a transactionID and a responseID, so that can independently verify transaction requests and responses from the server.

## Identifying Source of Bio Challenge to End User

Assuming two bio challenges are issued at about the same time (perhaps from two PCs, or maybe from a PC and from a web page or a credit card transaction), as the user is presented with the challenges on their device, can the user distinguish which challenge came from which service? What if 2 challenges came at roughly the same time, one from a fraudulent device and one from the real device? If the user could not distinguish between the two, they may approve the first (i.e. the fraudulent one).

Similarly, if an attacker could time things correctly or if they could insert a MITM or even a simple proxy in the network, they could detect that a bio challenge was sent for the user and then immediately send a similar fraudulent challenge just ahead of the true one. This could cause the fraudulent challenge to arrive at the user’s device first. The user would be expecting the challenge to arrive and would answer it without suspecting it is fraudulent. The attacker could then use the response to “legitimately” gain access to a resource that they truly don’t have the rights to. To solve this issue, the challenge must state from what machine it came; it would be even better if the challenging client

displayed a random code and as the challenge arrives, it also contains the same random code to validate which client it came from.

#### Enrollment Use Cases

##### Initial Enrollment

After installing the CP, the user first enrolls their biometrics against a local account and then they will be allowed to log into the enrolled local account with biometrics alone. The

CP login tile will include field allowing the user to specify who they are and a login button.

1. From windows login screen, the user selects the system's CP tile (assuming windows 8+, which is a User First model)

2. There are no enrolled users, so the CP does not display an "Unenroll" link (see use cases below) or if it does display the link, it will be disabled.

3. The user enters their local account name and presses the login button

4. The account is not enrolled, so the CP prompts the user to enter their bio identity (email address with which the bio app is configured on their device)

5. The CP sends a challenge to the user's device

6. The user successfully answers the challenge

7. The user has not shown that they have any rights to log in to the local account, so the CP prompts the user for the current password

8. The CP prompts for an optional display name of this authentication, such as "left thumb" or "facial"

9. The CP calls Windows LSA (Local Security Authority) service to validate the password

10. The password validates, so the CP has verified that the user has rightful access to the local account and that the user can be bio authenticated with the provided bio identity email address

11. The CP creates the user's BioEnrollment Data as a tuple consisting of (LocalMachineName, LocalAccountName, BioIdentity, DisplayName).

12. The CP stores the BioEnrollment Data in a secure manner. The BioEnrollment datastore is security sensitive data; an attacker could modify the data and gain access to any local account on the box. It is preferable that the data be locally stored for the following reasons:

a. It only has meaning on the local box

b. If it were stored publically, then one must concern oneself with how to secure it during transport and while at rest

##### Unenrollment

In order to unenroll (remove BioEnrollment Data), the user must pass a bio challenge first. The requirement to pass a bio challenge stops a malicious person from removing the BioEnrollment data without the true user's consent. The unenrollment works as follows:

1. From windows login screen, the user selects the system's CP tile (assuming windows 8+, which is a User First model)

2. If there is at least one enrolled user, then the CP will display an "Unenroll" link, but the link will be disabled while waiting for user input.

Alternative: So as not to reveal the existence of a given account name, the link can always be enabled.

3. The user enters their local account name. As the user types the account name, the CP reads the account name one character at a time. If at any moment the local account name matches an enrolled user, then the tile will enable an "Unenroll" link.

Alternative: So as not to reveal the existence of a given account name, the link can always be enabled

4. The user clicks on the Unenroll link

5. The CP prompts the user with a "This will disable bio authentications for user XYZ. Are you sure?"

6. The user chooses Yes

7. The CP sends a challenge to the user's device

8. The user successfully answers the challenge

9. The CP looks up the given local username in its BioEnrollment Data store and finds all matching BioEnrollment Data values. The CP lists the matching values by their DisplayName values and allows the user to select one or more

10. The user selects one or more authentications

11. The CP removes the user's BioEnrollment Data from local storage

##### 1.5.3 Reenrollment

It shall be possible for a user to reenroll. Reenrollment might be required or desired for reasons such as:

The user has injured their original finger/thumb and can't use it.

The user would like to add additional forms of bio authentication (e.g. multiple fingerprints)

Multiple users might want to be able to access the same shared account

Reenrollment works as follows:

1. From windows login screen, the user selects the system's CP tile (assuming windows 8+, which is a User First model)

2. If there is at least one enrolled user, then the CP will display a "Reenroll" link, but the link will be disabled while waiting for user input.

Alternative: So as not to reveal the existence of a given account name, the link can always be enabled.

3. The user enters their local account name. As the user types the account name, the CP reads the account name one character at a time. If at any moment the local account name matches an enrolled user, then the tile will enable a "Reenroll" link.

Alternative: So as not to reveal the existence of a given account name, the link can always be enabled

4. The user clicks on the Reenroll link

5. The CP prompts the user with a prompt something like "Replace all previous enrollments or add a new one to them? Replace Add"

6. The user selects either Replace or Add

7. The CP sends a challenge to the user's device

8. The user successfully answers the challenge

9. The user has not shown that they have any rights to log in to the local account, so the CP prompts the user for the current password

10. The CP calls Windows LSA (Local Security Authority) service to validate the password

11. The password validates, so the CP has verified that the user has rightful access to the local account and that the user can be bio authenticated with the provided bio identity email address

12. The CP creates the user's BioEnrollment Data as a tuple consisting of (LocalMachineName, LocalAccountName, BioIdentity).

13. If the user chose to Replace enrollment data, then the CP deletes all prior BioEnrollment Data

14. The CP stores the BioEnrollment Data in a secure manner

##### Authentication Type Rename

It shall be possible for a user to rename a previously saved authentication. The user may have mistyped the name pre-

viously or might have provided a vague name (such as “thumb”) and would like to refine it to a more specific value (such as “left thumb”).

#### Authentication Use Cases

##### BioAuthentication with single enrollment

A user may authenticate into their PC by providing their local userid and passing a biometric challenge. The user must first be enrolled at the local machine once prior to doing a bioauthentication. Bioauthentication works as follows:

1. From windows login screen, the user selects the system’s CP tile (assuming windows 8+, which is a User First model)
2. The user enters their local account name.
3. The user presses the standard windows login icon (the blue arrow in windows 8 and 10)
4. The CP looks up the given local username in its BioEnrollment Data store and finds the user’s BioEnrollment Data, which includes the user’s BioIdentity email
5. The CP sends a challenge to the user’s device
6. The user successfully answers the challenge
7. The CP returns a true to the windows LoginUI indicating that the user has passed authentication

##### BioAuthentication with multiple enrollments

A user may enroll multiple times (with different fingers, facial, voice, etc) and may wish to choose into their PC by providing their local userid and passing a biometric challenge. The user must first be enrolled at the local machine once prior to doing a bioauthentication. Bioauthentication works as follows:

1. From windows login screen, the user selects the system’s CP tile (assuming windows 8+, which is a User First model)
2. The user enters their local account name.
3. The user presses the standard windows login icon (the blue arrow in windows 8 and 10)
4. The CP looks up the given local username in its BioEnrollment Data store and finds multiple matching BioEnrollment Data values
5. The CP lists each BioEnrollment Data value by name and allows the user to choose which one they want to authenticate with
6. The user selects a named BioEnrollment Data value
7. The CP sends a challenge to the user’s device
8. The user successfully answers the challenge
9. The CP returns a true to the windows LoginUI indicating that the user has passed authentication

#### User Stories

Following are user scenarios, according to an embodiment:

As an iOS user, I want to download an app to my personal mobile device enabling me to pass biometric tests on it to log in to my personal PC as a local user

As an iOS user, I want to download an app to my personal mobile device enabling me to pass biometric tests on it to log in to my corporate PC as a domain user

As a user of a personal PC, I want to log in to my local account on my PC by authenticating with the fingerprint reader on my mobile device

As a corporate user of a corporate PC, I want to log into my AD account on my corporate PC by authenticating with the fingerprint reader of my personal mobile device

As an enterprise admin, I want to require my users to use multiple authentication factors when logging into their PC, such as possession of a device and bio metrics.

FIG. 17 depicts a screen show of a login screen, a link to the CP, according to an embodiment.

FIG. 18 depicts another screen shot showing a CP that does only fingerprint, according to an embodiment.

As a corporate user of a corporate PC, I want to log into my AD account by authenticating into Password Station

The user would click on something in the CP that would launch the AIMS secure browser, challenge the user to authenticate (using questions, bio, . . . anything in the authentication framework).

Upon success, the user exits the AIMS browser and is allowed access into their PC without a password

##### Authenticating without a Password

The function of a typical CP is to capture credentials (typically userid and password) and serialize them into a known buffer format so that they can be submitted to the LSA (Local Security Administrator).

In the case of a smartcard login, the smartcard appears to contain the needed credentials. The smartcard CP would then get the (encrypted) credentials off of the smart card and provide them, along with a user-entered PIN to the LSA.

There appear to be other ways to authenticate the user (e.g., without a password).

<http://stackoverflow.com/questions/41869313/how-to-write-a-ksp-to-hook-up-into-kerb-certificate-logon>

RSA provides a CP for logging in to a PC without a password. An embodiment involves an RSA server.

LSA supports custom Authentication Packages. An Authentication Package is a DLL that analyzes the credentials collected from the CP (e.g. userid/password, smartcard/pin, etc)

Determines if a security principal is allowed to log on  
Establishes a new logon session and creates a logon identifier

Passes security info to the LSA for the principal’s security token

Vendors can create a custom Security Support Provider (SSP) using the MS SSP Interface. For example, Microsoft ships a sample SampSSP with the Platform Software Development Kit (SDK) (in win 7 SDK at C:\Program Files\Microsoft

SDKs\Windows\v7.1\Samples\security\authentication\sampssp).

A Security Package is deployed as a DLL of one of the following types:

SSP/AP (Security Support Provider/Authentication Package)  
SSP

#### Example #1: RFID CP A

The following describes an example (includes code) of a CP that allows one to log in with just an RFID card, however one must store your userid/password on one’s machine ahead of time. Then, when one does a ctrl-alt-del, one sees an RFID CP tile. If one holds one’s RFID card near the reader, it confirms one’s identity, decrypts one’s stored credentials, and submits them to LSA for normal authentication.

See <https://www.codeandsec.com/VVindows-RFID-Login-Credential-Provider>

In an embodiment,  
Create a .net CLI to encrypt/write or read/decrypt a user’s password using MS DPAPI.

The password storage CLI would always run from the logonUI.exe’s context, so anything it encrypts would only be readable by the same account

Using the RFID CP as an example, expect the user to enter their userid and click on bioAuthenticate button

## 21

The CP would look up the user's biold from the cloud, verify licensing, and if all passes, submit a bio challenge to imageWare on behalf of the user

Assuming the user passes the challenge, the CP would then read the encrypted user credentials from local storage and build a set of credentials (with userid+ password) and submit to LSA for authentication

Limitations of this approach:

If a user changes their password, bio authentication ceases to work.

The system is responsible for storing the password somewhere, as discussed in detail herein.

Local storage for local accounts might not be too risky because only one machine is at risk and the embodiment can use MS DPAPI to encrypt data.

Domain account is risky because the password needs to be transmitted and stored in the cloud, putting the data it much larger risk during transport and storage.

#### Example #2: RFID CP B

A similar RFID example exists, but with a lot more code in it. It appears to work the same as the first example, in that one must store the userid and password and then use the RFID authentication to indicate that one may decrypt the credentials and submit to LSA for authentication.

<https://github.com/tylermenezes/Rfid-Credential-Provider> and <https://medium.com/@tylermenezes/rfid-credential-provider-d0bf8ef29b16>

#### Example #3: MySmartLogon

MySmartLogon has a youtube showing how an rfid can be treated similarly to a smartcard to authenticate without a password. It appears to generate PKI certificates for the user during enrollment/provisioning and then the user can log on with the certificate later without a password. It appears that the certificate is stored either in the RFID (not likely) or the RFID's value is used as a key to look up the certificate from somewhere else.

#### Windows 10 Hello

Windows 10 Hello provides new Authentication and user identity support. (C# SDK is included for windows 10 and Universal Windows Platform (UWP) apps).

Biometric logins

Windows Unlock with Hello Companion Devices (using a phone or a USB attached device as part of login).

Example: Carry a phone in their pocket that is already paired with PC over Bluetooth. Upon hitting the spacebar on their PC, their phone receives a notification. Approve it and the PC simply unlocks

Logging in without a password

Credential locker for locally storing and retrieving credentials safely

Fingerprint bio authentication at application level

Although the invention is described herein with reference to the preferred embodiment, one skilled in the art will readily appreciate that other applications may be substituted for those set forth herein without departing from the spirit and scope of the present invention. Accordingly, the invention should only be limited by the Claims included below.

The invention claimed is:

1. A computer-implemented method, comprising: receiving and storing, at a cloud universal identification server having a digital storage, a plurality of identifying

## 22

attributes associated with a user and one or more identifying attributes associated with a computing device;

receiving and storing, at the cloud universal identification server, registration information that associates a mobile device with the plurality of identifying attributes associated with the user;

during a login process to the computing device associated with the user, receiving, at the cloud universal identification server, a request to authenticate the login process at the computing device,

the request being received from credential provider code that was previously installed on the computing device, wherein the credential provider code was previously configured to recognize the mobile device, and

wherein the request indicates that the mobile device was selected for authentication purposes;

confirming, at the cloud universal identification server, the identity of computing device of the request for authentication by positively matching the identity of the computing device with one of previously registered computing devices, registered at the cloud universal identification server;

in response to the request indicating that the mobile device was selected for authentication purposes, retrieving, from a database, a protocol for communicating with the mobile device;

transmitting, by the cloud universal identification server and in accordance with the retrieved protocol, at least three authentication factors associated with the user, the at least three authentication factors for delivery to the mobile device, and the at least three authentication factors obtained or derived from authentication factors associated with the user previously stored in the storage of the cloud universal identification server; and

upon receiving, at the cloud universal identification server and from the mobile device, data that satisfies the at least three authentication factors, transmitting for delivery to the credential provider code of the computing device, authentication data causing the login process to be successful;

wherein one or more steps are performed on at least a processor coupled to at least a memory.

2. The method of claim 1, wherein the computing device is communicably connected to the cloud universal identification server via the previously installed credential provider code and wherein such credential provider code recognizes the mobile device via a previous registration of the mobile device to the credential provider code.

3. The method of claim 1, wherein the entity initiating the login process is not the user.

4. The method of claim 1, wherein the computing device is any of: a desktop or laptop computer.

5. The method of claim 1, wherein an attribute of the plurality of identifying attributes is any of: an email address, a social login, an ID from the digital storage, a numeric ID, a computer login, or Active Directory ID.

6. The method of claim 1, wherein an app was previously downloaded on the mobile device for purposes of associating the mobile device with the cloud universal identification server and with the credential provider code of the computing device.

7. The method of claim 1, wherein the computing device is configured to send a notification to the mobile device causing the mobile device to request authentication at the cloud universal identification server.

## 23

8. The method of claim 1, wherein a plurality of computing devices associated with the user are registered at the cloud universal identification server.

9. The method of claim 1, wherein a plurality of mobile devices associated with the user are registered at the cloud universal identification server.

10. An apparatus, comprising:

a first receiving and storing processor configured to receive and store, at a cloud universal identification server having a digital storage, a plurality of identifying attributes associated with a user and one or more identifying attributes associated with a computing device;

wherein the receiving and storing processor is further configured to receive and store, at the cloud universal identification server, registration information that associates a mobile device with the plurality of identifying attributes associated with the user;

wherein the receiving and storing processor is further configured to receive, during a login process to the computing device associated with the user, receiving, at the cloud universal identification server, a request to authenticate the login process at the computing device, the request being received from credential provider code that was previously installed on the computing device, wherein the credential provider code was previously configured to recognize the mobile device, and wherein the request indicates that the mobile device was selected for authentication purposes;

a confirming processor configured to confirm, at the cloud universal identification server, the identity of computing device of the request for authentication by positively matching the identity of the computing device with one of previously registered computing devices, registered at the cloud universal identification server;

a retrieving processor configured to retrieve, from a database, a protocol for communicating with the mobile device, in response to the request indicating that the mobile device was selected for authentication purposes;

a transmitting processor configured to transmit, by the cloud universal identification server and in accordance with the retrieved protocol, at least three authentication factors associated with the user, the at least three authentication factors for delivery to the mobile device, and the at least three authentication factors obtained or derived from authentication factors associated with the user previously stored in the storage of the cloud universal identification server;

wherein the transmitting processor is further configured to transmit, upon receiving, at the cloud universal identification server and originating from the mobile device, data that satisfies the at least three authentication factors for delivery to the credential provider code of the computing device, the authentication data causing the login process to be successful; and

at least one memory operable to store computer program instructions executable by at least one of said processors.

11. The apparatus of claim 10, wherein the computing device is communicably connected to the cloud universal identification server via the previously installed credential provider code and wherein such credential provider code recognizes the mobile device via a previous registration of the mobile device to the credential provider code.

12. The apparatus of claim 10, wherein the entity initiating the login process is not the user.

## 24

13. The apparatus of claim 10, wherein the computing device is any of: a desktop or laptop computer.

14. The apparatus of claim 10, wherein an attribute of the plurality of identifying attributes is any of: an email address, a social login, an ID from the digital storage, a numeric ID, a computer login, or Active Directory ID.

15. The apparatus of claim 10, wherein an app was previously downloaded on the mobile device for purposes of associating the mobile device with the cloud universal identification server and with the credential provider code of the computing device.

16. The apparatus of claim 10, wherein the computing device is configured to send a notification to the mobile device causing the mobile device to request authentication at the cloud universal identification server.

17. The apparatus of claim 10, wherein a plurality of computing devices associated with the user are registered at the cloud universal identification server.

18. The apparatus of claim 10, wherein a plurality of mobile devices associated with the user are registered at the cloud universal identification server.

19. A non-transitory computer readable medium having stored thereon a computer program, said computer program comprising a program code which, when executed by a processor, performs the steps of:

receiving and storing, at a cloud universal identification server having a digital storage, a plurality of identifying attributes associated with a user and one or more identifying attributes associated with a computing device;

receiving and storing, at the cloud universal identification server, registration information that associates a mobile device with the plurality of identifying attributes associated with the user;

during a login process to the computing device associated with the user, receiving, at the cloud universal identification server, a request to authenticate the login process at the computing device,

the request being received from credential provider code that was previously installed on the computing device, wherein the credential provider code was previously configured to recognize the mobile device, and wherein the request indicates that the mobile device was selected for authentication purposes;

confirming, at the cloud universal identification server, the identity of computing device of the request for authentication by positively matching the identity of the computing device with one of previously registered computing devices, registered at the cloud universal identification server;

in response to the request indicating that the mobile device was selected for authentication purposes, retrieving, from a database, a protocol for communicating with the mobile device;

transmitting, by the cloud universal identification server and in accordance with the retrieved protocol, at least three authentication factors associated with the user, the at least three authentication factors for delivery to the mobile device, and the at least three authentication factors obtained or derived from authentication factors associated with the user previously stored in the storage of the cloud universal identification server; and

upon receiving, at the cloud universal identification server and from the mobile device, data that satisfies the at least three authentication factors, transmitting for deliv-



ery to the credential provider code of the computing device, authentication data causing the login process to be successful.

\* \* \* \* \*